



# 1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz

## Waveguide Terminations Technical Data Sheet

PEWTR1003

### Features

- WR-51
- 15 GHz to 22 GHz
- Square Cover Flange
- 1.02:1 Typical VSWR
- 1 Watt Average Power Handling

### Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

### Description

The PEWTR1003 is a WR-51 waveguide termination / load that operates in the frequency range of 15 GHz to 22 GHz. This WR-51 waveguide termination has a typical VSWR of 1.02:1. These waveguide termination designs are made of painted brass copper and incorporate a standard Square Cover flanges.

Pasternack waveguide terminations / loads are designed so virtually all applied power is absorbed, thus assuring a low VSWR. The power rating on this WR-51 termination is 1 watt, other detailed specifications and a diagram drawing can be found on this datasheet PDF below. Pasternack offers a complete family of waveguide terminations that are in-stock for same day shipment.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	15		22	GHz
VSWR		1.02:1		
Return Loss		15		dB
Insertion Loss			22	dB
Input Power (CW)			1	Watts

### Mechanical Specifications

Weight 0.216 lbs [97.98 g]

Description	Flange	Waveguide
Designation	None	WR-51
Type	Square Cover	
Material	Brass	Brass

### Environmental Specifications

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz PEWTR1003](#)





## 1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz

### Waveguide Terminations Technical Data Sheet


PEWTR1003

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

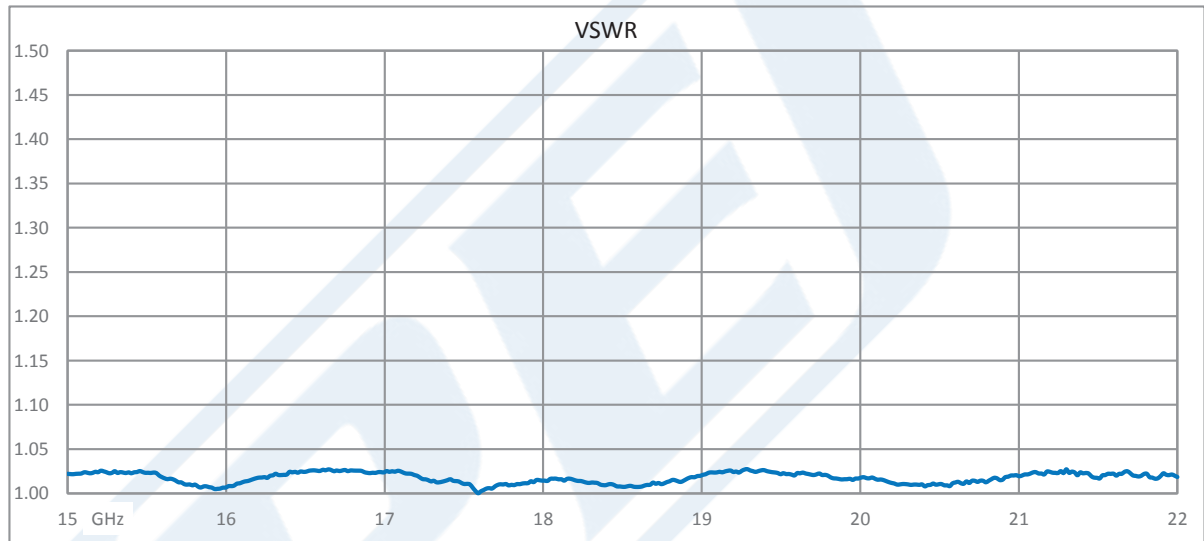

1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz PEWTR1003](#)

URL: <https://www.pasternack.com/1-watts-wr-51-rf-load-15-22-ghz-commercial-grade-pewtr1003-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PEWTR1003 CAD Drawing

1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz

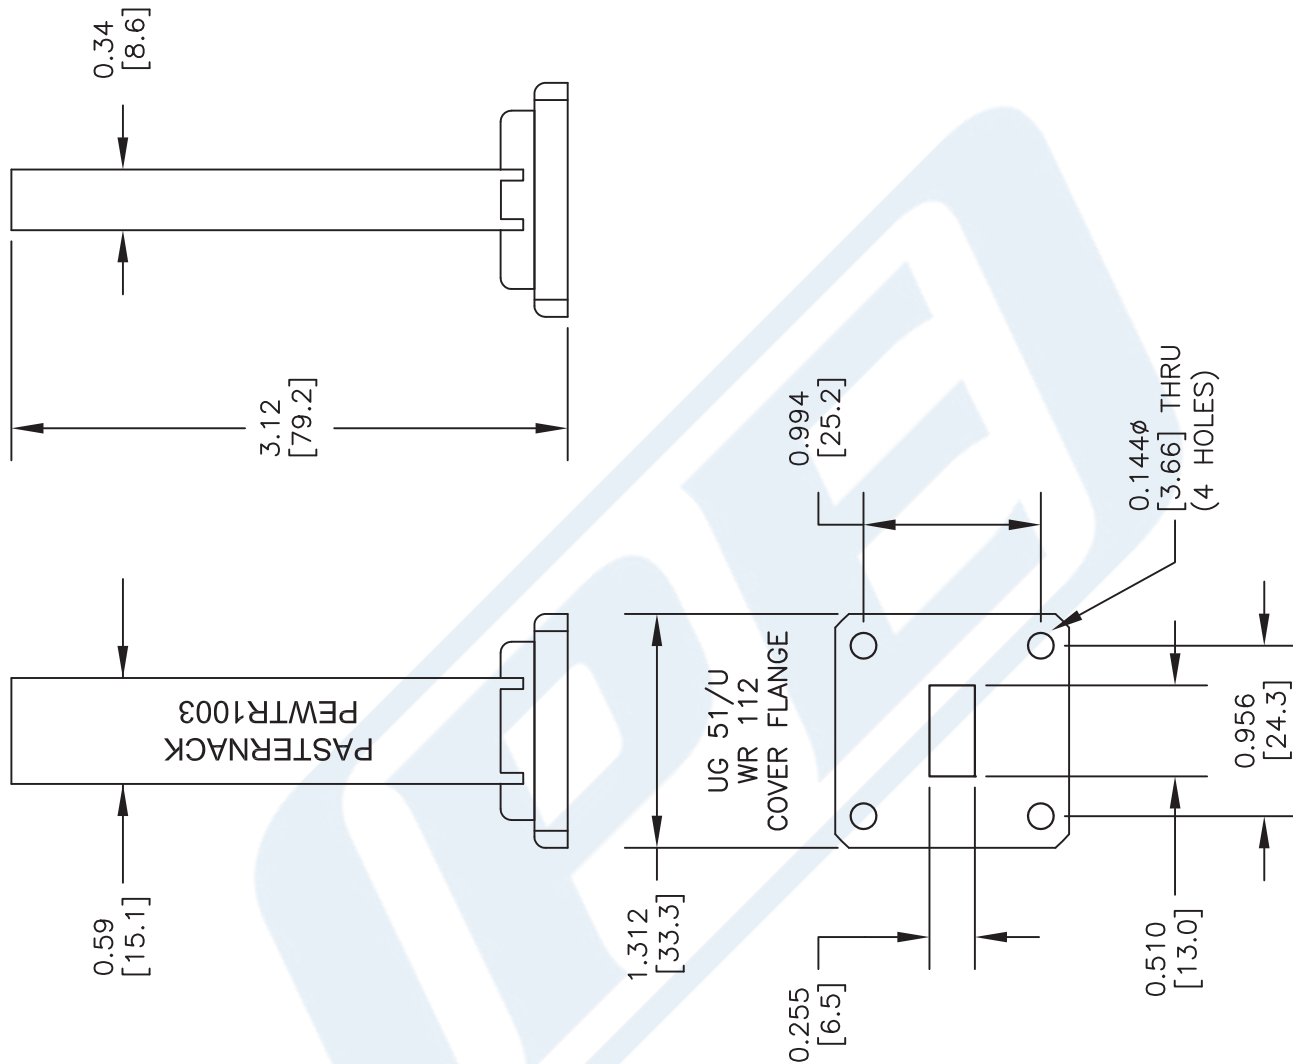

**STANDARD TOLERANCES**  
 .X ±0.2  
 .XX ±0.1  
 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

**NOTES:**  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PEWTR1003**

CAGE CODE **53919**

CAD FILE 122316

SCALE N/A

SIZE A

2233

**PE PASTERNAK®**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com