REV. STATUS. SHEETS	REV.LTR.	-				REVISIONS			
	SHEET NO	1				LTR	DESCRIPTION	DATE	BY
							Released	6/20/96	JCL

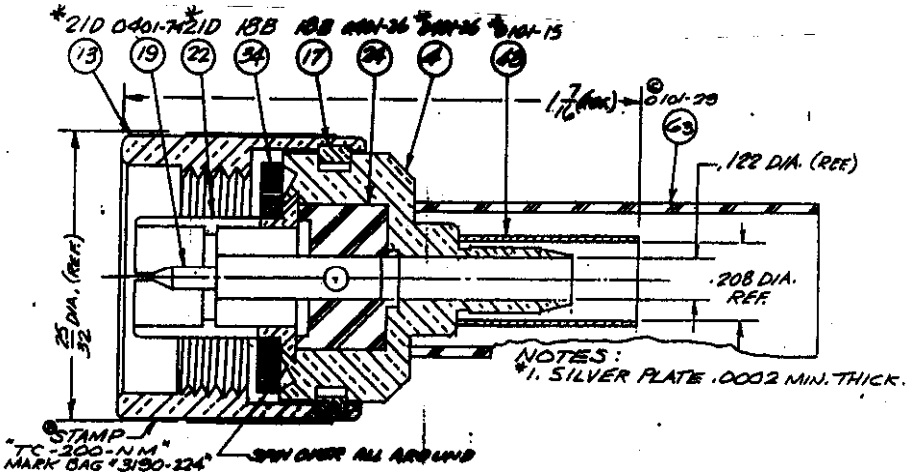

Materials & Finishes

Center Contact: Gold(30u" over 50u" Copper) Plated Brass; Soldered
Outer Contact: Silver(200u") Plated Brass; Crimped
Other Metal Parts: Silver(200u") Plated Brass
Dielectric: Teflon
Gasket: Silicone Rubber

Electrical Properties

Impedance: 50 Ohms
Working Voltage: 1000 volts (RMS max)
VSWR: 1.25:1 (max) up to 2 GHz
Insertion Loss: <0.1 dB up to 2 GHz

Jnless otherwise specified dimensions in inches. Tolerances are applicable when specified.	Approvals			TIMES MICROWAVE SYSTEMS Wallingford, CT 06492		
	Drawn	JCL	6/20/96	TC-200-NM Type N Male Connector for LMR-200		
	Check					
	PrjMg			Size A	Code Ident 68999	Dwg.No. 3190-224
	PrdMg					
	QAMgr			Scale: NA		Sheet: 1 of 1