

WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange



Gain Horns Technical Data Sheet

PEWAN1051

Features

- · Circular Waveguide Interface
- 87 GHz to 100 GHz

Applications

- · Antenna Measurements
- · Wireless Communication

- 20 dBi Nominal Gain
- UG-387/U Round Cover Flange
- Laboratory Use
- Microwave Radio Systems

Description

Waveguide conical gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance across a broad bandwidth. Pasternack's PEWAN1051 WR-10 waveguide conical gain horn antenna operating from 87 GHz to 100 GHz with a nominal 20 dBi gain is part of our full line of RF components available for same-day shipping. This Pasternack circular horn antenna has a gold plated brass body and a precision tolerance UG-387/U round cover flange. The PEWAN1051 WR-10 waveguide conical gain horn antenna offers low gain variation across its operating frequency range.

Configuration

Design

Pattern Polarization WR-10 Conical Gain Horn

Directional Linear

Electrical Specifications

20	100	GHz dBi
20		dBi
20		Degrees
16		Degrees
1.15:1		

Mechanical Specifications

Size

 Length
 1.9 in [48.26 mm]

 Width
 0.75 in [19.05 mm]

 Height
 0.75 in [19.05 mm]

 Weight
 0.066 lbs [29.94 g]

Waveguide Interface

Waveguide Size WR-10
Flange Type Round Cover
Flange Designation UG-387/U

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange PEWAN1051

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange



Gain Horns Technical Data Sheet

PEWAN1051


Body Material and Plating

Brass, Gold

Compliance Certifications (see product page for current document)

Plotted and Other Data

Typical Performance Data

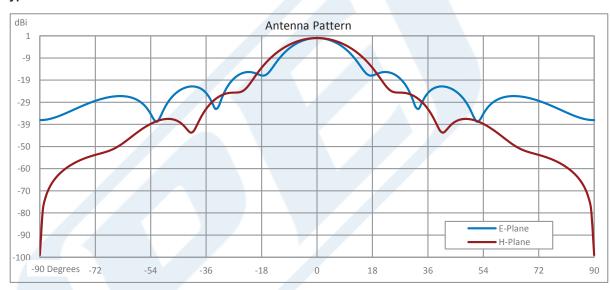

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange PEWAN1051

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451




WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange



Gain Horns Technical Data Sheet

PEWAN1051

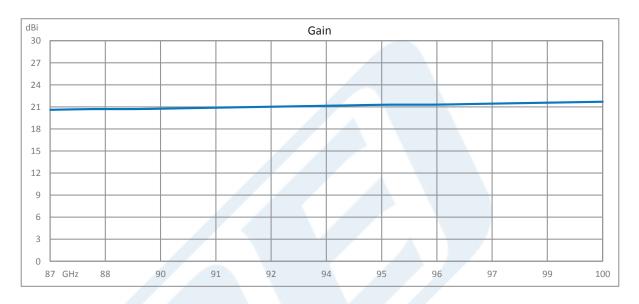

WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange PEWAN1051

URL: https://www.pasternack.com/wr-10-waveguide-gain-horn-antenna-20dbi-ug-387-round-flange-pewan1051-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWAN1051 CAD DrawingWR-10 Waveguide Conical Gain Horn Antenna Operating from 87 GHz to 100 GHz with a Nominal 20 dBi Gain with UG-387/U Round Cover Flange

