

# WR-10 Waveguide Magic Tee, UG-387/U-Mod Round Cover Flange Operating from 75 GHz to 110 GHz



# Waveguide Magic Tees Technical Data Sheet

PEWMT1000

## **Features**

- 75 to 110 GHz Frequency Range
- E to H Port Isolation 25 dB Min
- Collinear Port Isolation 15 dB Min

- 1 dB Insertion loss
- W Band

## **Applications**

- Test and Measurement
- Military Communications
- Commercial Communications
- · Wireless Communications
- SATCOM

#### Description

Pasternack's PEWMT1000 is a magic, or hybrid tee that operates from 75 GHz to 110 GHz, W band. It is a 4 port device that is internally tuned to optimize matching, balance, and isolation. Magic tees have an H-plane (sum) port, an E-plane (difference) port, and two collinear ports. A signal applied to the H port will be equally divided between the two collinear ports. A signal applied to the E port will be divided between the two collinear ports but with a 180 degree phase difference. Similarly, when two in-phase signals of equal amplitude are applied to the collinear ports, these will be added together at the H-plane (sum) port and subtracted from one another at the E-plane (difference) port.

## **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	75		110	GHz
Insertion Loss			1	dB
Isolation, E-H (Difference-Sum) Ports	25			dB
Isolation, Collinear Ports	15			dB

## **Mechanical Specifications**

Size

Weight 0.125 lbs [56.7 g]

Waveguide Size WR-10
Flange Type Round Cover
Flange Designation UG-387/U-Mod
Body Material and Plating Aluminum, Gold
Body Plating Specification ASTMB488

#### **Environmental Specifications**

Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-10 Waveguide Magic Tee, UG-387/U-Mod Round Cover Flange Operating from 75 GHz to 110 GHz PEWMT1000

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623

Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com






# WR-10 Waveguide Magic Tee, UG-387/U-Mod Round Cover Flange Operating from 75 GHz to 110 GHz



# Waveguide Magic Tees Technical Data Sheet

## PEWMT1000

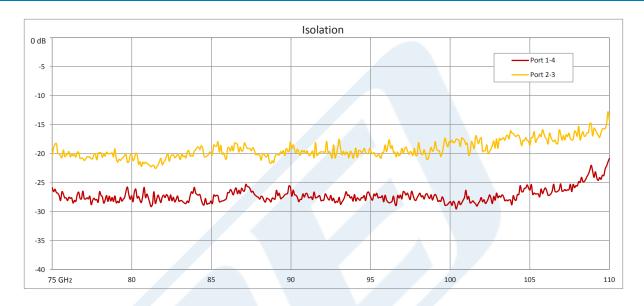

WR-10 Waveguide Magic Tee, UG-387/U-Mod Round Cover Flange Operating from 75 GHz to 110 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-10 Waveguide Magic Tee, UG-387/U-Mod Round Cover Flange Operating from 75 GHz to 110 GHz PEWMT1000

URL: https://www.pasternack.com/wr-10-waveguide-magic-tee-ug387-mod-round-110-ghz-pewmt1000-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



# **PEWMT1000 CAD Drawing**

WR-10 Waveguide Magic Tee, UG-387/U-Mod Round Cover Flange Operating from 75 GHz to 110 GHz

