



SMA Male to SMA Male Cable 48 Inch
Length Using RG142 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3385LF-48

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: RG142

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range | DC | | 8 | GHz |
| VSWR | | | 1.4:1 | |
| Return Loss | | | 15.56 | dB |
| Velocity of Propagation | | 69.2 | | % |
| RF Shielding | 90 | | | dB |
| Capacitance | | 29.4 [96.46] | | pF/ft [pF/m] |
| Operating Voltage (AC) | | | 500 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|------|-------|-------|----|-------|
| Frequency | 0.5 | 1 | 2 | 4 | 8 | GHz |
| Insertion Loss (Typ.) | 0.518 | 0.72 | 0.936 | 1.396 | | dB |

Mechanical Specifications

Cable Assembly

| | |
|----------|---------------------|
| Length* | 48 in [121.92 cm] |
| Diameter | 0.315 in [8 mm] |
| Weight | 0.214 lbs [97.07 g] |

Cable

| | |
|--------------------------------------|---------------------------|
| Cable Type | RG142 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 2 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 48 Inch Length Using RG142 Coax, RoHS PE3385LF-48](#)



SMA Male to SMA Male Cable 48 Inch
Length Using RG142 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3385LF-48

| | |
|------------------------------|----------------------------|
| Shield Layer 1 | Silver Plated Copper Braid |
| Shield Layer 2 | Silver Plated Copper Braid |
| Jacket Material | FEP, Tan |
| Jacket Diameter | 0.195 in [4.95 mm] |
| One Time Minimum Bend Radius | 0.984 in [24.99 mm] |
| Repeated Minimum Bend Radius | 2 in [50.8 mm] |

Connectors

| Description | Connector 1 | Connector 2 |
|-------------------------------|--------------------|--------------------|
| Type | SMA Male | SMA Male |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 50µ in. minimum | 50µ in. minimum |
| Dielectric Type | Teflon | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum | 100µ in. minimum |
| Hex Size | 5/16 in | 5/16 in |
| Torque | 5 in-lbs [0.57 Nm] | 5 in-lbs [0.57 Nm] |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 48 Inch Length Using RG142 Coax, RoHS PE3385LF-48](#)



SMA Male to SMA Male Cable 48 Inch Length Using RG142 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3385LF-48

How to Order

Part Number Configuration:

PE3385LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3385LF-12 = 12 inches long cable
PE3385LF-100cm = 100 cm long cable

SMA Male to SMA Male Cable 48 Inch Length Using RG142 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 48 Inch Length Using RG142 Coax, RoHS PE3385LF-48](#)


URL: <https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe3385lf-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3385LF-48 CAD Drawing

SMA Male to SMA Male Cable 48 Inch Length Using RG142 Coax, RoHS

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in Inches |
| | |

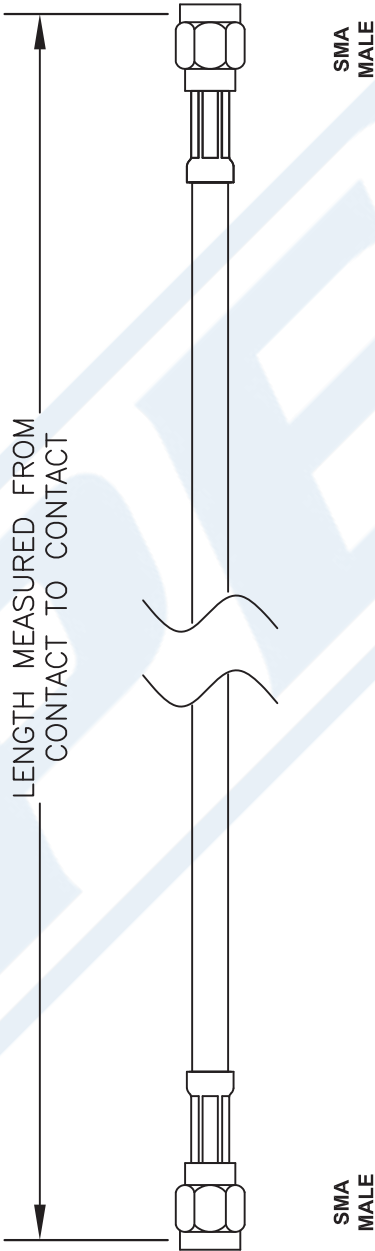

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE3385LF-XX

| | | | | | |
|--------|----------------|-----------------|-----------|--------|-----|
| REV. A | FSCM NO. 53919 | CAD FILE 021308 | SCALE N/A | SIZE A | 127 |
|--------|----------------|-----------------|-----------|--------|-----|

**PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com