



## N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax

### RF Cable Assemblies Technical Data Sheet

PE34222-48

#### Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: RG225

#### Features

- Max Frequency 400 MHz
- Double Shielded
- PTFE (FG) Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE34222-48 type N male right angle to type N male right angle 48 inch cable using RG225 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG225 coax. The PE34222-48 type N male to type N male cable assembly operates to 400 MHz. The right angle type N interfaces on the RG225 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description                          | Minimum | Typical      | Maximum | Units        |
|--------------------------------------|---------|--------------|---------|--------------|
| Frequency Range                      | DC      |              | 400     | MHz          |
| Capacitance                          |         | 32.4 [106.3] |         | pF/ft [pF/m] |
| Dielectric Withstanding Voltage (AC) |         |              | 2,500   | Vrms         |

#### Specifications by Frequency

| Description           | F1    | F2   | F3    | F4  | F5    | Units |
|-----------------------|-------|------|-------|-----|-------|-------|
| Frequency             | 50    | 100  | 250   | 500 | 1,000 | MHz   |
| Insertion Loss (Typ.) | 0.225 | 0.25 | 0.325 |     |       | dB    |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax PE34222-48](#)



N Male Right Angle to N Male Right Angle Cable  
48 Inch Length Using RG225 Coax

RF Cable Assemblies Technical Data Sheet

PE34222-48

**Mechanical Specifications**

**Cable Assembly**

|          |                      |
|----------|----------------------|
| Length*  | 48 in [121.92 cm]    |
| Diameter | 0.8 in [20.32 mm]    |
| Weight   | 1.061 lbs [481.26 g] |

**Cable**

|                                      |                            |
|--------------------------------------|----------------------------|
| Cable Type                           | RG225                      |
| Impedance                            | 50 Ohms                    |
| Inner Conductor Type                 | Stranded                   |
| Inner Conductor Material and Plating | Copper, Silver             |
| Dielectric Type                      | PTFE                       |
| Number of Shields                    | 2                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Shield Layer 2                       | Silver Plated Copper Braid |
| Jacket Material                      | PTFE (FG), Tan             |
| Jacket Diameter                      | 0.43 in [10.92 mm]         |

**Connectors**

| Description                       | Connector 1        | Connector 2        |
|-----------------------------------|--------------------|--------------------|
| Type                              | N Male Right Angle | N Male Right Angle |
| Specification                     | MIL-STD-348A       | MIL-STD-348A       |
| Impedance                         | 50 Ohms            | 50 Ohms            |
| Contact Material and Plating      | Brass, Gold        | Brass, Gold        |
| Dielectric Type                   | Teflon             | Teflon             |
| Body Material and Plating         | Brass, Nickel      | Brass, Nickel      |
| Coupling Nut Material and Plating | Brass, Nickel      | Brass, Nickel      |

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

**Notes:**

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax PE34222-48](#)



## N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax

### RF Cable Assemblies Technical Data Sheet

PE34222-48

#### How to Order

Part Number Configuration:

PE34222

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE34222-12 = 12 inches long cable  
PE34222-100cm = 100 cm long cable

N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax PE34222-48](#)


URL: <https://www.pasternack.com/n-male-n-male-rg225u-cable-assembly-pe34222-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34222-48 CAD Drawing

N Male Right Angle to N Male Right Angle Cable 48 Inch Length Using RG225 Coax

| REVISIONS |                 |          |          |
|-----------|-----------------|----------|----------|
| REV.      | DESCRIPTION     | DATE     | APPROVED |
| A         | INITIAL RELEASE | 07/23/19 | SELLIS   |

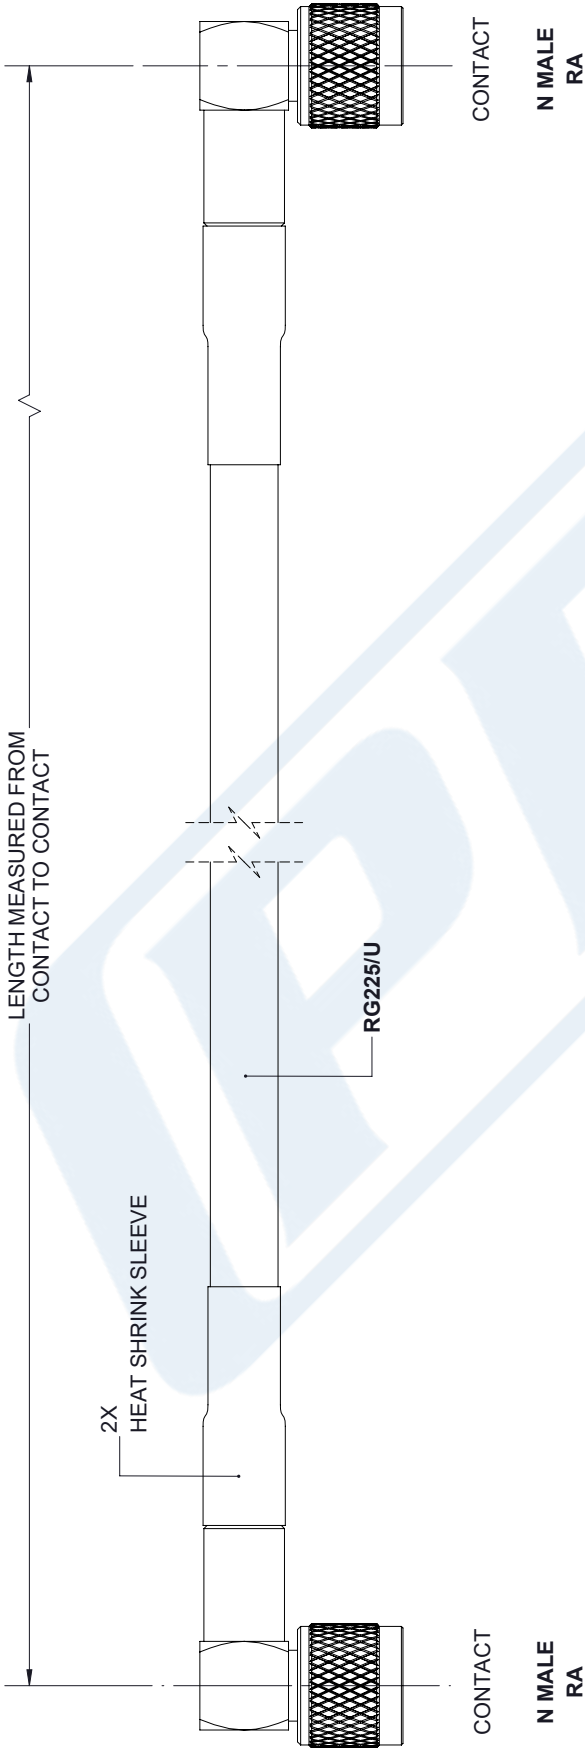

|  |        |             |       |
|--|--------|-------------|-------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |        |             |       |
| TOLERANCES:  |        |             |       |
| X±.2   | [5.08] | FRACTIONS   |       |
| .XX±.01  | [.25]  |             | ±.132 |
| .XXX±.005  | [.13]  | ANGLES ± 1° |       |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.  |        |             |       |
| THIRD-ANGLE PROJECTION   |        |             |       |
|  |        |             |       |

|   |       |          |             |
|---|-------|----------|-------------|
| <b>PE PASTERNAK</b><br>an INFINITI brand  |       |          |             |
| Pasternack Enterprises, Inc.<br>P.O. Box 16759, Irvine, CA 92623.<br>Phone: 1.949.261.1920   1.866.727.8376<br>Fax: 1.949.261.7451<br>www.pasternack.com   e-mail: sales@pasternack.com |       |          |             |
| SIZE  | CAGE  | DRAWN BY | PART NUMBER |
| A   | 53919 | K.DANG   | PE34222     |
|   |       |          | REV         |
|   |       |          | A           |

|  |     |    |   |
|--|-----|----|---|
| THE INFORMATION AND<br>DESIGN IN THIS DOCUMENT<br>IS THE PROPERTY OF<br>PASTERNAK CORPORATION.<br>ALL RIGHTS RESERVED. |     |    |   |
| SHEET  | 1   | OF | 1 |
| SCALE  | N/A |    |   |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.