



Reverse Polarity SMA Male to Reverse Polarity SMA  
Male Cable Using RG142 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE34750LF

**Configuration**

- Connector 1: SMA Male Reverse Polarity
- Connector 2: SMA Male Reverse Polarity
- Cable Type: RG142

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	1	3	5		GHz
Insertion Loss (Typ.)						dB/m
	0.04	0.13	0.24	0.36		dB/ft
	0.13	0.43	0.79	1.18		dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

**Mechanical Specifications**

**Cable Assembly**

Diameter 0.312 in [7.92 mm]

**Cable**

Cable Type RG142  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 2  
Shield Layer 1 Silver Plated Copper Braid  
Shield Layer 2 Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax, LF Solder, RoHS PE34750LF](#)



Reverse Polarity SMA Male to Reverse Polarity SMA  
Male Cable Using RG142 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE34750LF

Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.984 in [24.99 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male Reverse Polarity	SMA Male Reverse Polarity
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	QQ-N-290
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	QQ-N-290	QQ-N-290
Hex Size	5/16 inch	5/16 inch
Torque	5 in-lbs [0.57 Nm]	5 in-lbs [0.57 Nm]

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

**Notes:**

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax, LF Solder, RoHS PE34750LF](#)



Reverse Polarity SMA Male to Reverse Polarity SMA  
Male Cable Using RG142 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE34750LF

**How to Order**

Part Number Configuration:

**PE34750LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE34750LF-12 = 12 inches long cable  
PE34750LF-100cm = 100 cm long cable

Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax, LF Solder, RoHS PE34750LF](https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe34750lf-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe34750lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE34750LF CAD Drawing

Reverse Polarity SMA Male to Reverse Polarity SMA Male  
Cable Using RG142 Coax, LF Solder, RoHS

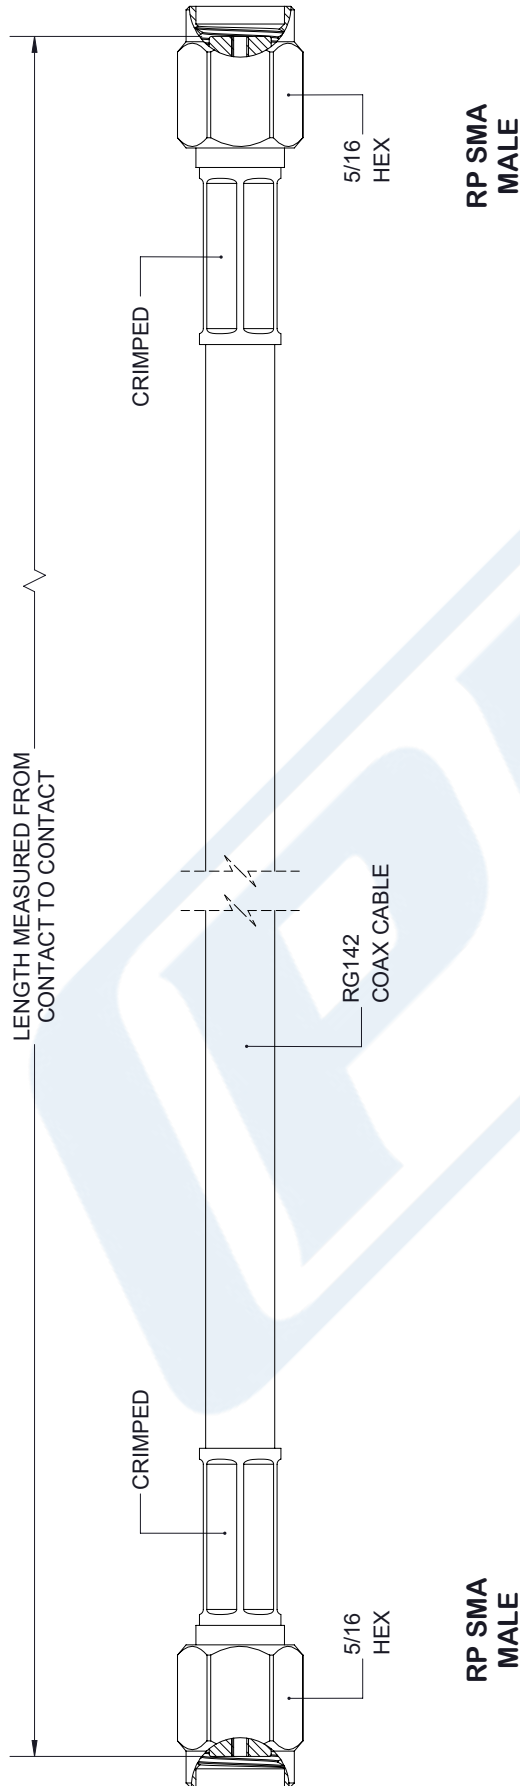

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

<b>PASTERNAK®</b> <small>THE ENGINEER'S RF SOURCE</small> Pasternack Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623 <b>Phone:</b> (949) 261-1920   <b>Fax:</b> (949) 261-7451 <b>Website:</b> <a href="http://www.pasternack.com">www.pasternack.com</a>   <b>E-Mail:</b> <a href="mailto:sales@pasternack.com">sales@pasternack.com</a>		DWG TITLE <b>PE34750LF</b>		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].	
		<b>CAGE CODE</b> 53919	CAD FILE 110117	SCALE N/A	SIZE A 7361