



BNC Twinax Plug to BNC Twinax Plug Cable
120 Inch Length Using 78 Ohm RG108 Coax

RF Cable Assemblies Technical Data Sheet

PE3480-120

Configuration

- Connector 1: BNC Twinax Plug
- Connector 2: BNC Twinax Plug
- Cable Type: RG108

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
Capacitance		19.7 [64.63]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Length	120 in [304.8 cm]
Diameter	0.571 in [14.5 mm]
Weight	0.467 lbs [211.83 g]

Cable

Cable Type	RG108
Impedance	78 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE (LD)
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.235 in [5.97 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Plug to BNC Twinax Plug Cable 120 Inch Length Using 78 Ohm RG108 Coax PE3480-120](#)



BNC Twinax Plug to BNC Twinax Plug Cable
120 Inch Length Using 78 Ohm RG108 Coax

RF Cable Assemblies Technical Data Sheet

PE3480-120

Connectors

Description	Connector 1	Connector 2
Type	BNC Twinax Plug	BNC Twinax Plug
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	78 Ohms	78 Ohms
Contact Material and Plating	Brass/Beryllium Copper, Gold	Brass/Beryllium Copper, Gold
Contact Plating Specification	30μ in. minimum	30μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100μ in. minimum	100μ in. minimum

Compliance Certifications (visit www.Pasternack.com for current document)

For RoHS Compliant version, use PE3480LF-120. Contact Pasternack if product cannot be found.
REACH Compliant 12/17/2015

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Plug to BNC Twinax Plug Cable 120 Inch Length Using 78 Ohm RG108 Coax PE3480-120](#)



BNC Twinax Plug to BNC Twinax Plug Cable
120 Inch Length Using 78 Ohm RG108 Coax

RF Cable Assemblies Technical Data Sheet

PE3480-120

How to Order

Part Number Configuration:

PE3480

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3480-12 = 12 inches long cable
PE3480-100cm = 100 cm long cable

BNC Twinax Plug to BNC Twinax Plug Cable 120 Inch Length Using 78 Ohm RG108 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Plug to BNC Twinax Plug Cable 120 Inch Length Using 78 Ohm RG108 Coax PE3480-120](#)

URL: <http://www.pasternack.com/bnc-twinax-plug-bnc-twinax-plug-rg108au-cable-assembly-pe3480-120-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3480-120 CAD Drawing

BNC Twinax Plug to BNC Twinax Plug Cable 120 Inch Length Using 78 Ohm RG108 Coax

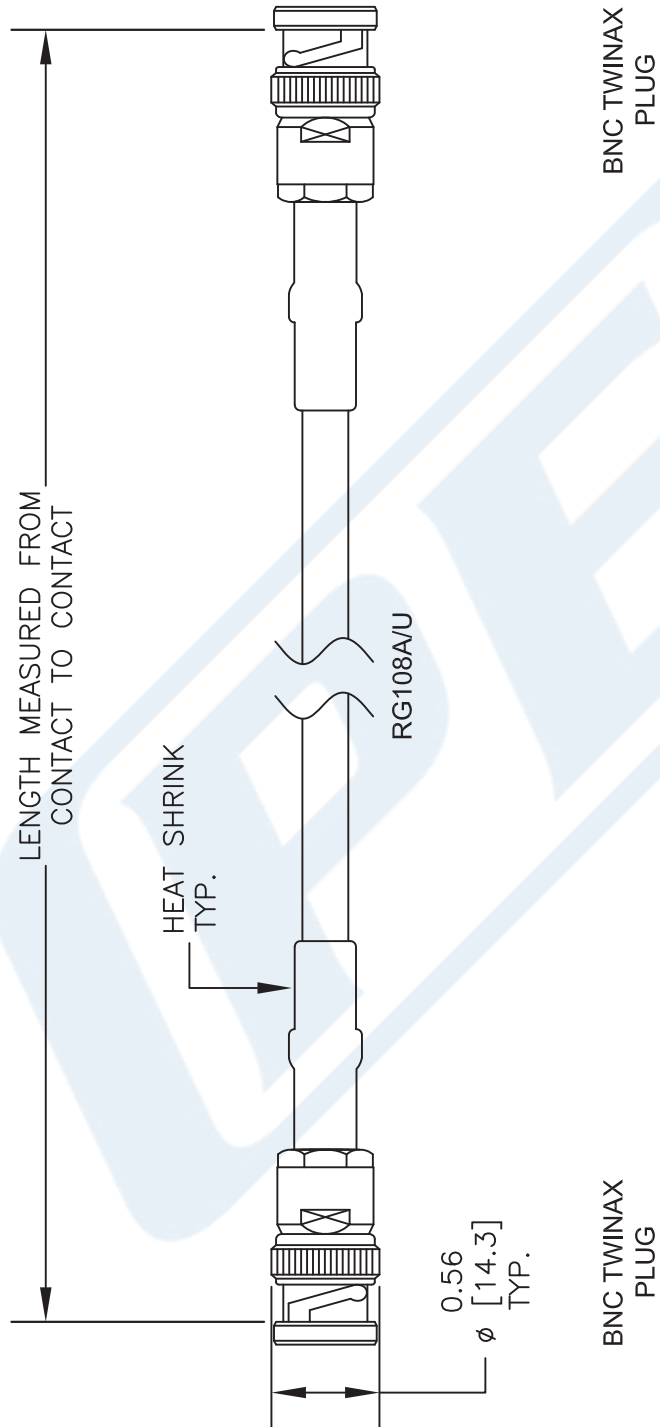

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE3480

FSCM NO. 53919

CAD FILE 030816

SCALE N/A

SIZE A

2233

(PE) PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com