



N Male to N Female Cable 72 Inch Length  
Using 1/2 inch Helical Coax, RoHS

TECHNICAL DATA SHEET

PE37969-72

**N Male to N Female Cable 72 Inch Length Using 1/2 inch Helical Coax, RoHS**

**Configuration**

Connector 1	N Male
Connector 2	N Female
Cable Type	1/2" Helical

**Electrical Specifications**

Frequency Range, GHz	DC to 2.7
Impedance, Ohms	50
Maximum VSWR	1.12:1
Passive Intermodulation, dBc	-156

**Typical Performance by Frequency**

**Frequency 1**

Frequency, MHz	1000
VSWR	1.05:1
Insertion Loss	0.022 dB/ft + 0.02 dB [ 0.07 dB/m + 0.02 dB ]

**Frequency 2**

Frequency, GHz	2.2
VSWR	1.07:1
Insertion Loss	0.034 dB/ft + 0.02 [ 0.11 dB/m + 0.02 dB ]

**Frequency 3**

Frequency, GHz	2.7
VSWR	1.08:1
Insertion Loss	0.038 dB/ft + 0.02 dB [ 0.12 dB/m + 0.02 dB ]

**Mechanical Specifications**

**Cable Assembly**

Cable Type	1/2" Helical
------------	--------------

**Temperature**

Temperature Operating Range, deg C	-55 to +85
------------------------------------	------------

**Size**

Length, in [cm]	72 [182.88]
One Time Minimum Bend Radius, in [mm]	2.75 [69.85]
Repeated Minimum Bend Radius, in [mm]	4.9 [124.46]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female Cable 72 Inch Length Using 1/2 inch Helical Coax, RoHS PE37969-72](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



N Male to N Female Cable 72 Inch Length  
Using 1/2 inch Helical Coax, RoHS

TECHNICAL DATA SHEET

PE37969-72

**Cable**

Center Conductor Type	Solid
Cable Inner Conductor	Copper Clad Aluminum
No of Shields	1
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.54 [13.72]

**Connector 1**

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Outer Conductor Material and Plating	Brass, Silver
Coupling Nut Material and Plating	Brass, Nickel
Hex Size, mm	19
Body Material and Plating	Brass, Silver
Dielectric Type	PTFE

**Connector 2**

Type	N Female
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Body Material and Plating	Brass, Silver
Dielectric Type	PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

**Plotted and Other Data**

Notes:	Values at 25 °C, sea level
--------	----------------------------

N Male to N Female Cable 72 Inch Length Using 1/2 inch Helical Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female Cable 72 Inch Length Using 1/2 inch Helical Coax, RoHS PE37969-72](http://www.pasternack.com/n-male-n-female-1-2-inch-helical-cable-assembly-pe37969-72-p.aspx)

URL: <http://www.pasternack.com/n-male-n-female-1-2-inch-helical-cable-assembly-pe37969-72-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE37969-72 CAD Drawing

N Male to N Female Cable 72 Inch Length Using 1/2 inch Helical Coax, RoHS

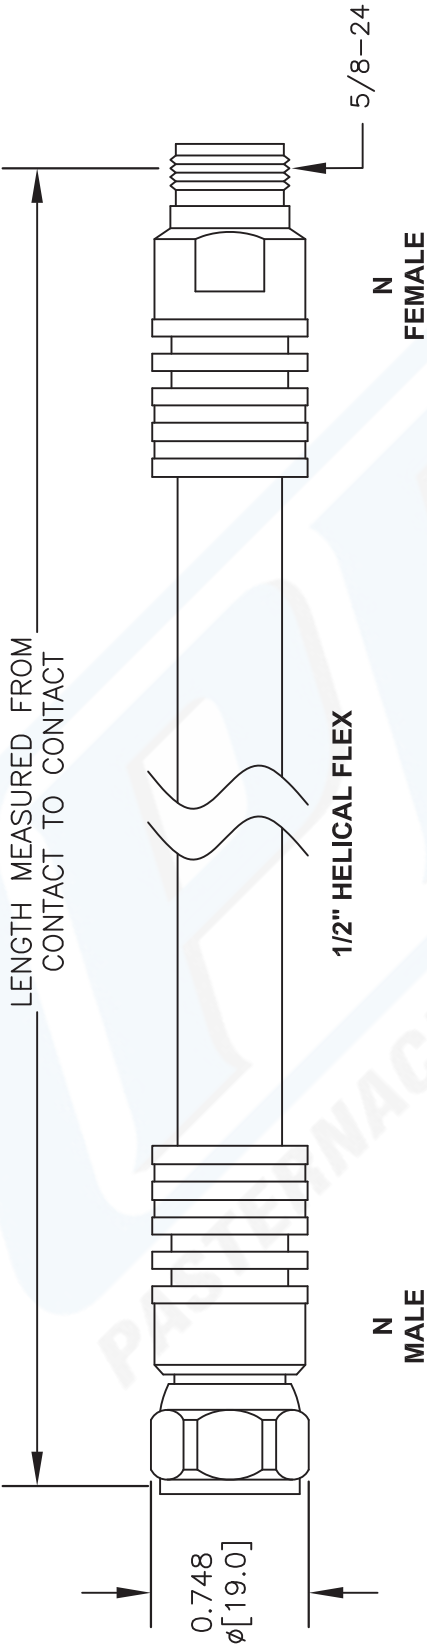

How To Order					
Part Number Configuration		Examples	Part # Ext.	Length In Inches	Length In Centimeters
PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div>		PE3000LF-100	-12	12"	-25CM
		PE3000-100	-24	24"	-50CM
		PE3000LF-100CM	-36	36"	-75CM
		PE3000-100CM	-48	48"	-100CM
			-60	60"	-125CM
00 - 99999			-xx	Custom Length	Custom Length
LF = RoHS Compliant					
< Blank > = Standard					
Note: LF applies only to RF cables					
_____ Length					

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - 3. DIMENSIONS ARE IN INCHES [mm].
  - 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE

PE37969

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 111407

SCALE N/A

SIZE A

2233