



# SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FL Coax, RoHS

## TECHNICAL DATA SHEET

PE39424-12

### Hand Formable SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FL Coax, RoHS

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

#### Configuration

Connector 1  
 Connector 2  
 Cable Type

SMA Male Right Angle  
 SMA Male Right Angle  
 PE-SR402FL

#### Electrical Specifications

Frequency Range, GHz  
 Impedance, Ohms  
 Maximum VSWR  
 Velocity of Propagation, %  
 RF Shielding, dB  
 Maximum Operating Voltage, Vrms

DC to 10  
 50  
 1.35:1  
 69  
 100  
 335

#### Typical Electrical Specifications

##### Frequency 1

Frequency, MHz  
 Insertion Loss

1000  
 0.119 dB/ft [ 0.39 dB/m ]

##### Frequency 2

Frequency, GHz  
 Insertion Loss

5  
 0.28 dB/ft [ 0.92 dB/m ]

##### Frequency 3

Frequency, GHz  
 Insertion Loss

10  
 0.421 dB/ft [ 1.38 dB/m ]

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FL Coax, RoHS PE39424-12](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





SMA Male Right Angle to SMA Male Right Angle Semi-Flexible  
 Precision Cable 12 Inch Length Using PE-SR402FL Coax, RoHS

## TECHNICAL DATA SHEET

PE39424-12

### Mechanical Specifications

#### Cable Assembly

Cable Type PE-SR402FL

#### Temperature

Temperature Operating Range, deg C -55 to +125

#### Size

Length, in [mm] 12 [304.8]  
 Diameter, in [mm] 0.139 [3.53]  
 Weight, lbs [g] 0.027 [12.25]  
 One Time Minimum Bend Radius, in [mm] 0.75 [19.05]  
 Repeated Minimum Bend Radius, in [mm] 1.57 [39.88]

#### Cable

Center Conductor Type Solid  
 Cable Inner Conductor Copper, Silver  
 No of Shields 1  
 Dielectric Type PTFE

#### Connector 1

Type SMA Male Right Angle  
 Configuration Right Angle

#### Connector 2

Type SMA Male Right Angle  
 Configuration Right Angle

### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes

### Plotted and Other Data

Notes: Values at 25 °C, sea level

SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FL Coax, RoHS PE39424-12](http://www.pasternack.com/sma-male-sma-male-pe-sr402fl-cable-assembly-pe39424-12-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-male-pe-sr402fl-cable-assembly-pe39424-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


PE39424-12 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision  
Cable 12 Inch Length Using PE-SR402FL Coax, RoHS

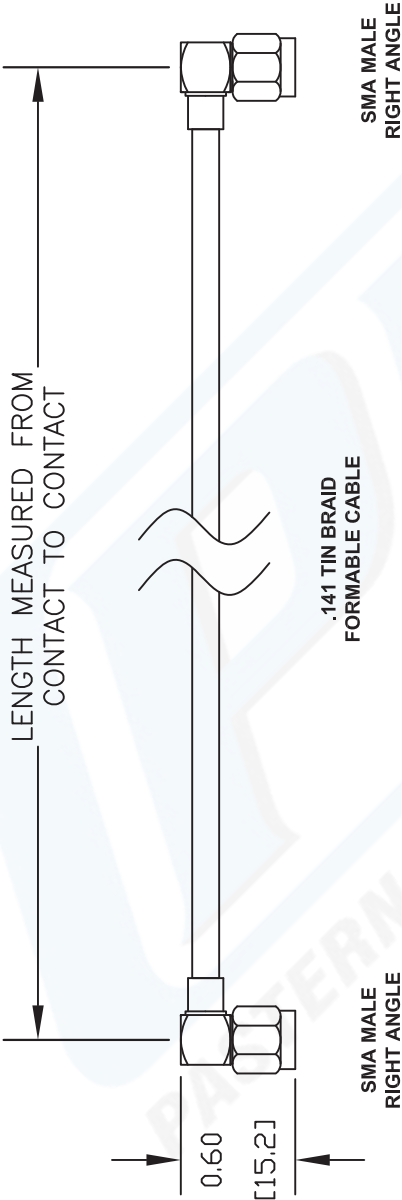

Note: This part is lead free.

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<div>Part Number Configuration</div> <div>PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div></div> <div>00 - 99999</div> <div>LF = Lead Free</div> <div>&lt; Blank &gt; = Standard</div> <div>Note: LF applies only to RF cables</div>		<div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div>	<div>-12</div> <div>-24</div> <div>-36</div> <div>-48</div> <div>-60</div> <div>-xx</div>	<div>12"</div> <div>24"</div> <div>36"</div> <div>48"</div> <div>60"</div> <div>Custom Length</div>	<div>25Cm</div> <div>50Cm</div> <div>75Cm</div> <div>100Cm</div> <div>125Cm</div> <div>Custom Length</div>



**PASTERNAK ENTERPRISES®**  
ESTABLISHED 1972

**PASTERNAK ENTERPRISES, INC.**  
P.O. BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
COAXIAL & FIBER OPTICS

DWG TITLE  
**PE39424**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

REV. -	FSCM NO. 53919	CAD FILE 041912	SCALE N/A	SIZE A	2231
--------	----------------	-----------------	-----------	--------	------