



SMA Male to N Female Bulkhead Semi-Flexible Precision  
Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39469-12

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a FEP jacket and are RoHS compliant,

**Features**

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

**Configuration**

Connector 1  
Connector 2  
Cable Type

SMA Male  
N Female Bulkhead  
PE-SR402FLJ

**Electrical Specifications**

Frequency Range	DC to 11 GHz
Impedance	50 Ohms
Velocity of Propagation	70 %
Group Delay	1.43 ns/ft [4.69 ns/m]
RF Shielding	100 dB

**Performance by Frequency**

**Frequency 1**

Frequency	500 MHz
Insertion Loss	0.279 dB

**Frequency 2**

Frequency	1000 MHz
Insertion Loss	0.319 dB

**Frequency 3**

Frequency	2.5 GHz
Insertion Loss	0.379 dB

**Frequency 4**

Frequency	5 GHz
Insertion Loss	0.48 dB

**Frequency 5**

Frequency	11 GHz
-----------	--------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS PE39469-12](#)



SMA Male to N Female Bulkhead Semi-Flexible Precision  
Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39469-12

Insertion Loss

0.643 dB

**Mechanical Specifications**

**Size**

Length

12 in [304.8 mm]

Diameter

0.866 in [22 mm]

Cable Color

Black

One Time Minimum Bend Radius

0.315 in [8 mm]

Repeated Minimum Bend Radius

1.575 in [40.01 mm]

**Cable**

Cable Type

PE-SR402FLJ

Inner Conductor Type

Solid

Cable Inner Conductor

Copper Clad Steel, Silver

No of Shields

1

Dielectric Type

PTFE

Jacket Material

FEP

Jacket Diameter

0.161 in [4.09 mm]

**Connector 1**

Type

SMA Male

Configuration

Straight

Coupling Nut Material and Plating

Passivated Stainless Steel

Hex Size

5/16 in.

Torque

8 in-lbs [0.9 Nm]

Body Material and Plating

Brass, Gold

**Connector 2**

Type

N Female Bulkhead

Configuration

Straight

Mount Method

Bulkhead

Inner Conductor Material and Plating

Phosphor Bronze, Gold

Body Material and Plating

Brass, Nickel

Dielectric Type

PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

REACH Compliant

06/18/2012

**Plotted and Other Data**

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS PE39469-12](#)



SMA Male to N Female Bulkhead Semi-Flexible Precision  
Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39469-12

**How to Order**

Part Number Configuration:

**PE39469-12**

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE39469-12-12 = 12 inches long cable  
PE39469-12-100cm = 100 cm long cable

SMA Male to N Female Bulkhead Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Semi-Flexible Precision Cable 12 Inch Length Using PE-SR402FLJ Coax, RoHS PE39469-12](http://www.pasternack.com/sma-male-n-female-pe-sr402flj-cable-assembly-pe39469-12-p.aspx)


URL: <http://www.pasternack.com/sma-male-n-female-pe-sr402flj-cable-assembly-pe39469-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39469-12 CAD Drawing

SMA Male to N Female Bulkhead Semi-Flexible Precision Cable

12 Inch Length Using PE-SR402FLJ Coax, RoHS

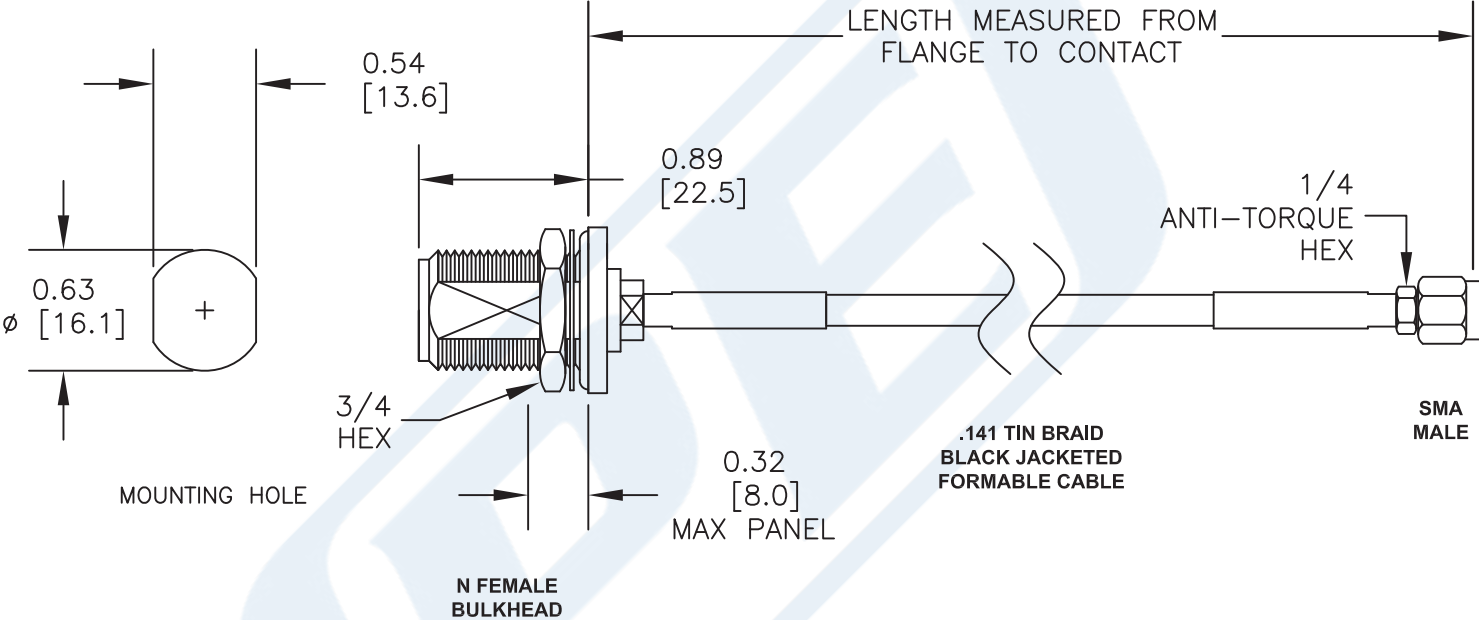

Note: This part is lead free.

<div><div><div><div>PE</div><div>PASTERNAK®</div><div>THE ENGINEER'S RF SOURCE</div></div><div><div>Pasternack Enterprises, Inc.</div><div>P.O. Box 16759   Irvine   CA   92623</div><div>Phone: (949) 261-1920   Fax: (949) 261-7451</div><div>Website: <a href="http://www.pasternack.com">www.pasternack.com</a>   E-Mail: <a href="mailto:sales@pasternack.com">sales@pasternack.com</a></div></div></div></div>					<div>NOTES:</div> <div><div>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.</div><div>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.</div><div>3. DIMENSIONS ARE IN INCHES [mm].</div><div>4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.</div></div>				
<div>DWG TITLE</div> <div>PE39469</div>				<div>FSCM NO. 53919</div>					
<div>CAD FILE</div>		<div>012215</div>	<div>SCALE N/A</div>	<div>SIZE A</div>	<div>2233</div>				