



## TNC Male to TNC Female Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FL Coax, RoHS

### TECHNICAL DATA SHEET

PE39474-6

#### Hand Formable TNC Male to TNC Female Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FL Coax, RoHS

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

#### Configuration

Connector 1  
Connector 2  
Cable Type

TNC Male  
TNC Female  
PE-SR405FL

#### Electrical Specifications

Frequency Range, GHz  
Impedance, Ohms  
Maximum VSWR  
Velocity of Propagation, %  
RF Shielding, dB  
Maximum Operating Voltage, Vrms

DC to 6  
50  
1.35:1  
69  
100  
500

#### Typical Performance by Frequency

##### Frequency 1

Frequency, MHz  
Insertion Loss

1000  
0.225 dB/ft [ 0.74 dB/m ]

##### Frequency 2

Frequency, GHz  
Insertion Loss

5  
0.549 dB/ft [ 1.8 dB/m ]

#### Mechanical Specifications

##### Cable Assembly

Cable Type

PE-SR405FL

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FL Coax, RoHS PE39474-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





## TNC Male to TNC Female Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FL Coax, RoHS

### TECHNICAL DATA SHEET

PE39474-6

#### Size

Length, in [mm]	6 [152.4]
Diameter, in [mm]	0.086 [2.18]
Weight, lbs [g]	0.013 [5.9]
One Time Minimum Bend Radius, in [mm]	0.37 [9.4]

#### Cable

Center Conductor Type	Solid
Cable Inner Conductor	Copper Clad Steel, Silver
No of Shields	1
Dielectric Type	PTFE

#### Connector 1

Type	TNC Male
Configuration	Straight

#### Connector 2

Type	TNC Female
Configuration	Straight

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

#### Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

TNC Male to TNC Female Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FL Coax, RoHS PE39474-6](http://www.pasternack.com/tnc-male-tnc-female-pe-sr405fl-cable-assembly-pe39474-6-p.aspx)

URL: <http://www.pasternack.com/tnc-male-tnc-female-pe-sr405fl-cable-assembly-pe39474-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE39474-6 CAD Drawing

TNC Male to TNC Female Semi-Flexible Precision Cable  
6 Inch Length Using PE-SR405FL Coax, RoHS

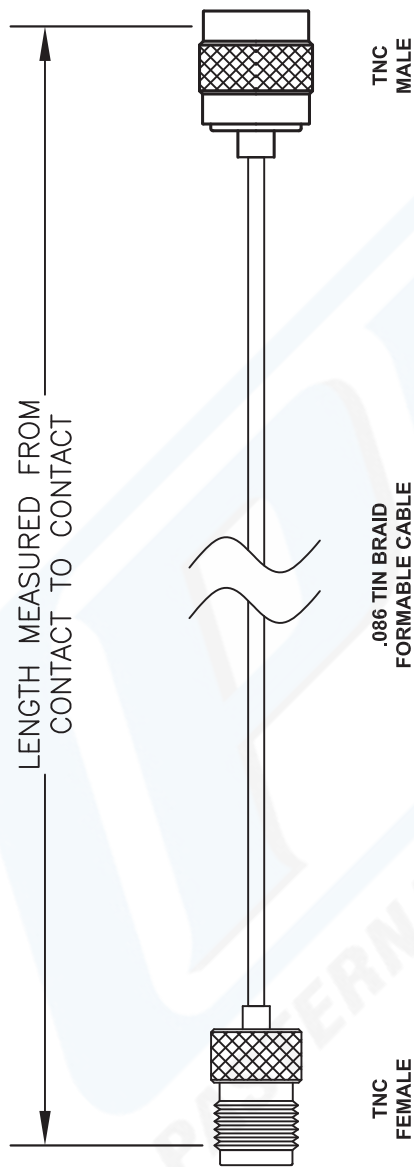

Note: This part is lead free.

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration		Examples			
PE3 [zzz] [yy] - [xx] [uu]		-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
00 - 99999		-xx	Custom Length	-xxCM	Custom Length
LF = Lead Free < Blank > = Standard					
Note: LF applies only to RF cables					



**PASTERNAK ENTERPRISES®**  
ESTABLISHED 1972

**PASTERNAK ENTERPRISES, INC.**  
P.O. BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
COAXIAL & FIBER OPTICS

DWG TITLE  
**PE39474**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

REV. -	FSCM NO. 53919	CAD FILE 041912	SCALE N/A	SIZE A	2231
--------	----------------	-----------------	-----------	--------	------