



N Male to N Male Cable Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3C0039

N Male to N Male Cable Using LMR-240 Coax

Configuration

Connector 1	N Male
Connector 1 Specification	MIL-STD-348A
Connector 2	N Male
Connector 2 Specification	MIL-STD-348A
Cable Type	LMR-240

Electrical Specifications

Impedance, Ohms	50
-----------------	----

Mechanical Specifications

Cable Assembly

Cable Type	LMR-240
------------	---------

Temperature

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85
Diameter, in [mm]	0.83 [21.08]
Weight, lbs [g]	0.132 [59.87]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	0.75 [19.05]
Repeated Minimum Bend Radius, in [mm]	2.5 [63.5]

Cable

No of Shields	2
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.24 [6.1]

Connector 1

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	18
Torque, in-lbs [Nm]	9 [1.02]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable Using LMR-240 Coax PE3C0039](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





N Male to N Male Cable Using LMR-240 Coax

TECHNICAL DATA SHEET

PE3C0039

Connector 2

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	18
Torque, in-lbs [Nm]	9 [1.02]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)


Plotted and Other Data

Notes: Values at 25 °C, sea level

URL: <http://www.pasternack.com/n-male-n-male-lmr240-cable-assembly-pe3c0039-p.aspx>

N Male to N Male Cable Using LMR-240 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

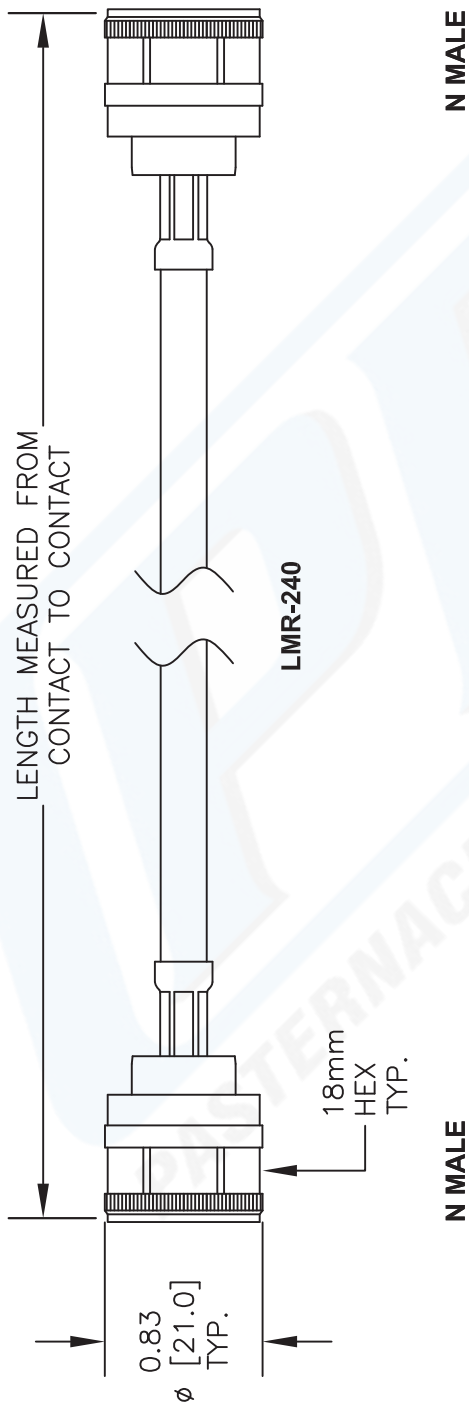

How To Order					
Part Number Configuration		Examples			
PE3 [zzz] [yy] - [xx] [uu]		PE3000LF-100		-12	
		PE3000-100		-24	
		PE3000LF-100CM		-36	
		PE3000-100CM		-48	
				-60	
				-xx	
00 - 99999					
LF = RoHS Compliant					
< Blank > = Standard					
Note: LF applies only to RF cables					

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE
PE3C0039

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

FSCM NO. 53919

CAD FILE 013113

SCALE N/A

SIZE A

2233