



## SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet


PE3C0055LF-60

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male Right Angle
- Cable Type: LMR-240

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

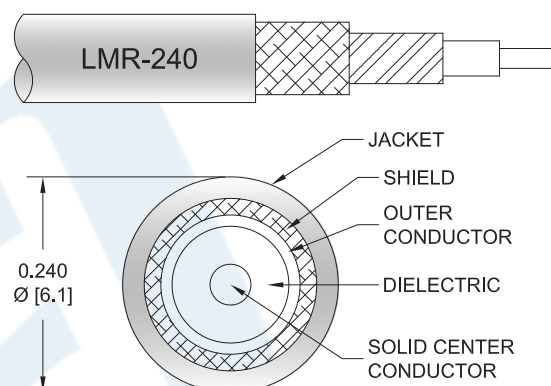

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C0055LF-60 SMA male to SMA male right angle 60 inch cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240 coax. The PE3C0055LF-60 SMA male to SMA male cable assembly operates to 5.8 GHz. The right angle SMA interface on the LMR-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder PE3C0055LF-60](#)



# SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder

## RF Cable Assemblies Technical Data Sheet

PE3C0055LF-60

### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units           |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range               | DC      |              | 5.8     | GHz             |
| VSWR                          |         |              | 1.6:1   |                 |
| Velocity of Propagation       |         | 84           |         | %               |
| RF Shielding                  | 90      |              |         | dB              |
| Group Delay                   |         | 1.21 [3.97]  |         | ns/ft [ns/m]    |
| Capacitance                   |         | 24.2 [79.4]  |         | pF/ft [pF/m]    |
| Inductance                    |         | 0.06 [0.2]   |         | uH/ft [uH/m]    |
| DC Resistance Inner Conductor |         | 3.2 [10.5]   |         | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor |         | 3.89 [12.76] |         | Ω/1000ft [Ω/Km] |
| Jacket Spark                  |         |              | 5,000   | Vrms            |

### Specifications by Frequency

| Description           | F1    | F2    | F3    | F4    | F5    | Units |
|-----------------------|-------|-------|-------|-------|-------|-------|
| Frequency             | 0.5   | 1     | 2     | 4     | 5.8   | GHz   |
| Insertion Loss (Max.) | 0.564 | 0.699 | 0.875 | 1.115 | 1.319 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB connector loss.

### Mechanical Specifications

#### Cable Assembly

|          |                    |
|----------|--------------------|
| Length*  | 60 in [152.4 cm]   |
| Diameter | 0.379 in [9.63 mm] |

#### Cable

|                                      |                     |
|--------------------------------------|---------------------|
| Cable Type                           | LMR-240             |
| Impedance                            | 50 Ohms             |
| Inner Conductor Type                 | Solid               |
| Inner Conductor Material and Plating | Copper              |
| Dielectric Type                      | PE (F)              |
| Number of Shields                    | 2                   |
| Shield Layer 1                       | Aluminum Tape       |
| Shield Layer 2                       | Tinned Copper Braid |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder PE3C0055LF-60](#)



SMA Male to SMA Male Right Angle Cable 60 Inch  
Length Using LMR-240 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C0055LF-60

|                              |                        |
|------------------------------|------------------------|
| Jacket Material              | PE, Black              |
| Jacket Diameter              | 0.24 in [6.1 mm]       |
| One Time Minimum Bend Radius | 0.75 in [19.05 mm]     |
| Repeated Minimum Bend Radius | 2.5 in [63.5 mm]       |
| Bending Moment               | 0.25 lbs-ft [0.34 N-m] |
| Flat Plate Crush             | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength             | 80 lbs [36.29 Kg]      |

**Connectors**

| Description                       | Connector 1        | Connector 2          |
|-----------------------------------|--------------------|----------------------|
| Type                              | SMA Male           | SMA Male Right Angle |
| Impedance                         | 50 Ohms            | 50 Ohms              |
| Mating Cycles                     | 500                |                      |
| Contact Material and Plating      | Brass, Gold        | Brass, Gold          |
| Dielectric Type                   | PTFE               | PTFE                 |
| Body Material and Plating         | Brass, Gold        | Brass, Gold          |
| Coupling Nut Material and Plating | Brass, Gold        | Brass, Gold          |
| Hex Size                          | 5/16 inch          | 5/16 inch            |
| Torque                            | 3 in-lbs [0.34 Nm] | 3 in-lbs [0.34 Nm]   |

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder PE3C0055LF-60](#)




SMA Male to SMA Male Right Angle Cable 60 Inch  
Length Using LMR-240 Coax , LF Solder

## RF Cable Assemblies Technical Data Sheet

PE3C0055LF-60

### Typical Performance Data

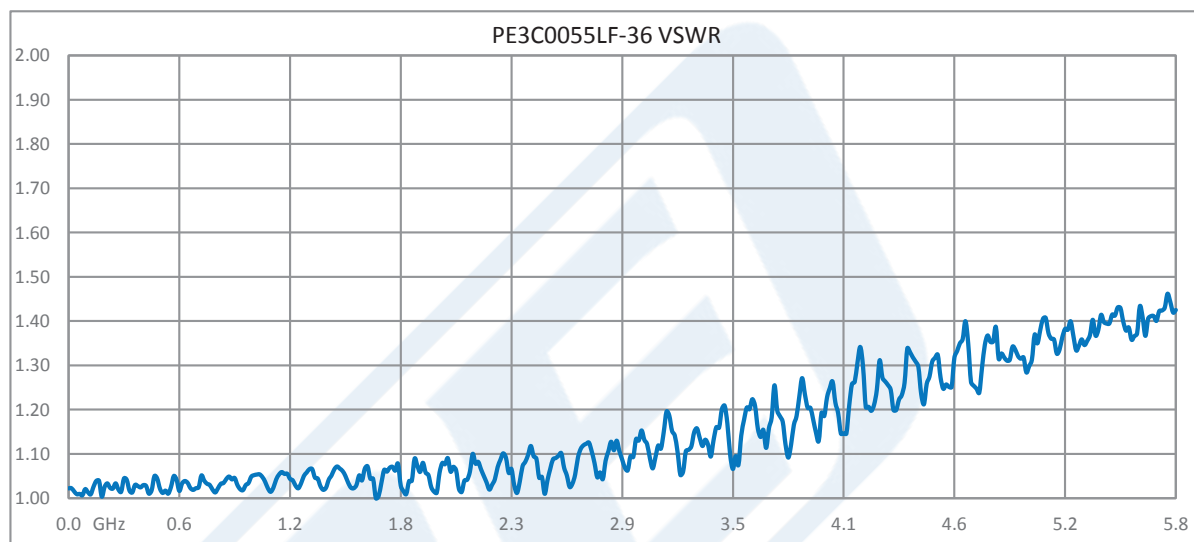

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder PE3C0055LF-60](#)



## SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3C0055LF-60

#### How to Order

Part Number Configuration:

**PE3C0055LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C0055LF-12 = 12 inches long cable  
PE3C0055LF-100cm = 100 cm long cable


SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable 60 Inch Length Using LMR-240 Coax , LF Solder PE3C0055LF-60](#)

URL: <https://www.pasternack.com/sma-male-sma-male-lmr240-cable-assembly-pe3c0055lf-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3C0055LF-60 CAD Drawing**  
SMA Male to SMA Male Right Angle Cable 60 Inch  
Length Using LMR-240 Coax , LF Solder

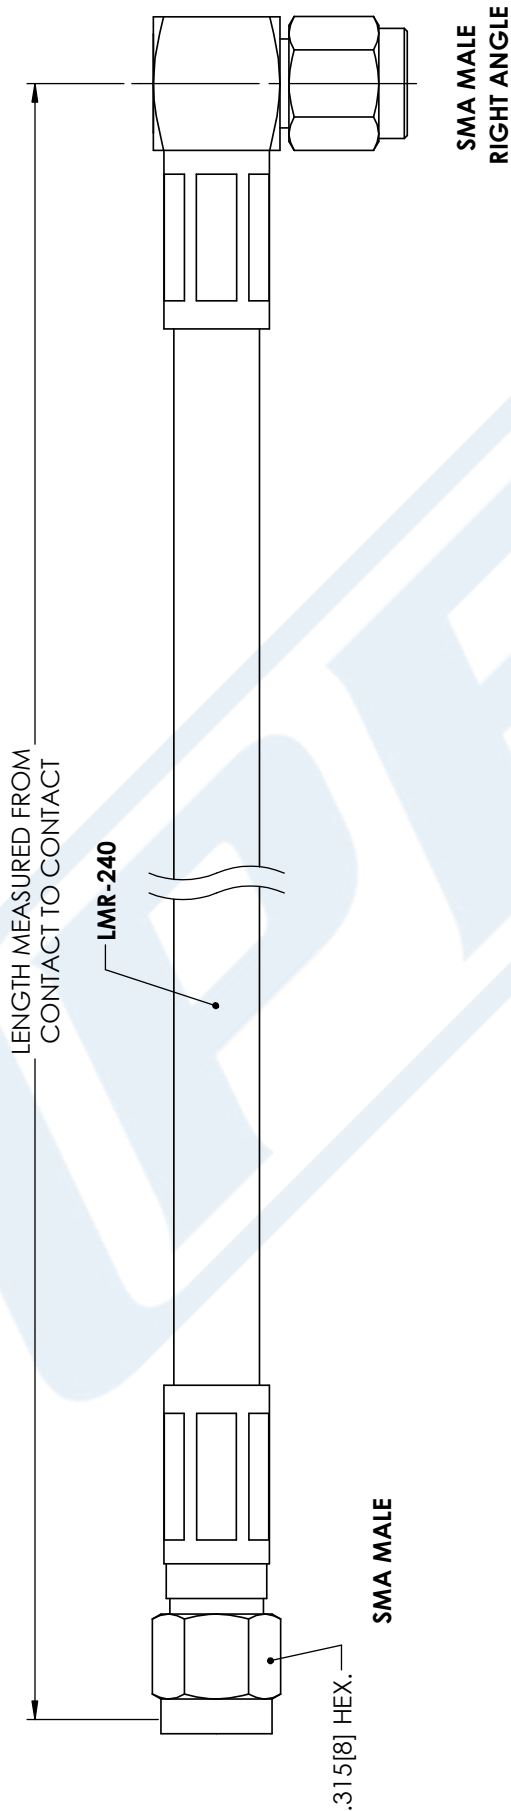

| STANDARD TOLERANCES |
|---------------------|
| .X ±0.2             |
| .XX ±0.01           |
| .XXX ±0.005         |

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

**P****E****P****A****S****T****E****R****N****A****C****K**<sup>®</sup>  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
PE3C0055LF

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 10/15/18

SCALE N/A

SIZE A

CN2245