



## N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax

### TECHNICAL DATA SHEET

PE3C0112-48

#### N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax

##### Configuration

Connector 1	N Male
Connector 2	N Male
Cable Type	LMR-600
Impedance, Ohms	50

##### Mechanical Specifications

###### Cable Assembly

Cable Type	LMR-600
------------	---------

###### Temperature

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85

###### Size

Length, in [cm]	48 [121.92]
Diameter, in [mm]	0.8 [20.32]
Weight, lbs [g]	0.47 [213.19]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	1.5 [38.1]
Repeated Minimum Bend Radius, in [mm]	6 [152.4]

###### Cable

No of Shields	2
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.59 [14.99]

###### Connector 1

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	50µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal
Coupling Nut Plating Specification	100µ in. minimum
Hex Size, mm	20.57
Torque, in-lbs [Nm]	44 [4.97]
Body Material and Plating	Brass, Tri-Metal
Body Plating Specification	100µ in. minimum
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax PE3C0112-48](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax

### TECHNICAL DATA SHEET

PE3C0112-48

#### Connector 2

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	50μ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal
Coupling Nut Plating Specification	100μ in. minimum
Hex Size, mm	20.57
Torque, in-lbs [Nm]	44 [4.97]
Body Material and Plating	Brass, Tri-Metal
Body Plating Specification	100μ in. minimum
Dielectric Type	PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

#### Plotted and Other Data

Notes:

Values at 25 °C, sea level

N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax PE3C0112-48](http://www.pasternack.com/n-male-n-male-lmr600-cable-assembly-pe3c0112-48-p.aspx)

URL: <http://www.pasternack.com/n-male-n-male-lmr600-cable-assembly-pe3c0112-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE3C0112-48 CAD Drawing

N Male to N Male With Times Connectors Cable 48 Inch Length Using LMR-600 Coax

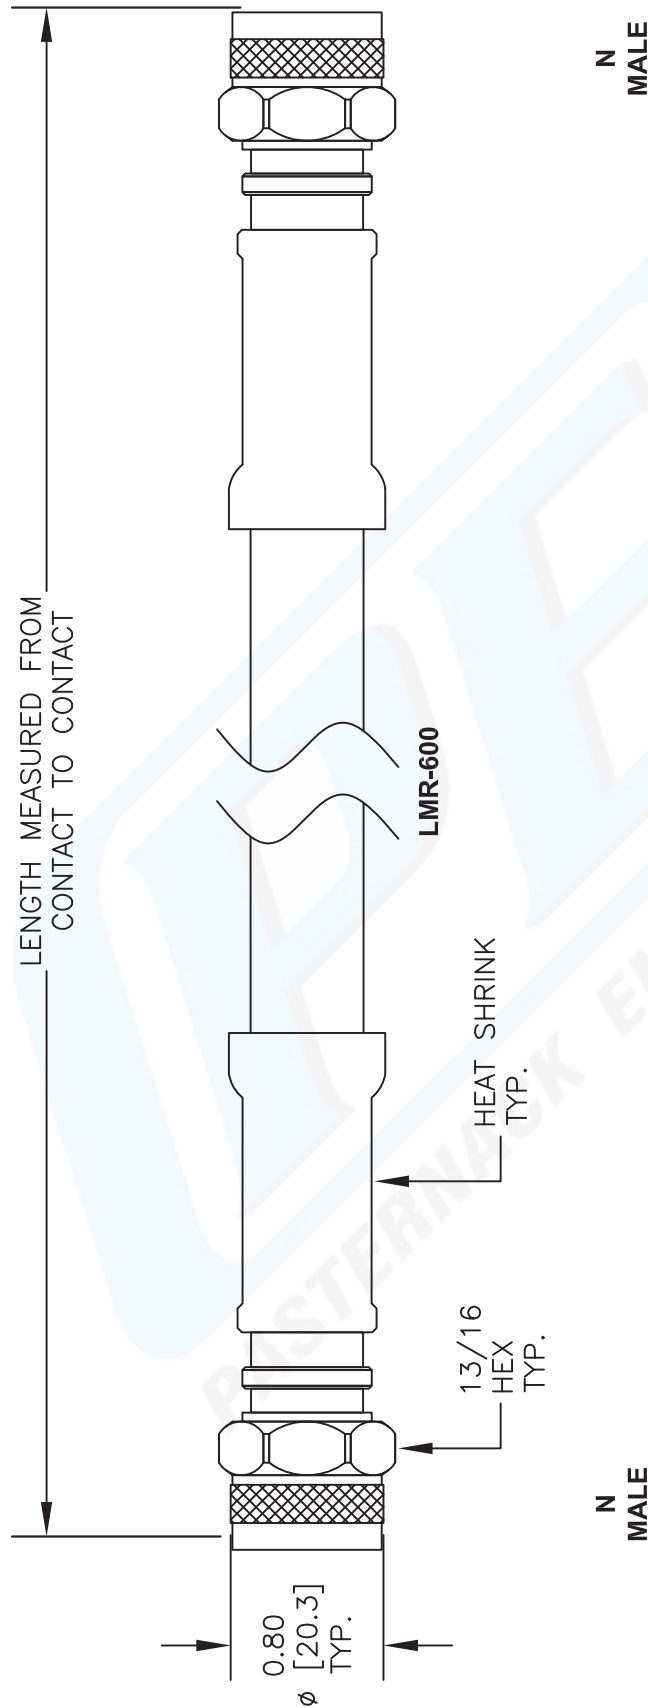

How To Order					
<div>Part Number Configuration</div> <div>PE3   <div>zzz</div>   <div>yy</div>   -   <div>xx</div>   <div>uu</div></div> <div>00 - 99999</div> <div>LF = RoHS Compliant</div> <div>&lt; Blank &gt; = Standard</div> <div>Note: LF applies only to RF cables</div>	<div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div>				
		-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-xx	Custom Length	-xxCM	Custom Length

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE3C0112**

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 022613

SCALE N/A

SIZE A

2233