



SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1173-200CM

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: TNC Female Bulkhead
- Cable Type: PE-P142LL

Features

- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR < 1.45:1 to 18 GHz
- Minimum Bend Radius of 1 inch
- Operating Temperature range of -55 to +125°C
- ROHS and REACH Compliant
- Same day shipment of custom lengths
- 100% Continuity, Hi-Pot, and RF tested



Description

The PE3C1173 series high performance test cable's 0.195 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All PE3C1173 cable assemblies are 100% Continuity, Hi-POT, and RF tested to published specifications. Custom lengths are built to order and shipped same day.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|------------|---------|--------------|
| Frequency Range | DC | | 18 | GHz |
| VSWR | | | 1.45:1 | |
| Return Loss | 14.72 | | | dB |
| Velocity of Propagation | | 83 | | % |
| RF Shielding | 95 | | | dB |
| Capacitance | | 25 [82.02] | | pF/ft [pF/m] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS PE3C1173-200CM](#)



SMA Male Right Angle to TNC Female Bulkhead Low Loss
Cable 200 cm Length Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1173-200CM

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 1 | 2 | 4.5 | 9 | 18 | GHz |
| Insertion Loss (Max.) | 1.1 | 1.3 | 1.7 | 2.3 | 3 | dB |
| Insertion Loss (Typ.) | 0.88 | 1.07 | 1.46 | 1.92 | 2.57 | dB |

Mechanical Specifications

Cable Assembly

| | |
|----------|---------------------|
| Length | 78.74 in [200 cm] |
| Diameter | 0.63 in [16 mm] |
| Weight | 0.44 lbs [199.58 g] |

Cable

| | |
|--------------------------------------|---------------------------|
| Cable Type | PE-P142LL |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 3 |
| Shield Layer 1 | Silver Plated Copper Tape |
| Shield Layer 2 | Aluminum Polyester |
| Shield Layer 3 | Silver Plated Copper Wire |
| Jacket Material | FEP, Green |
| Jacket Diameter | 0.195 in [4.95 mm] |
| One Time Minimum Bend Radius | 1 in [25.4 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS PE3C1173-200CM](#)



SMA Male Right Angle to TNC Female Bulkhead Low Loss
Cable 200 cm Length Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1173-200CM

Connectors

| Description | Connector 1 | Connector 2 |
|---------------------------------------|----------------------------|----------------------------|
| Type | SMA Male Right Angle | TNC Female Bulkhead |
| Specification | MIL-PRF-39012 | MIL-STD-348 |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Contact Plating Specification | ASTM-B488, 50µ In. Minimum | ASTM-B488, 50µ In. Minimum |
| Dielectric Type | PTFE | PEI |
| Outer Conductor Material and Plating | Passivated Stainless Steel | Passivated Stainless Steel |
| Outer Conductor Plating Specification | SAE-AMS-2700 | SAE-AMS-2700 |
| Coupling Nut Material and Plating | Passivated Stainless Steel | |
| Coupling Nut Plating Specification | SAE-AMS-2700 | |
| Hex Size | 5/16 Inch | |
| Torque | 8 in-lbs [0.9 Nm] | |
| Body Material and Plating | Passivated Stainless Steel | Passivated Stainless Steel |
| Body Plating Specification | SAE-AMS-2700 | SAE-AMS-2700 |

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes
REACH Compliant 12/17/2015

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS PE3C1173-200CM](#)



SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1173-200CM

How to Order

Part Number Configuration:

PE3C1173

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C1173-12 = 12 inches long cable
PE3C1173-100cm = 100 cm long cable

SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Low Loss Cable 200 cm Length Using PE-P142LL Coax, RoHS PE3C1173-200CM](https://www.pasternack.com/sma-male-tnc-female-pe-p142ll-cable-assembly-pe3c1173-200cm-p.aspx)

URL: <https://www.pasternack.com/sma-male-tnc-female-pe-p142ll-cable-assembly-pe3c1173-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C1173-200CM CAD Drawing

SMA Male Right Angle to TNC Female Bulkhead Low Loss
Cable 200 cm Length Using PE-P142LL Coax, RoHS

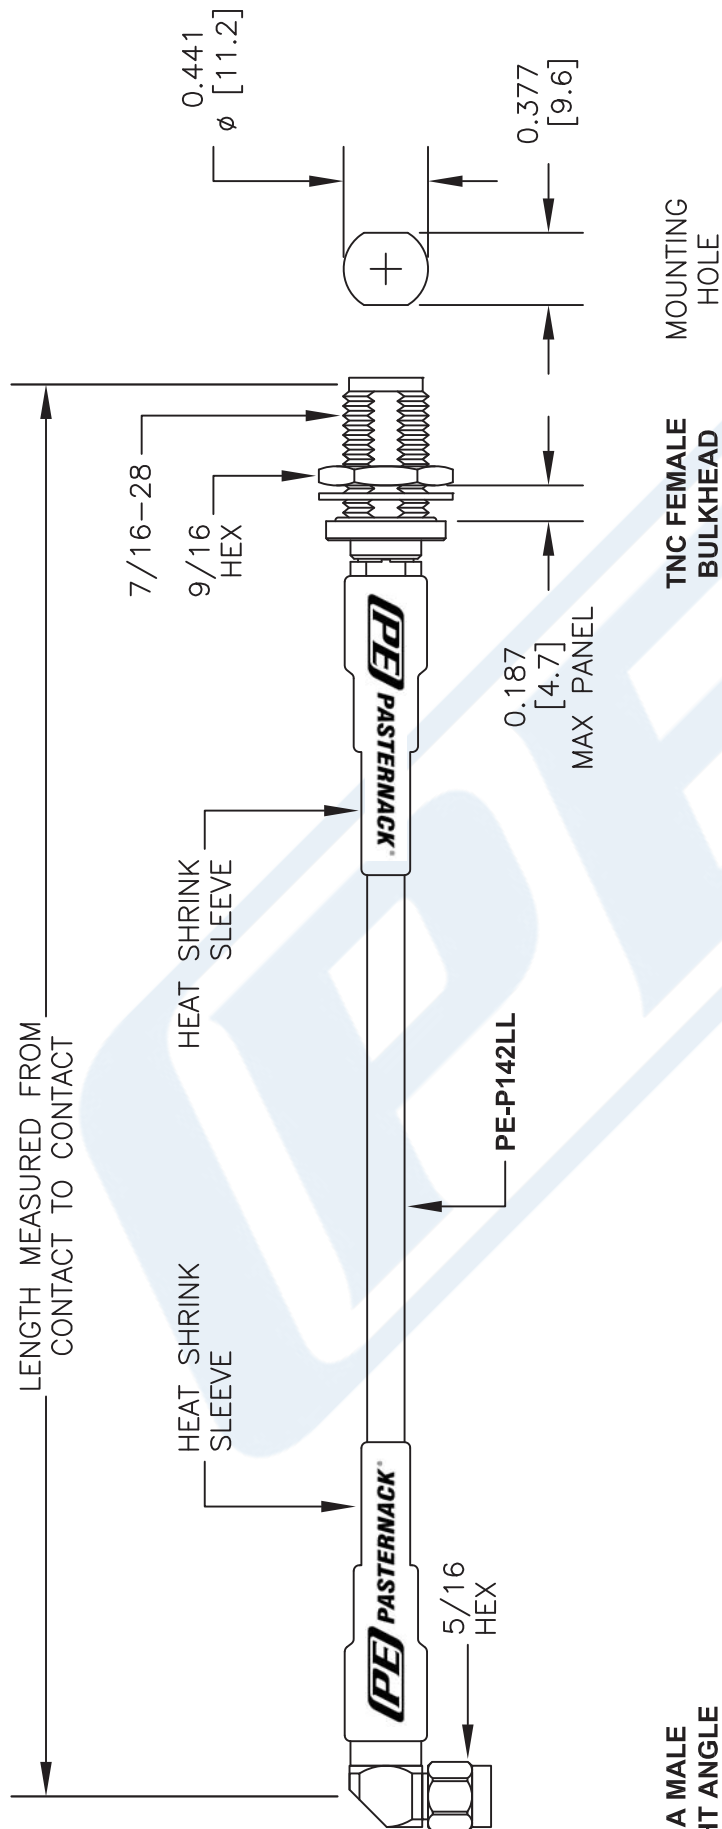

**SMA MALE
RIGHT ANGLE**

**TNC FEMALE
BULKHEAD**

**MOUNTING
HOLE**

| How To Order | | | | | |
|---|--|---|------------------|-------------|-----------------------|
| <div>Part Number Configuration</div> <div>PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div></div> <div>00 - 99999</div> <div>LF = RoHS Compliant</div> <div>< Blank > = Standard</div> <div>Note: LF applies only to RF cables</div> | | <div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div> <div>CM = Centimeters</div> <div>< Blank > = Inches</div> <div>Length</div> | | | |
| | | Part # Ext. | Length In Inches | Part # Ext. | Length In Centimeters |
| | | -12 | 12" | -25CM | 25Cm |
| | | -24 | 24" | -50CM | 50Cm |
| | | -36 | 36" | -75CM | 75Cm |
| | | -48 | 48" | -100CM | 100Cm |
| | | -60 | 60" | -125CM | 125Cm |
| | | -xx | Custom Length | -xxCM | Custom Length |

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE3C1173

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

FSCM NO. 53919

CAD FILE 082214

SCALE N/A

SIZE A

2233