



BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3C2416-60

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: RG316

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 3 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 69 | | % |
| Capacitance | | 29.4 [96.46] | | pF/ft [pF/m] |
| DC Resistance Inner Conductor | | 8.41 [27.59] | | Ω/1000ft [Ω/Km] |
| Operating Voltage (AC) | | | 335 | Vrms |
| Jacket Spark | | | 2,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|-------|-----|-----|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 3 | GHz |
| Insertion Loss (Typ.) | 0.75 | 1 | 1.392 | 2.1 | 3.1 | dB |

Mechanical Specifications**Cable Assembly**

| | |
|----------|--------------------|
| Length* | 60 in [152.4 cm] |
| Diameter | 0.57 in [14.48 mm] |
| Weight | 0.12 lbs [54.43 g] |

Cable

| | |
|--------------------------------------|---------------------------|
| Cable Type | RG316 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Stranded |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 1 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax PE3C2416-60](#)



BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3C2416-60

Shield Layer 1
Jacket Material
Jacket Diameter

Silver Plated Copper Braid
FEP, Tan
0.102 in [2.59 mm]

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|------------------|------------------|
| Type | BNC Male | BNC Male |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 50µ in. minimum | 50µ in. minimum |
| Dielectric Type | Teflon | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum | 100µ in. minimum |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Nickel |
| Coupling Nut Plating Specification | 100µ in. minimum | 100µ in. minimum |
| Seal Gasket Material | Silicone Rubber | Silicone Rubber |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax PE3C2416-60](#)



BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3C2416-60

How to Order

Part Number Configuration:

PE3C2416

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C2416-12 = 12 inches long cable
PE3C2416-100cm = 100 cm long cable

BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax PE3C2416-60](https://www.pasternack.com/bnc-male-bnc-male-rg316u-cable-assembly-pe3c2416-60-p.aspx)

URL: <https://www.pasternack.com/bnc-male-bnc-male-rg316u-cable-assembly-pe3c2416-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2416-60 CAD Drawing

BNC Male to BNC Male Cable 60 Inch Length Using RG316 Coax

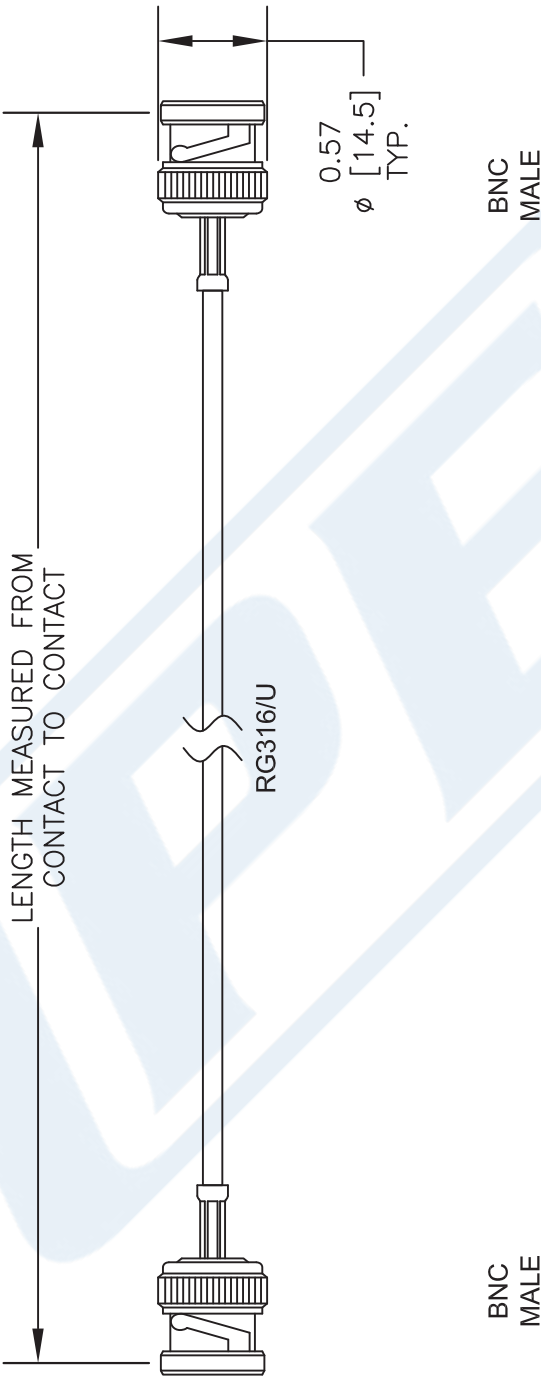

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

| | | | |
|-----------|----------|--------|------|
| DWG TITLE | PE3C2416 | | |
| | FSCM NO. | 53919 | |
| | CAD FILE | 080316 | |
| | SCALE | N/A | |
| | SIZE | A | 2233 |

PE

PASTERNAK®

THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com