



## N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3286-36

#### Configuration

- Connector 1: N Male
- Connector 2: N Female Bulkhead
- Cable Type: RG402

#### Features

- Max Frequency 8 GHz

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C3286-36 type N male to type N female bulkhead 36 inch cable using RG402 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack type N to type N cable assembly has a male to female gender configuration with 50 ohm semi-rigid RG402 coax. The PE3C3286-36 type N male to type N female cable assembly operates to 8 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.5:1	
Capacitance		29.9 [98.1]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4	8		GHz
Insertion Loss (Max.)	0.56	0.67	0.89	1.33		dB

#### Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax PE3C3286-36](#)



## N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3286-36

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector loss.

#### Mechanical Specifications

##### Cable Assembly

Length\* 36 in [914.4 mm]  
Diameter 0.866 in [22 mm]

##### Cable

Cable Type RG402  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Copper

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Female Bulkhead
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	30μ in. minimum	
Dielectric Type	Teflon	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	30μ in. minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in. minimum	

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax PE3C3286-36](#)




N Male to N Female Bulkhead Cable 36 Inch  
Length Using RG402 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3286-36

Typical Performance Data

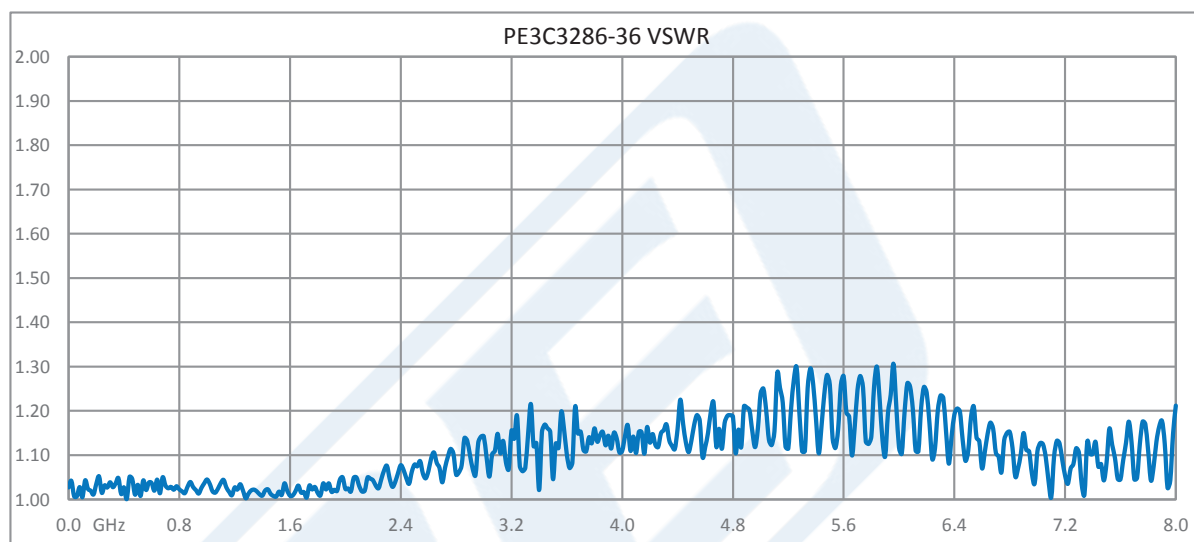

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax PE3C3286-36](#)



## N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3286-36

#### How to Order

Part Number Configuration:

**PE3C3286**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3286-12 = 12 inches long cable  
PE3C3286-100cm = 100 cm long cable

N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax PE3C3286-36](#)

URL: <https://www.pasternack.com/n-male-n-female-rg402u-cable-assembly-pe3c3286-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3286-36 CAD Drawing

N Male to N Female Bulkhead Cable 36 Inch Length Using RG402 Coax

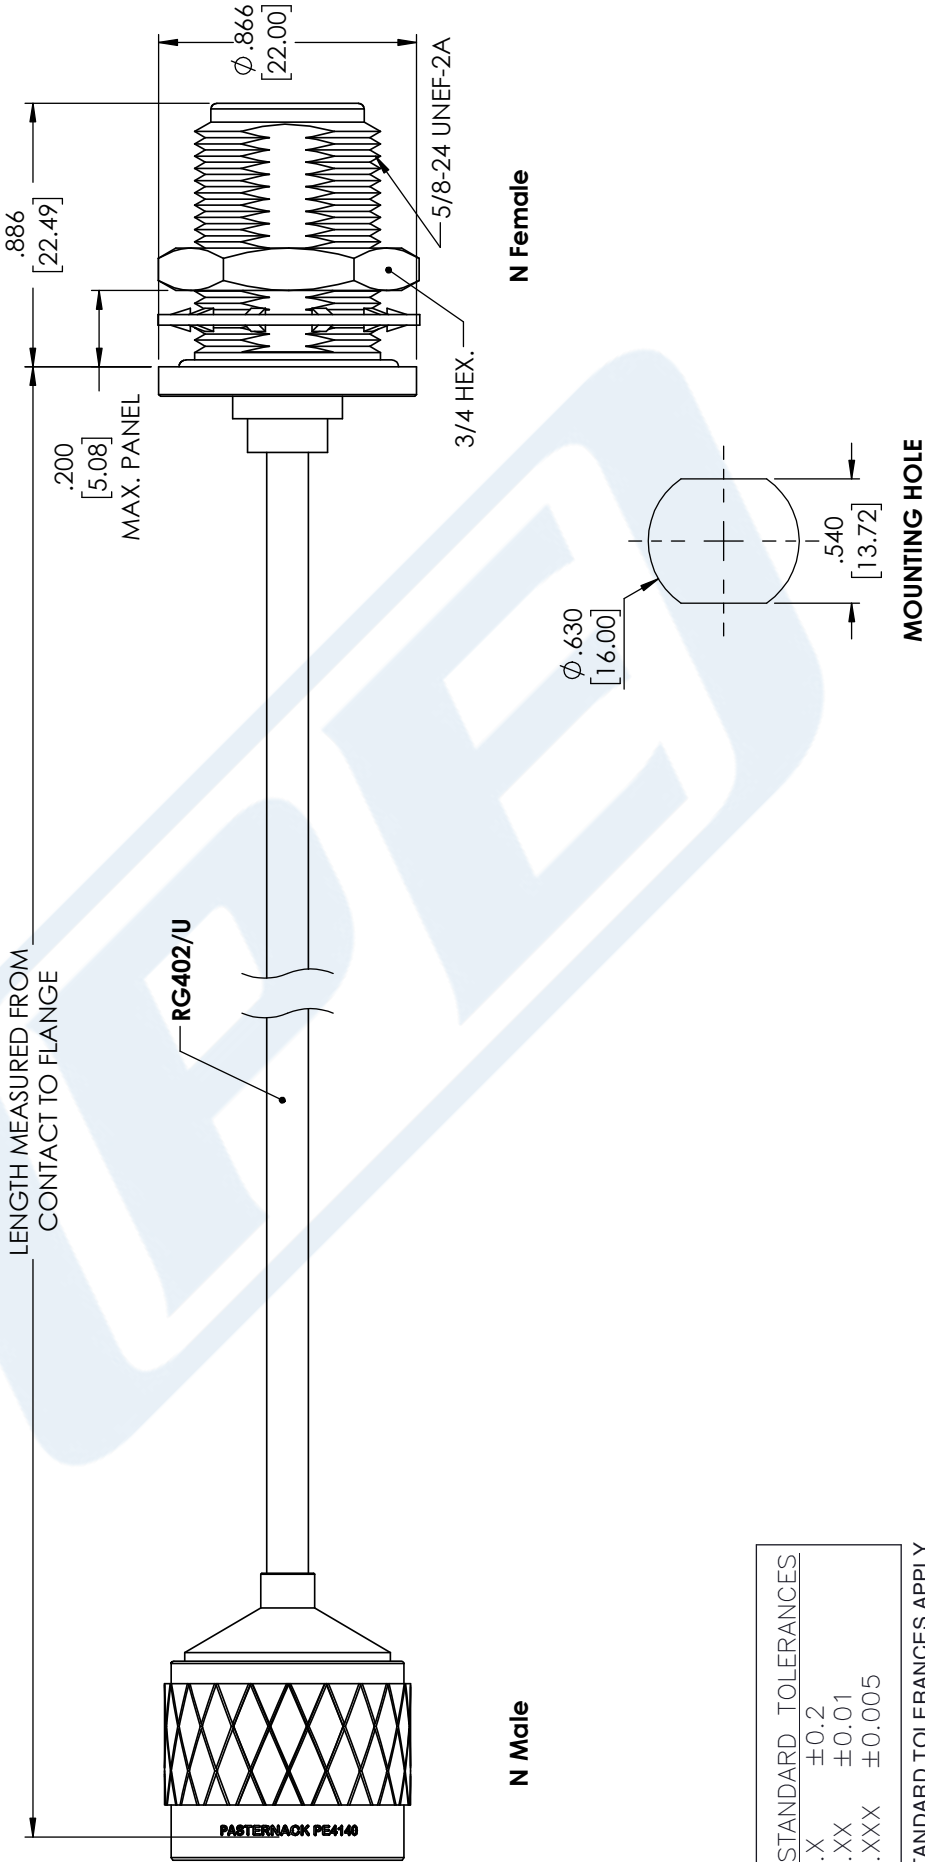

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE3C3286
CAGE CODE	53919



**PASTERNAK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

CAD FILE	09/28/18	SCALE	N/A	SIZE	A	CN2245
----------	----------	-------	-----	------	---	--------