



BNC Male to BNC Female Low Frequency Low Loss Cable 24 Inch Length Using PE-SF200LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC1101-24

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Female
- Cable Type: PE-SF200LL

Features

- Durable BNC Male and BNC Female options
- 1.35:1 VSWR to 3 GHz
- 76% velocity of propagation (VoP) low loss coax
- 100% VSWR tested and Hi-Pot tested to 500 volts
- Very flexible and durable
- Enhanced strain relief, heavy duty booting
- In-stock and ready to ship

Applications

- Production testing up to 3 GHz
- RF development testing
- General lab testing
- Test rack applications

Description

Pasternack's new line of BNC test cables built on our PE-SF200LL coax are optimized for use up to 3 GHz. The highly flexible low loss coax design improves the usability of the test cables reducing the strain applied to your test components while making it easier to route the cables in your test setup or equipment rack. The flexible coax cable has excellent electrical properties including low insertion loss and >100 dB of shielding effectivity. These 3 GHz test cables are available with Male and Female BNC connector options and are stocked in standard lengths and available for same day shipment.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.35:1	
Velocity of Propagation		76		%
RF Shielding	90			dB
Group Delay		1.34 [4.4]		ns/ft [ns/m]
Capacitance		26.7 [87.6]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms
Input Power (Peak)			3	KWatts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Low Frequency Low Loss Cable 24 Inch Length Using PE-SF200LL Coax, RoHS PE3TC1101-24](#)



BNC Male to BNC Female Low Frequency Low Loss Cable 24 Inch Length Using PE-SF200LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC1101-24

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.24	0.38	0.54	0.76	1.32	dB
Power Handling (Max.)	450	300	200	150	80	Watts

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Cable Assembly

Length 24 in [609.6 mm]

Weight 0.14 lbs [63.5 g]

Cable

Cable Type PE-SF200LL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper, Bare
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Aluminum Tape
 Shield Layer 2 Tinned Copper
 Jacket Material PVC
 Jacket Diameter 0.185 in [4.7 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Body Material and Plating	Brass, Nickel	Brass, Nickel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Low Frequency Low Loss Cable 24 Inch Length Using PE-SF200LL Coax, RoHS PE3TC1101-24](#)



BNC Male to BNC Female Low Frequency Low Loss
Cable 24 Inch Length Using PE-SF200LL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC1101-24

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

How to Order

Part Number Configuration:

PE3TC1101

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3TC1101-12 = 12 inches long cable
PE3TC1101-100cm = 100 cm long cable

BNC Male to BNC Female Low Frequency Low Loss Cable 24 Inch Length Using PE-SF200LL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Low Frequency Low Loss Cable 24 Inch Length Using PE-SF200LL Coax, RoHS PE3TC1101-24](http://www.pasternack.com/bnc-male-bnc-female-pe-sf200ll-cable-assembly-pe3tc1101-24-p.aspx)

URL: <http://www.pasternack.com/bnc-male-bnc-female-pe-sf200ll-cable-assembly-pe3tc1101-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3TC1101-24 CAD Drawing

BNC Male to BNC Female Low Frequency Low Loss Cable
24 Inch Length Using PE-SF200LL Coax, RoHS

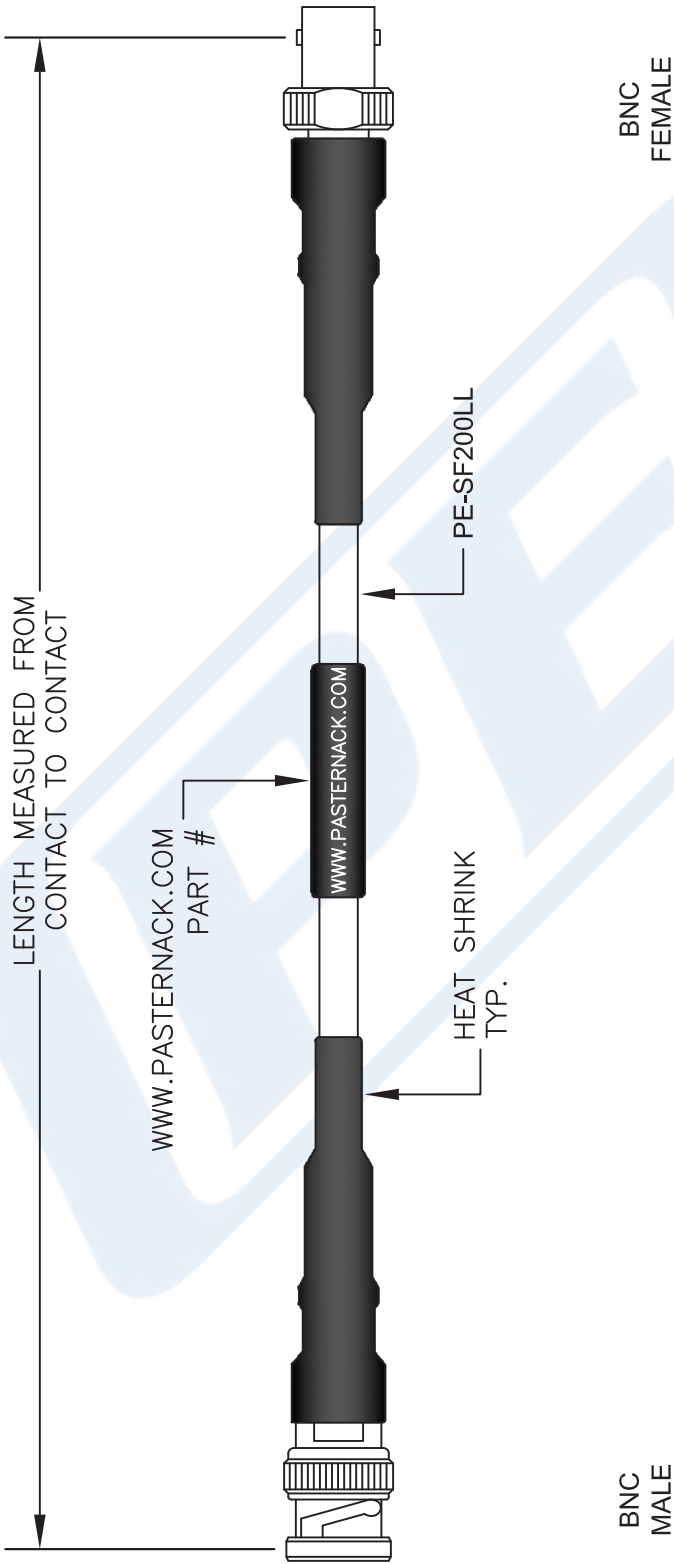

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - 3. DIMENSIONS ARE IN INCHES [mm].
 - 4. LENGTH TOLERANCE IS $\pm 2\%$

DWG TITLE

PE3TC1101

FSCM NO. 53919

CAD FILE 022516

SCALE N/A

SIZE A

2233

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com