



## SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W02270LF/HS-100CM

#### Configuration

- Connector 1: SMA Male
- Connector 2: MCX Plug
- Cable Type: RG316

#### Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket



#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W02270LF/HS-100CM SMA male to MCX plug 100 cm cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to MCX cable assembly has a male to plug gender configuration with 50 ohm flexible RG316 coax. The PE3W02270LF/HS-100CM SMA male to MCX plug cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.41 [27.59]		$\Omega$ /1000ft [ $\Omega$ /Km]
Jacket Spark			2,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder PE3W02270LF/HS-100CM](#)



SMA Male to MCX Plug Cable 100 cm Length Using  
RG316 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W02270LF/HS-100CM

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.55	0.68	0.84	1.16	1.96	dB

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

**Mechanical Specifications**

**Cable Assembly**

Length\* 39.37 in [100 cm]

**Cable**

Cable Type RG316  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Silver Plated Copper Braid  
Jacket Material FEP, Tan  
Jacket Diameter 0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder PE3W02270LF/HS-100CM](#)



SMA Male to MCX Plug Cable 100 cm Length Using  
RG316 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W02270LF/HS-100CM

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	MCX Plug
Specification		CECC 22220
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30μ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification		100μ in. minimum
Coupling Nut Material and Plating	Brass, Gold	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder PE3W02270LF/HS-100CM](#)



## SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W02270LF/HS-100CM

#### How to Order

Part Number Configuration:

**PE3W02270LF/HS - xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W02270LF/HS-12 = 12 inches long cable  
PE3W02270LF/HS-100cm = 100 cm long cable


SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Cable 100 cm Length Using RG316 Coax with HeatShrink, LF Solder PE3W02270LF/HS-100CM](https://www.pasternack.com/sma-male-mcx-plug-rg316u-cable-assembly-pe3w02270lf-hs-100cm-p.aspx)

URL: <https://www.pasternack.com/sma-male-mcx-plug-rg316u-cable-assembly-pe3w02270lf-hs-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W02270LF/HS-100CM CAD Drawing  
SMA Male to MCX Plug Cable 100 cm Length Using  
RG316 Coax with HeatShrink, LF Solder

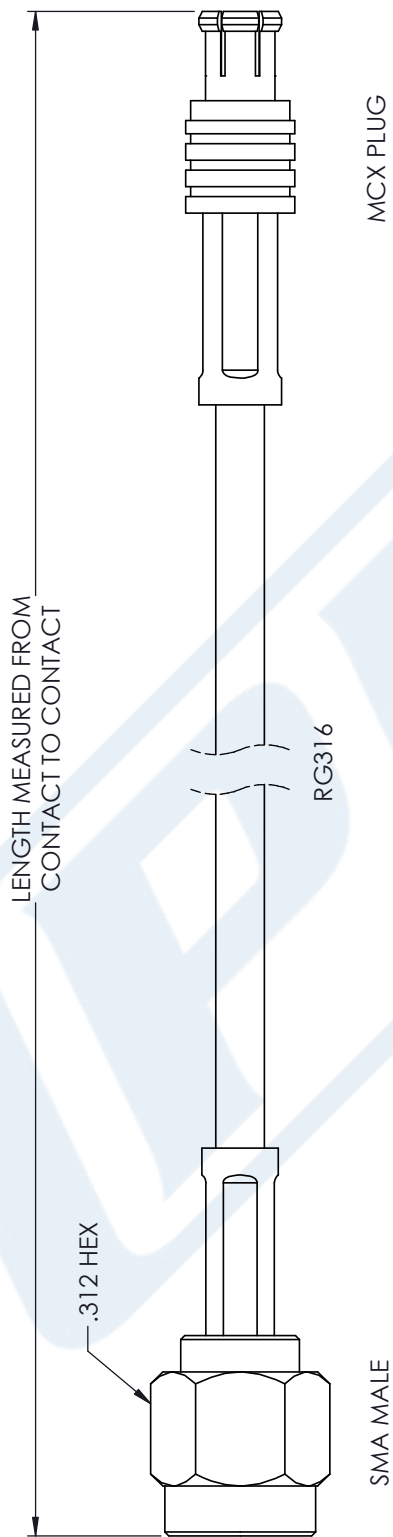

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



**PASTERNAK<sup>®</sup>**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
PE3W02270LF/HS

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 02/08/18

SCALE N/A

SIZE A

GF0006