



3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet


PE3W03922-150CM

Configuration

- Connector 1: 3.5mm Male
- Connector 2: 3.5mm Female
- Cable Type: PE-SR402FL

Features

- Max Frequency 20 GHz
- Shielding Effectivity > 110 dB
- 69.5% Phase Velocity

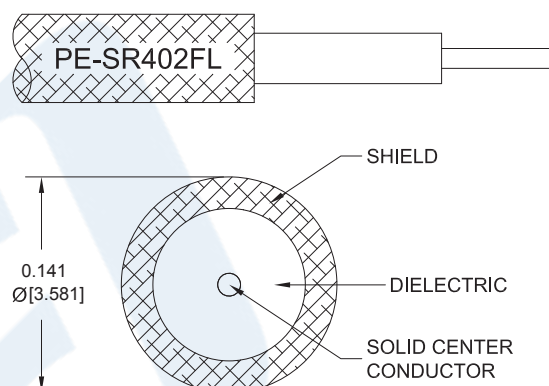

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W03922-150CM 3.5mm male to 3.5mm female 150 cm cable using PE-SR402FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 3.5mm to 3.5mm cable assembly has a male to female gender configuration with 50 ohm formable PE-SR402FL coax. The PE3W03922-150CM 3.5mm male to 3.5mm female cable assembly operates to 20 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		20	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	110			dB
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		7.8 [25.59]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		5.5 [18.04]		Ω/1000ft [Ω/Km]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax PE3W03922-150CM](#)



3.5mm Male to 3.5mm Female Cable 150 CM
Length Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W03922-150CM

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	10	18	20	GHz
Insertion Loss (Max.)	1.1	1.63	2.41	3.4	3.64	dB

Electrical Specification Notes:

The insertion data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector loss.

Mechanical Specifications

Cable Assembly

Length* 59.06 in [150.01 cm]
Diameter 0.351 in [8.92 mm]

Cable

Cable Type PE-SR402FL
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Tinned Copper Braid

Repeated Minimum Bend Radius 0.625 in [15.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax PE3W03922-150CM](#)



3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W03922-150CM

Connectors

Description	Connector 1	Connector 2
Type	3.5mm Male	3.5mm Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PCTFE	PCTFE
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	
Coupling Nut Plating Specification	SAE-AMS-2700	
Hex Size	5/16 inch	
Torque	8 in-lbs [0.9 Nm]	

Mechanical Specification Notes:


*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

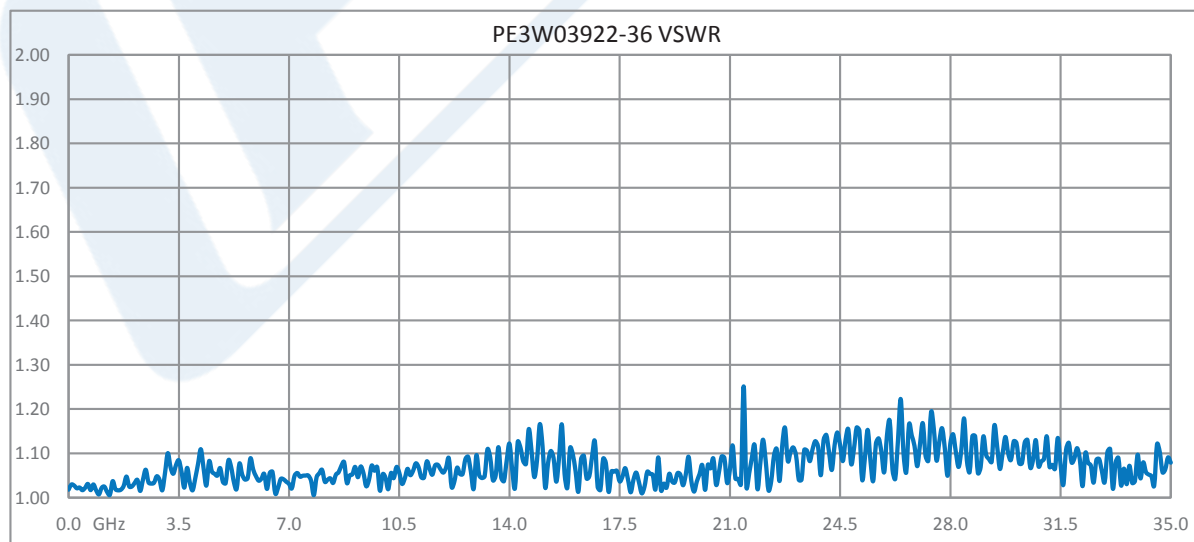

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax PE3W03922-150CM](#)



3.5mm Male to 3.5mm Female Cable 150 CM
Length Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W03922-150CM

How to Order

Part Number Configuration:

PE3W03922

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W03922-12 = 12 inches long cable
PE3W03922-100cm = 100 cm long cable

3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax PE3W03922-150CM](https://www.pasternack.com/3.5mm-male-3.5mm-female-pe-sr402fl-cable-assembly-pe3w03922-150cm-p.aspx)

URL: <https://www.pasternack.com/3.5mm-male-3.5mm-female-pe-sr402fl-cable-assembly-pe3w03922-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W03922-150CM CAD Drawing

3.5mm Male to 3.5mm Female Cable 150 CM Length Using PE-SR402FL Coax

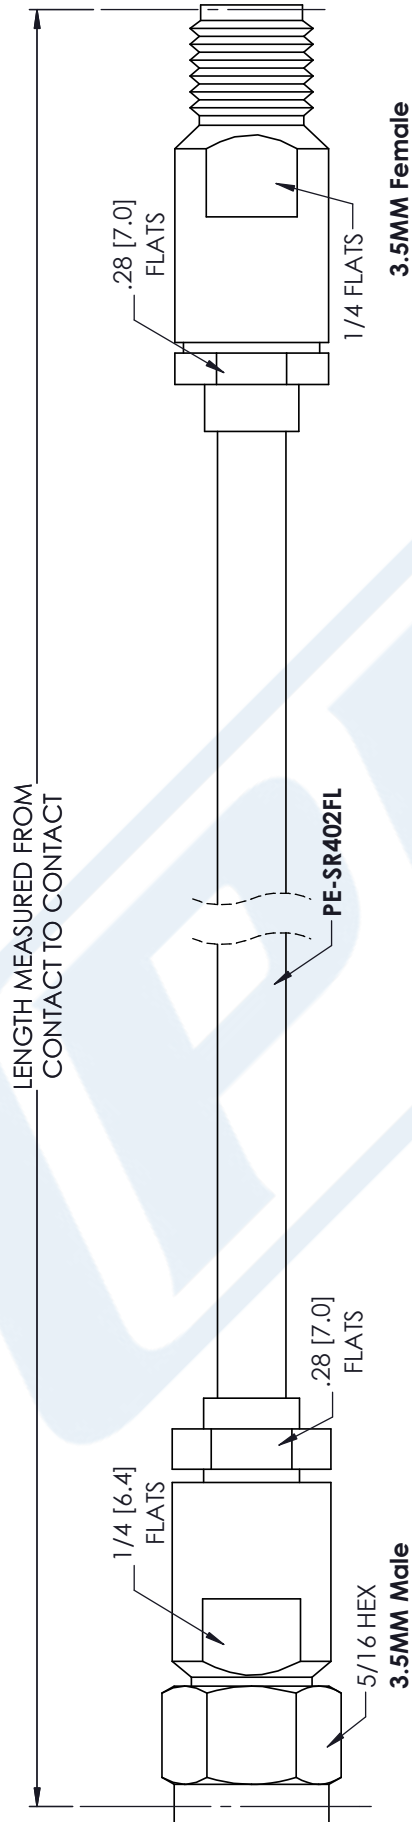

STANDARD TOLERANCES

.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE3W03922

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 09/26/18

SCALE N/A

SIZE A

CN2379