



BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3W07080/HS-50CM

Configuration

- Connector 1: BNC Male
- Connector 2: FAKRA Jack
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

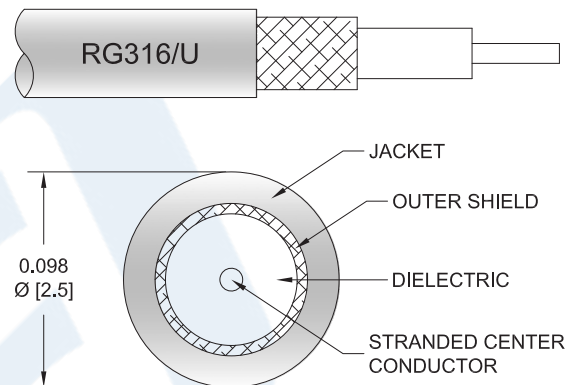

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07080/HS-50CM BNC male to water blue FAKRA jack 50 cm cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to FAKRA cable assembly has a male to jack gender configuration with 50 ohm flexible RG316 coax. The PE3W07080/HS-50CM BNC male to FAKRA jack cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms
Jacket Spark			2,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with Heat-Shrink PE3W07080/HS-50CM](#)



BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W07080/HS-50CM

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	3	GHz
Insertion Loss (Max.)	0.42	0.49	0.83	1.02	1.16	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector Loss

Mechanical Specifications

Cable Assembly

Length* 19.68 in [499.87 mm]
Diameter 0.57 in [14.48 mm]

Cable

Cable Type RG316
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with Heat-Shrink PE3W07080/HS-50CM](#)



BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W07080/HS-50CM

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	FAKRA Jack
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	30 µin minimum	
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Plastic
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with Heat-Shrink PE3W07080/HS-50CM](#)



BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W07080/HS-50CM

How to Order

Part Number Configuration:

PE3W07080/HS - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07080/HS-12 = 12 inches long cable
PE3W07080/HS-100cm = 100 cm long cable

BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Water Blue FAKRA Jack Cable 50 cm Length Using RG316 Coax with HeatShrink PE3W07080/HS-50CM](https://www.pasternack.com/bnc-male-fakra-jack-rg316u-cable-assembly-pe3w07080-hs-50cm-p.aspx)


URL: <https://www.pasternack.com/bnc-male-fakra-jack-rg316u-cable-assembly-pe3w07080-hs-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07080/HS-50CM CAD Drawing

BNC Male to Water Blue FAKRA Jack Cable 50 cm
Length Using RG316 Coax with HeatShrink

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/23/19	S.ELLIS

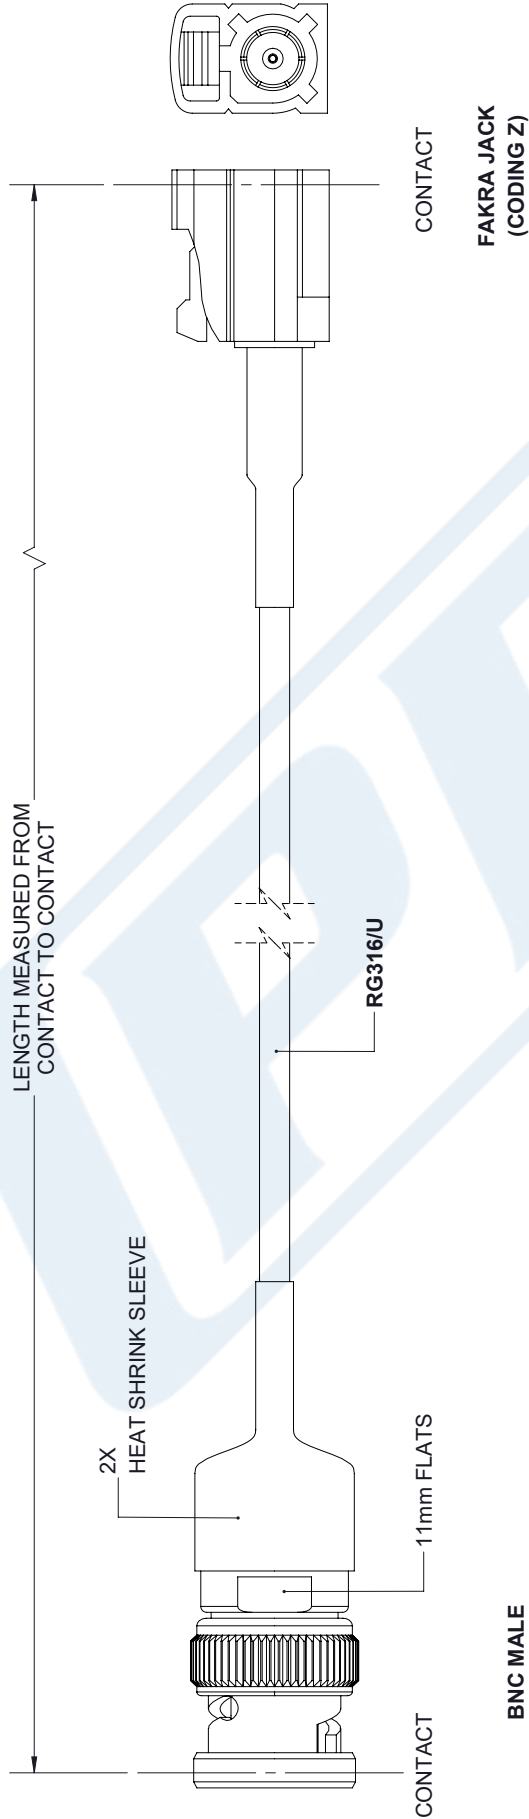

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table style="font-size: small;"> <tr> <td>X±.2</td> <td>[5.08]</td> <td>FRACTIONS</td> </tr> <tr> <td>.XX±.01</td> <td>[.25]</td> <td>±.132</td> </tr> <tr> <td>.XXX±.005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> <p>THIRD-ANGLE PROJECTION</p>	X±.2	[5.08]	FRACTIONS	.XX±.01	[.25]	±.132	.XXX±.005	[.13]	ANGLES ± 1°		<p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.</p> <p>PE PASTERNAK an INFINITO brand</p> <p>Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com</p>									
X±.2	[5.08]	FRACTIONS																		
.XX±.01	[.25]	±.132																		
.XXX±.005	[.13]	ANGLES ± 1°																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SIZE</td> <td>CAGE</td> <td>DRAWN BY</td> <td>PART NUMBER</td> <td>REV</td> </tr> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">53919</td> <td style="text-align: center;">K.DANG</td> <td style="text-align: center;">PE3W07080/HS</td> <td style="text-align: center;">A</td> </tr> </table>	SIZE	CAGE	DRAWN BY	PART NUMBER	REV	A	53919	K.DANG	PE3W07080/HS	A	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SHEET</td> <td>1</td> <td>OF</td> <td>1</td> </tr> <tr> <td>SCALE</td> <td colspan="3" style="text-align: center;">N/A</td> </tr> </table>		SHEET	1	OF	1	SCALE	N/A		
SIZE	CAGE	DRAWN BY	PART NUMBER	REV																
A	53919	K.DANG	PE3W07080/HS	A																
SHEET	1	OF	1																	
SCALE	N/A																			

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.