



## TNC Female Right Angle Connector Solder Attachment Thru Hole PCB, .380 inch x .083 inch Hole Spacing

### RF Connectors Technical Data Sheet

PE44659

#### Configuration

- TNC Female Connector
- MIL-STD-348A
- 50 Ohms
- Right Angle Body Geometry
- Thru Hole Interface Type
- Solder/Solder Attachment

#### Features

- Max. Operating Frequency 11 GHz
- Good VSWR of 1.5:1
- Gold Plated Brass Contact

#### Applications

- General Purpose Test
- PCB Applications

#### Description

Pasternack's PE44659 TNC female right angle connector with solder/solder attachment for thru hole PCB (.380 inch x .083 inch hole spacing) is part of our full line of RF components available for same-day shipping. Our TNC female connector operates up to a maximum frequency of 11 GHz and offers good VSWR of 1.5:1. Its right angle body geometry allows for easier connections in tight spaces.

Our TNC female right angle connector PE44659 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.5:1	
Operating Voltage (AC)			500	Vrms

#### Mechanical Specifications

##### Size

Length	1.22 in [30.99 mm]
Width/Dia.	0.43 in [10.92 mm]
Height	0.709 in [18.01 mm]
Weight	0.031 lbs [14.06 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Right Angle Connector Solder Attachment Thru Hole PCB, .380 inch x .083 inch Hole Spacing PE44659](#)



TNC Female Right Angle Connector Solder Attachment  
Thru Hole PCB, .380 inch x .083 inch Hole Spacing

RF Connectors Technical Data Sheet

PE44659

**Material Specifications**

Description	Material	Plating
Contact	Brass	Gold
Insulation	PTFE	
Body	Brass	Nickel 100 µin minimum

**Environmental Specifications**

**Temperature**

Operating Range

-65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

TNC Female Right Angle Connector Solder Attachment Thru Hole PCB, .380 inch x .083 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Right Angle Connector Solder Attachment Thru Hole PCB, .380 inch x .083 inch Hole Spacing PE44659](#)

URL: <https://www.pasternack.com/tnc-female-standard-thru-hole-pcb-connector-pe44659-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44659 CAD Drawing

TNC Female Right Angle Connector Solder Attachment Thru  
Hole PCB, .380 inch x .083 inch Hole Spacing

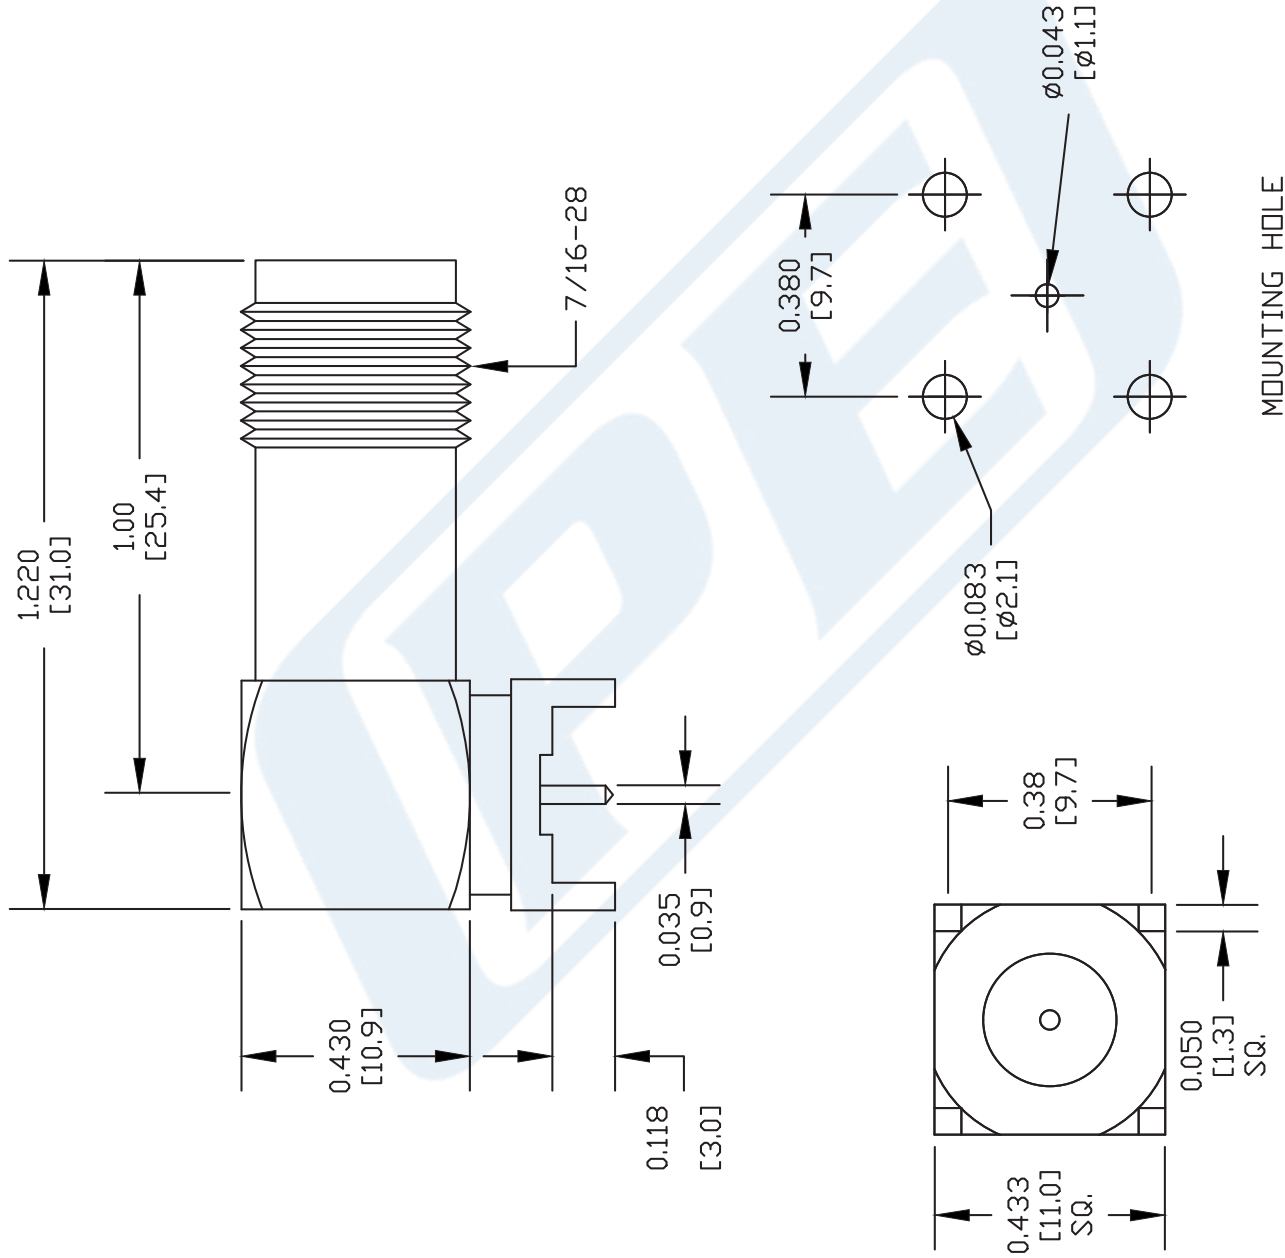

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - 3. DIMENSIONS ARE IN INCHES [mm].
  - 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE44659**

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 011310

SCALE N/A

SIZE A

XXX