



6 dBi DualBand Omni Antenna N Type Connector

Antennas Technical Data Sheet

PE51OM1009

Features

- 2.4/5 GHz IEEE 802.11a/b/g and 802.11ac applications
- Supports 1x2 and 2x2 MIMO AP/Routers
- WiMax, WISP and WiFi applications
- Wireless video systems
- Point-to-multipoint applications

Applications

- MIMO - Multiple-Input and Multiple-Output
- Dual polarity/dual frequency feed system in single enclosure
- Separate inputs horizontal and vertical polarization
- UV-Resistant radome for all-weather operation
- Heavy duty industrial grade design

Description

The HyperLink PE51OM1009 is a professional high gain dual band/dual polarity omnidirectional base station antenna designed and optimized for 2.4 and 5 GHz frequencies. This antenna is ideally suited for multipoint applications where long range and wide coverage is desired.

The PE51OM1009 is actually two antennas in one, a 2.4/5 GHz horizontal polarized antenna and a 2.4/5 GHz vertical polarized antenna together in a single radome. Each polarization features separate dual band feeds, two N-Female connectors in total. This antenna incorporates advanced dual polarization technology that allows for the interoperability of two radio transmit and receive paths. This technology allows for the attenuation of unwanted signals from adjacent channels and/or co-located equipment.

The PE51OM1009 construction features a heavy-duty UV resistant PVCs radome for durability and aesthetics. Designed to operate in the harshest of environments, the PE51OM1009 far exceeds other omnidirectional antennas. The included mounting system features twin heavy-duty mounting clamps and bolts for superior strength.

Configuration

Design	Omni
Band Type	Dual
Radiation Pattern	Omni Directional
Polarization	Vertical/Horizontal
Connector Type	N Female
Interface 2	N Female
Number of Ports	2
Lightning Protection	DC Ground

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Input VSWR			1.6:1	
Impedance		50		Ohms
Gain		6		dBi
Isolation	28			dB
Input Power			100	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE51OM1009](#)



6 dBi DualBand Omni Antenna N Type Connector

Antennas Technical Data Sheet

PE510M1009

Specifications by Band

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	2,400-2,500	5,100-5,800				MHz
Gain	6					dBi
Horizontal Beam Width	360	360				Degees
Vertical Beam Width	25	25				Degees
VSWR Max 1.6:1	1.9:1					
Maximum Input Power	100	100				Watts

Mechanical Specifications

Radome Material

PVC

Size

Overall Length

28.2 in [716.28 mm]

Width

2.9 in [73.66 mm]

Height

2.9 in [73.66 mm]

Mounting Mast Diameter

1.6 to 3.5 in [40.64 to 88.90 mm]

Mechanical Specification Notes:

Radome material is UV resistant PVC.

Environmental Specifications

Temperature

Operating Range

-40 to +60 deg C

Wind Loading

130 MPH [209.21 KPH]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE510M1009](#)



6 dBi DualBand Omni Antenna N Type Connector


Antennas Technical Data Sheet

PE510M1009


Typical Radiation Pattern

RF Antenna Patterns


Horizontal Polarization




H-Plane: 2400 MHz




V-Plane: 2400 MHz




H-Plane: 2450 MHz



V-Plane: 2450 MHz



H-Plane: 2500 MHz



V-Plane: 2500 MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE510M1009](#)




6 dBi DualBand Omni Antenna N Type Connector


Antennas Technical Data Sheet

PE510M1009


Horizontal Polarization




H-Plane: 5100 MHz




V-Plane: 5100 MHz




H-Plane: 5500 MHz



V-Plane: 5500 MHz



H-Plane: 5800 MHz



V-Plane: 5800 MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE510M1009](#)




6 dBi DualBand Omni Antenna N Type Connector


Antennas Technical Data Sheet

PE510M1009


Vertical Polarization




H-Plane: 2400 MHz




V-Plane: 2400 MHz




H-Plane: 2450 MHz



V-Plane: 2450 MHz



H-Plane: 2500 MHz



V-Plane: 2500 MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE510M1009](#)




6 dBi DualBand Omni Antenna N Type Connector


Antennas Technical Data Sheet

PE510M1009


Vertical Polarization




H-Plane: 5100 MHz




V-Plane: 5100 MHz




H-Plane: 5500 MHz



V-Plane: 5500 MHz



H-Plane: 5800 MHz



V-Plane: 5800 MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE510M1009](#)



6 dBi DualBand Omni Antenna N Type Connector

Antennas Technical Data Sheet

PE51OM1009

6 dBi DualBand Omni Antenna N Type Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dBi DualBand Omni Antenna N Type Connector PE51OM1009](https://www.pasternack.com/dual-antenna-6-dbi-gain-n-pe51om1009-p.aspx)

URL: <https://www.pasternack.com/dual-antenna-6-dbi-gain-n-pe51om1009-p.aspx>





The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE51OM1009 CAD Drawing

6 dBi DualBand Omni Antenna N Type Connector

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/13/2020	M.MILLER

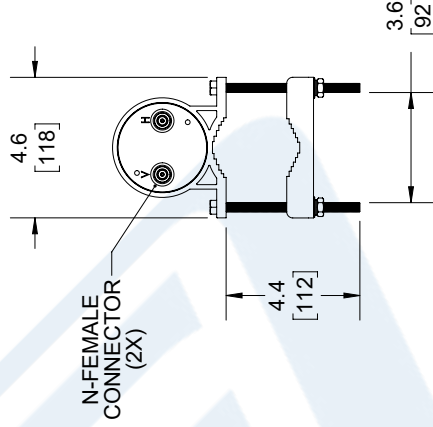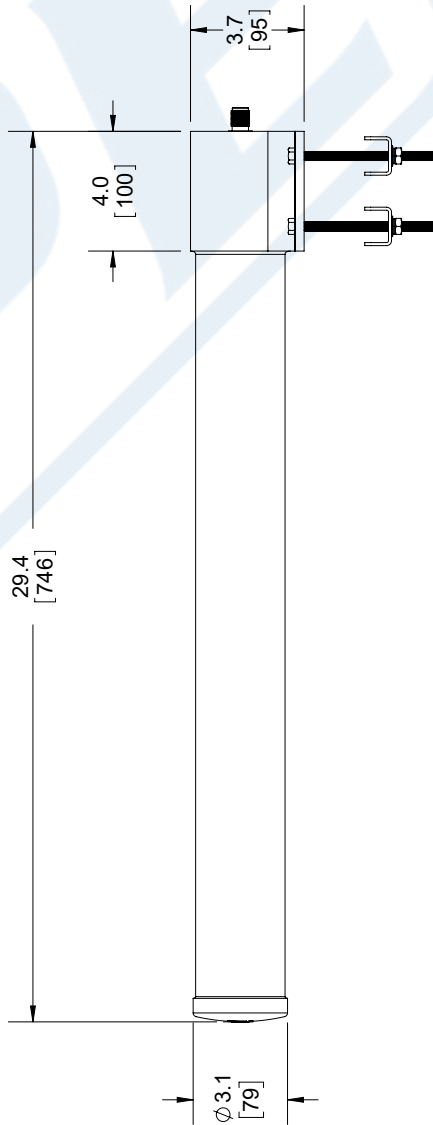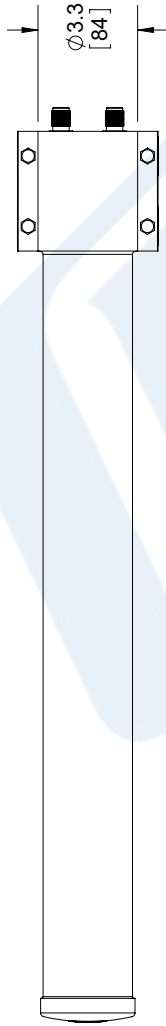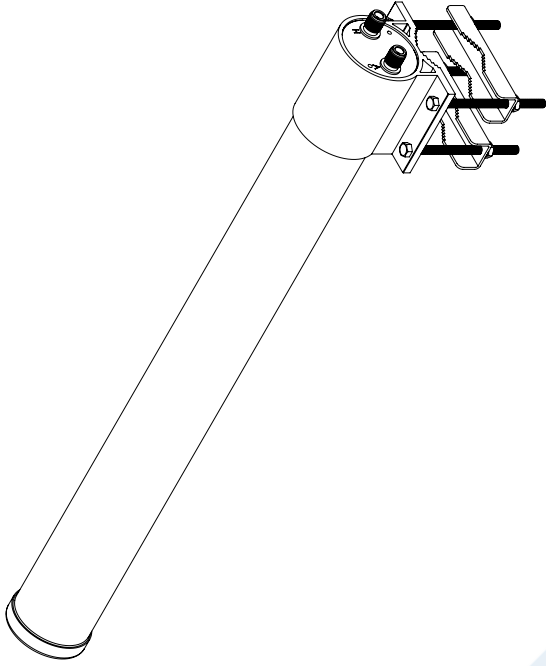

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08]	FRACTIONS
.XX = ±.02 [.51]	± 1/32
.XXX = ±.005 [.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L	= +5% / L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINIT brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE: A CAGE CODE: A DRAWN BY: K.DANG ITEM NO: PE51OM1009

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE: N/A

REV: A

REGULATORY COMPLIANCE:
EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.