



10 dB Fixed Attenuator, 7/16 DIN Male to
7/16 DIN Female Black Anodized Aluminum Heatsink
Body Rated to 10 Watts Up to 7.5 GHz

RF Fixed Attenuators Technical Data Sheet

PE7040-10

Features

- Bidirectional
- DC to 7.5 GHz Frequency Range
- Attenuation 10±0.8 dB
- Max Power 10 Watts (CW)
- VSWR < 1.45:1

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 10 dB Fixed Attenuator PE7040-10 is rated to 10 Watts and operates from DC to 7.5 GHz. The versatile coaxial package uses 7/16 DIN male to 7/16 DIN female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		7.5	GHz
Impedance		50		Ohms
Nominal Attenuation		10		dB
Attenuation Accuracy		±0.8		dB
VSWR			1.45:1	
Input Power, CW derated linearly to 2W at +125°C			10	Watts
Input Power, Peak 5µs pulse, 0.05% duty cycle			500	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 7/16 DIN Male to 7/16 DIN Female Black Anodized Aluminum Heatsink Body Rated to 10 Watts Up to 7.5 GHz PE7040-10](#)



10 dB Fixed Attenuator, 7/16 DIN Male to
7/16 DIN Female Black Anodized Aluminum Heatsink
Body Rated to 10 Watts Up to 7.5 GHz

RF Fixed Attenuators Technical Data Sheet

PE7040-10

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Range	DC to 4	4 to 7.5				GHz
VSWR, Max	1.25:1	1.45:1				

Mechanical Specifications

Size

Length	3.48 in [88.39 mm]
Width/Diameter	1.25 in [31.75 mm]
Weight	0.563 lbs [255.37 g]
Body Material and Plating	Black Anodized Aluminum Heatsink

Configuration

Design	Fixed, Bidirectional
Package Style	Connectorized Module

Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male	7/16 DIN Female
Contact Material and Plating	Beryllium Copper	Beryllium Copper
Hex Size	1 1/4 in.	
Torque	18.417 ft-lbs 24.97 Nm	
Body Material and Plating	Brass	Brass

Environmental Specifications

Temperature

Operating Range	-65 to +125 deg C
-----------------	-------------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 7/16 DIN Male to 7/16 DIN Female Black Anodized Aluminum Heatsink Body Rated to 10 Watts Up to 7.5 GHz PE7040-10](#)



10 dB Fixed Attenuator, 7/16 DIN Male to
7/16 DIN Female Black Anodized Aluminum Heatsink
Body Rated to 10 Watts Up to 7.5 GHz

RF Fixed Attenuators Technical Data Sheet

PE7040-10

10 dB Fixed Attenuator, 7/16 DIN Male to 7/16 DIN Female Black Anodized Aluminum Heatsink Body Rated to 10 Watts Up to 7.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 7/16 DIN Male to 7/16 DIN Female Black Anodized Aluminum Heatsink Body Rated to 10 Watts Up to 7.5 GHz PE7040-10](http://www.pasternack.com/10db-fixed-7-16-male-7-16-female-10-watts-attenuator-pe7040-10-p.aspx)

URL: <http://www.pasternack.com/10db-fixed-7-16-male-7-16-female-10-watts-attenuator-pe7040-10-p.aspx>

PE7040-10 CAD Drawing

10 dB Fixed Attenuator, 7/16 DIN Male to 7/16 DIN Female Black Anodized
Aluminum Heatsink Body Rated to 10 Watts Up to 7.5 GHz

P/N	ATTEN.	FIGURE
PE7040-1	1 dB	1
PE7040-2	2 dB	1
PE7040-3	3 dB	1
PE7040-6	6 dB	1
PE7040-10	10 dB	1
PE7040-20	20 dB	1
PE7040-30	30 dB	2
PE7040-40	40 dB	2

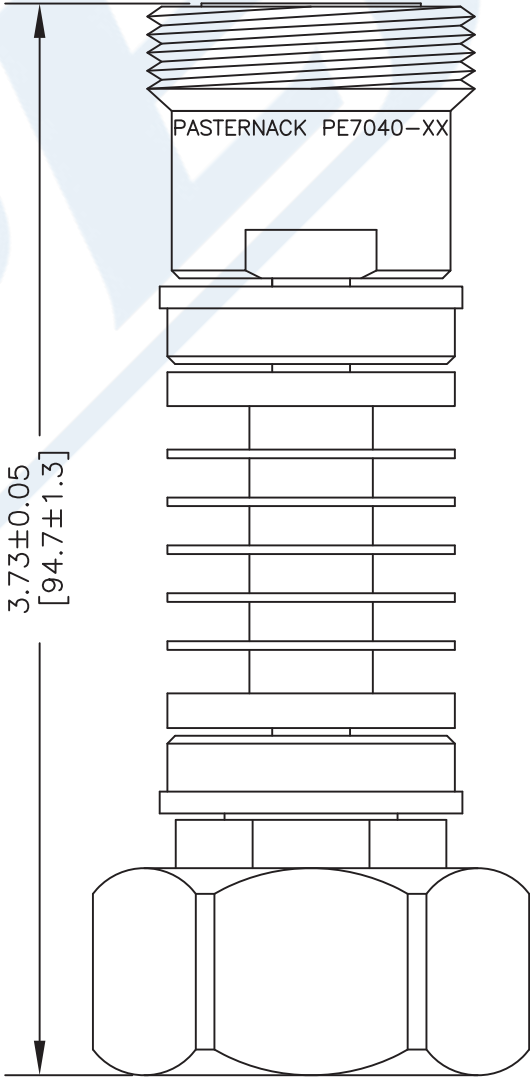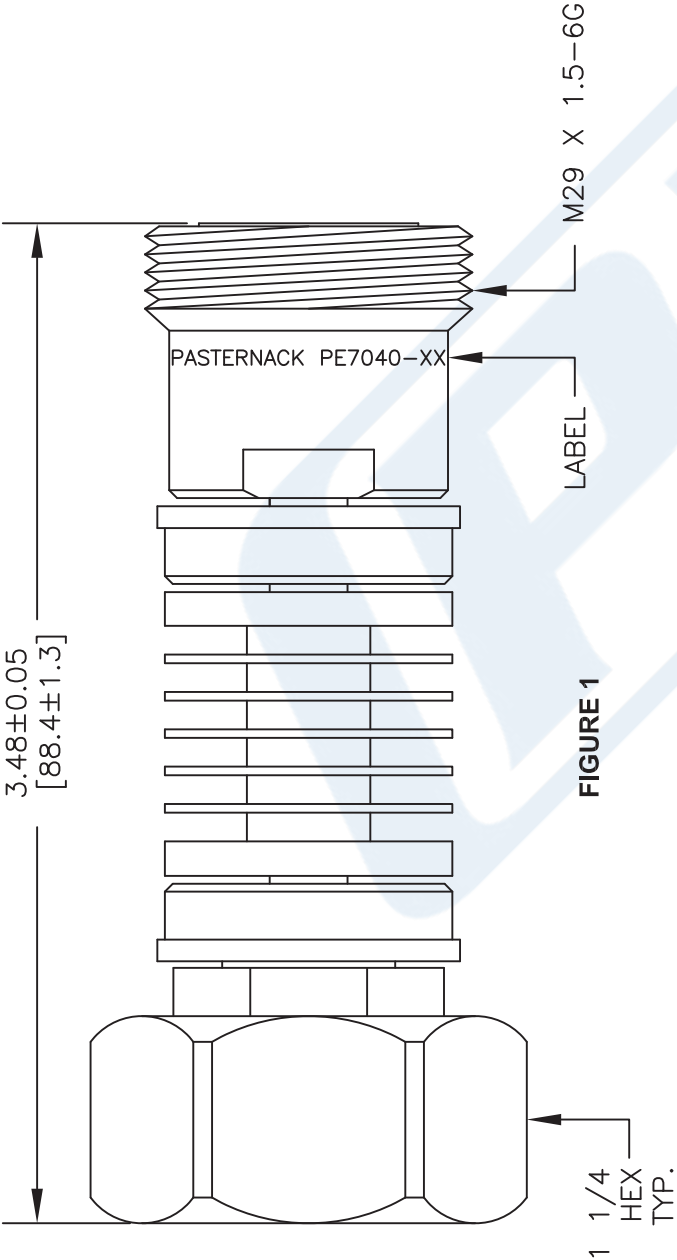

7/16 DIN FEMALE

FIGURE 2

7/16 DIN MALE

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE7040

FSCM NO. 53919

3045

SIZE A

SCALE N/A

CAD FILE 022616

P**E** **PASTERNAK**[®]
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com