



**60 dB Fixed Attenuator, 7/16 DIN Female To TNC Male  
Directional Rated To 100 Watts Up To 6 GHz**

**TECHNICAL DATA SHEET**

**PE7231-60**

**60 dB Fixed Attenuator, 7/16 DIN Female To TNC Male Directional Rated To 100 Watts Up To 6 GHz**

Pasternack Enterprises line of 100W Attenuators operate from DC to 6 GHz, and are available in 42 different 7/16 DIN, N, SMA and TNC in-series and between-series connector combinations. Our 100W Attenuators are manufactured with Passivated Stainless Steel SMA, TNC and N connectors, and Silver Plated Brass 7/16 DIN connectors. Pasternack 100W Attenuators come in 3 dB, 6 dB, 10 dB, 20 dB, 30 dB, 40 dB, 60 dB values and will operate from -55 to +125 degrees C. Additional connector combinations are available beyond the 42 standard designs, upon request.

- 100W average power and 2,000W peak power handling capability
- Operate to 6 GHz
- Temperature range of -55 to +125 degrees C
- 42 in-series and between series combinations
- 7/16 DIN, SMA, N, TNC Male and Female connectors are available
- Other connector combinations available upon request

**Configuration**

Design	Fixed, Directional Attenuator
Connector 1	7/16 DIN Female
Connector 2	TNC Male
Body Material and Plating	Aluminum Heatsink, Black Anodized

**Electrical Specifications**

Frequency Range, GHz	DC to 6
Impedance, Ohms	50
Attenuation Value, dB	60
Maximum Input Power, Watts	100
Maximum VSWR	1.45:1

**Frequency 1**

Range, GHz	DC to 2
VSWR	1.2:1
Attenuation Accuracy, dB	± 1.5

**Frequency 2**

Range, GHz	2 to 4
VSWR	1.35:1
Attenuation Accuracy, dB	± 2

**Frequency 3**

Range, GHz	4 to 6
VSWR	1.45:1
Attenuation Accuracy, dB	± 2.5

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-55 to +125
------------------------	-------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [60 dB Fixed Attenuator, 7/16 DIN Female To TNC Male Directional Rated To 100 Watts Up To 6 GHz PE7231-60](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

60 dB Fixed Attenuator, 7/16 DIN Female To TNC Male  
Directional Rated To 100 Watts Up To 6 GHz



TECHNICAL DATA SHEET

PE7231-60

**Size**

Length, in [mm]	4.9 [124.46]
Width, in [mm]	3.8 [96.52]
Height, in [mm]	2.7 [68.58]
Weight, lbs [Kg]	3 [1.36]

**Connector 1**

Type	7/16 DIN Female
Contact Material and Plating	Brass, Silver
Body Material and Plating	Brass, Silver

**Connector 2**

Type	TNC Male
Contact Material and Plating	Beryllium Copper, Gold
Coupling Nut Material and Plating	Stainless Steel, Passivated
Body Material and Plating	Stainless Steel, Passivated

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

**Plotted and Other Data**

Notes:	Values at 25 °C, sea level
--------	----------------------------

URL: <http://www.pasternack.com/60db-fixed-7-16-female-tnc-male-100-watts-attenuator-pe7231-60-p.aspx>


60 dB Fixed Attenuator, 7/16 DIN Female To TNC Male Directional Rated To 100 Watts Up To 6 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7231-60 CAD Drawing

60 dB Fixed Attenuator, 7/16 DIN Female To TNC Male

Directional Rated To 100 Watts Up To 6 GHz

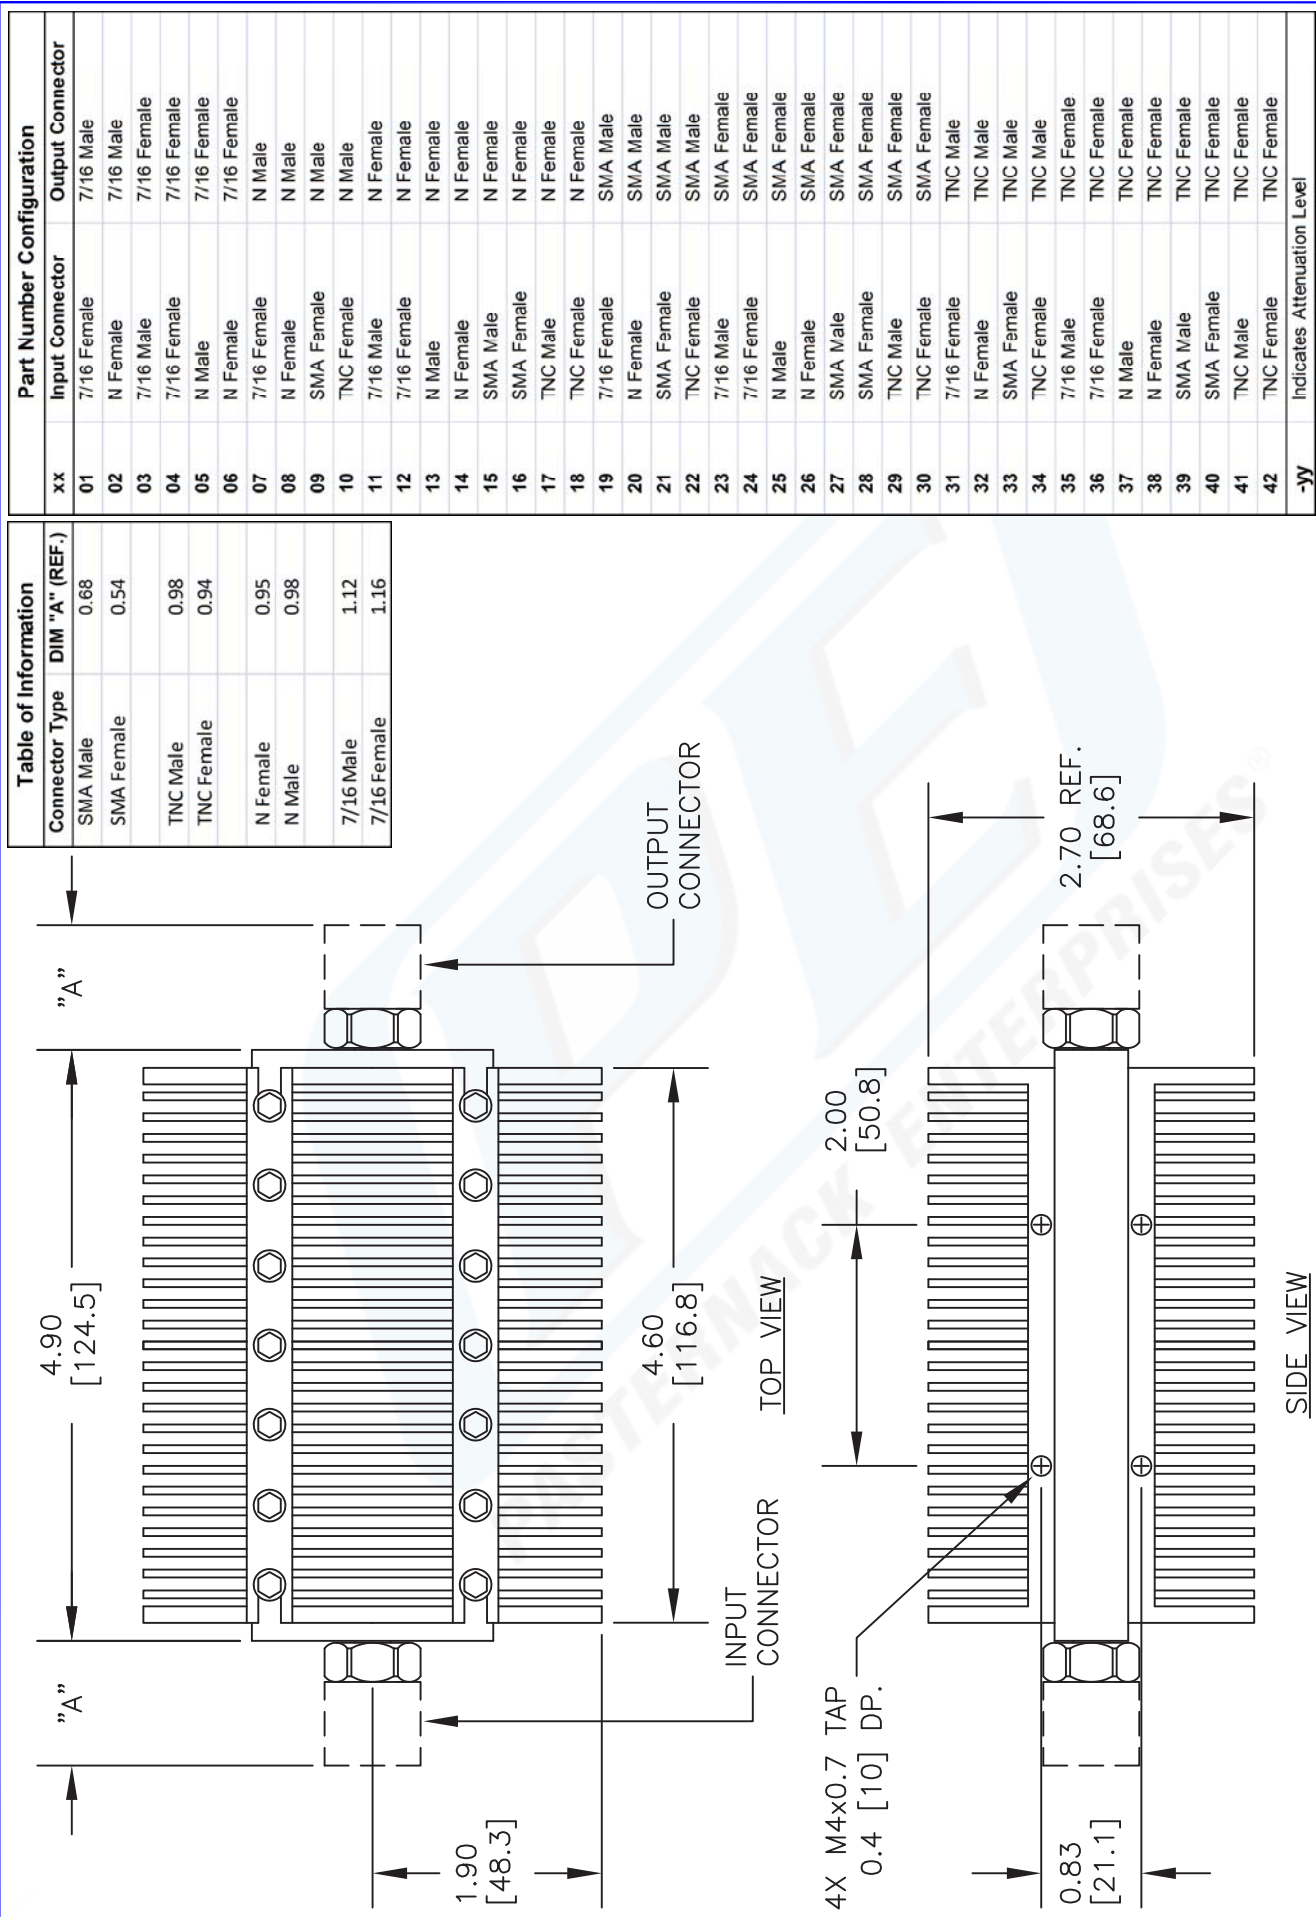

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE72xx-yy**

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 091412

SCALE N/A

SIZE A

2233