



6 dB Fixed Attenuator, N Female To N Male  
Directional Rated To 50 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7317-6

6 dB Fixed Attenuator, N Female To N Male Directional Rated To 50 Watts Up To 18 GHz

**Configuration**

Design	Fixed, Directional Attenuator
Connector 1	N Female
Connector 2	N Male
Body Material and Plating	Aluminum Heatsink, Black Anodized

**Electrical Specifications**

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Attenuation Value, dB	6
Maximum Input Power, Watts	50
Maximum VSWR	1.6:1

**Frequency 1**

Range, GHz	DC to 6
VSWR	1.3:1
Attenuation Accuracy, dB	0.75

**Frequency 2**

Range, GHz	6 to 12.4
VSWR	1.45:1
Attenuation Accuracy, dB	0.75

**Frequency 3**

Range, GHz	12.4 to 18
VSWR	1.6:1
Attenuation Accuracy, dB	1

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-55 to +125
------------------------	-------------

**Size**

Length, in [mm]	4.01 [101.85]
Width, in [mm]	3 [76.2]
Height, in [mm]	3 [76.2]
Weight, lbs [g]	1.796 [814.65]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dB Fixed Attenuator, N Female To N Male Directional Rated To 50 Watts Up To 18 GHz PE7317-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



6 dB Fixed Attenuator, N Female To N Male  
Directional Rated To 50 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7317-6

**Connector 1**

Type	N Female
Contact Material and Plating	Brass, Gold
Hex Size, In.	11/16
Body Material and Plating	Stainless Steel, Passivated

**Connector 2**

Type	N Male
Contact Material and Plating	Brass, Gold
Outer Conductor Material and Plating	Brass, Silver
Hex Size, In.	11/16
Body Material and Plating	Stainless Steel, Passivated

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

**Plotted and Other Data**

Notes:	Values at 25 °C, sea level OUTPUT PORT HANDLES 5 WATTS MAX POWER
URL:	<a href="http://www.pasternack.com/6db-fixed-n-female-n-male-50-watts-attenuator-pe7317-6-p.aspx">http://www.pasternack.com/6db-fixed-n-female-n-male-50-watts-attenuator-pe7317-6-p.aspx</a>


6 dB Fixed Attenuator, N Female To N Male Directional Rated To 50 Watts Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE7317-6 CAD Drawing

6 dB Fixed Attenuator, N Female To N Male Directional Rated To 50 Watts Up To 18 GHz

Table of Information		
Connector Type	DIM "A" (REF.)	
SMA Male	0.68	
SMA Female	0.54	
TNC Male	0.98	
TNC Female	0.94	
N Female	0.95	
N Male	0.98	
7/16 Male	1.12	
7/16 Female	1.16	

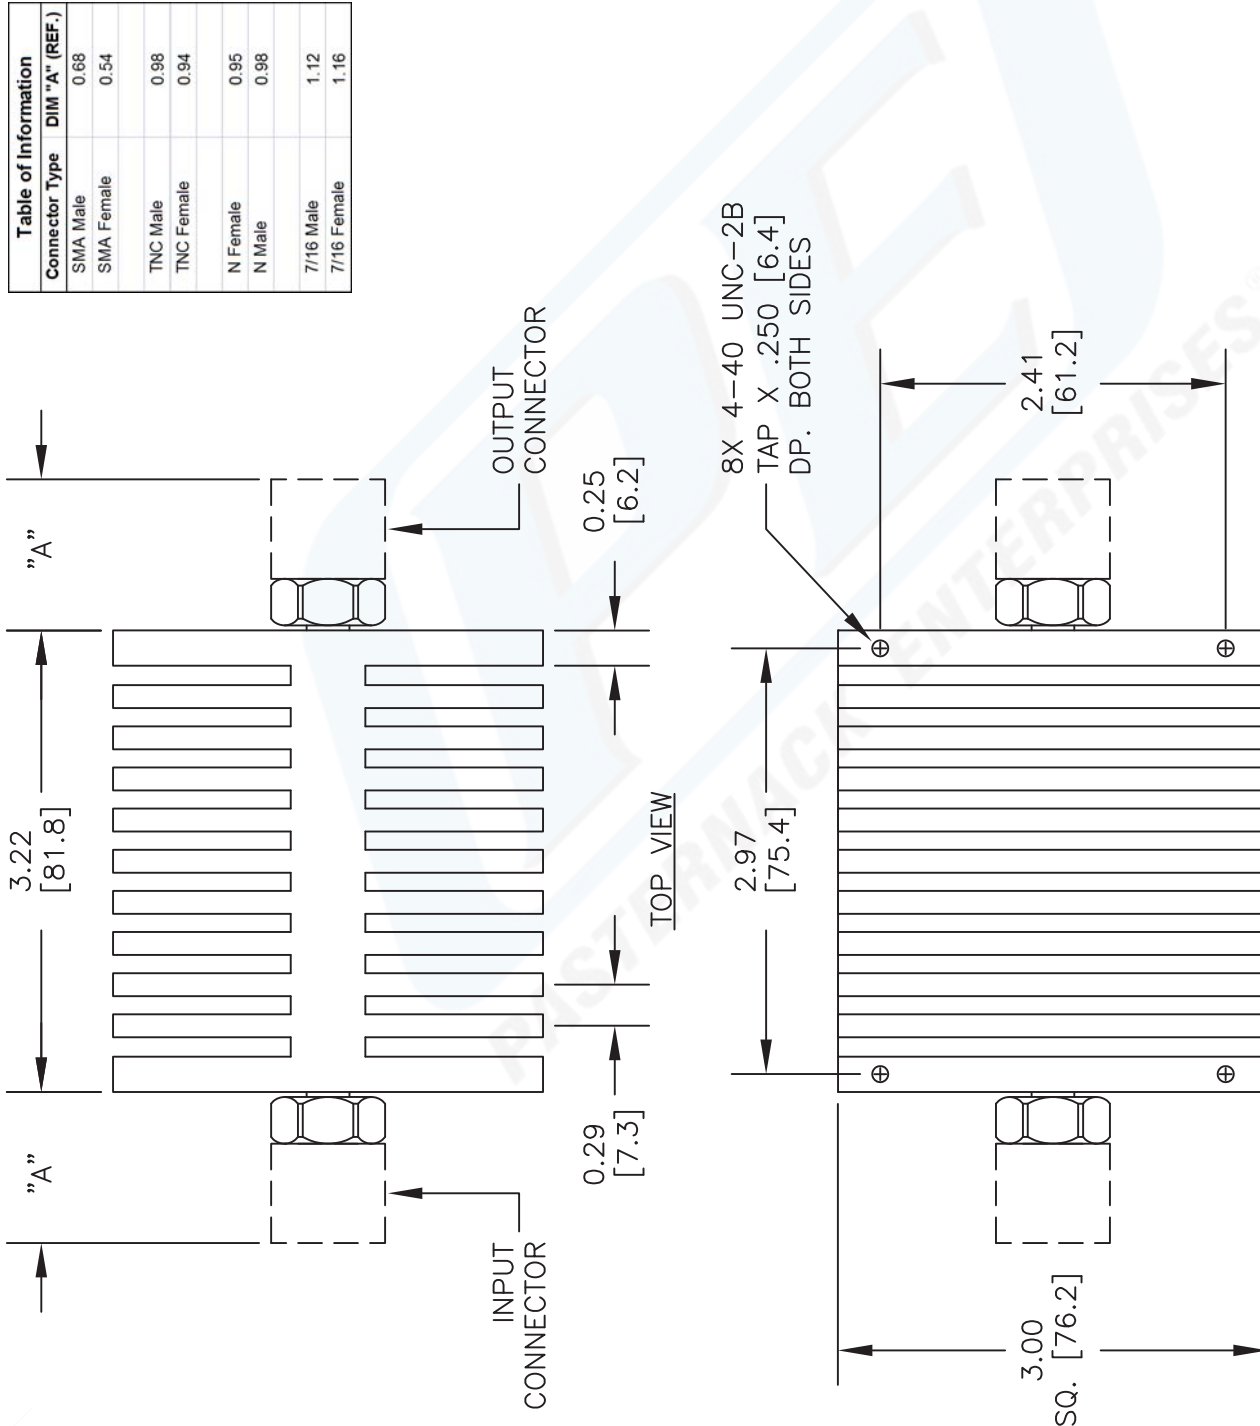

DWG TITLE

**PE73xx-yy**

**PE PASTERNAK®**

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

**FSCM NO. 53919**

CAD FILE 102512

SCALE N/A

SIZE A

2233