



## N Female to HN Male Adapter

### RF Adapters Technical Data Sheet

PE9194

#### Configuration

- N Female Connector 1
- HN Male Connector 2
- 50 Ohms
- Straight Body Geometry

#### Features

- Max VSWR of 1.3:1 up to 10 GHz
- N Interface compliant with MIL-STD-348A
- HN Interface compliant with MIL-STD-348A
- Gold Plated Brass Contact
- 30 µ-in min Gold Contact Plating

#### Applications

- Allows Connection Between Series
- General Purpose Test

#### Description

Pasternack's PE9194 type N female to HN male adapter is part of our full line of RF components available for same-day shipping. Our type N to HN adapter has a female to male gender configuration. PE9194 type N female to HN male adapter operates to 10 GHz. The Pasternack RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.3:1	
Operating Voltage (AC)			1,000	Vrms

#### Mechanical Specifications

<b>Size</b>	
Length	1.575 in [40.01 mm]
Width	0.866 in [22 mm]
Weight	0.137 lbs [62.14 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to HN Male Adapter PE9194](#)



## N Female to HN Male Adapter

### RF Adapters Technical Data Sheet

PE9194

Description	Connector 1	Connector 2
Type	N Female	HN Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A

#### Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	N Female		HN Male	
Contact	Brass	Gold 30 µ-in minimum	Brass	Gold 30 µ-in minimum
Insulation	PTFE		PTFE	
Outer Conductor	Brass	Nickel 100 µ-in minimum		
Body			Brass	Nickel 100 µ-in minimum
Gasket			Silicone	
Coupling Nut			Brass	Nickel 100 µ-in minimum

#### Environmental Specifications

##### Temperature

Operating Range

-65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to HN Male Adapter PE9194](#)



## N Female to HN Male Adapter

### RF Adapters Technical Data Sheet

PE9194


N Female to HN Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to HN Male Adapter PE9194](https://www.pasternack.com/n-female-hn-male-straight-adapter-pe9194-p.aspx)

URL: <https://www.pasternack.com/n-female-hn-male-straight-adapter-pe9194-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9194 CAD Drawing  
N Female to HN Male Adapter

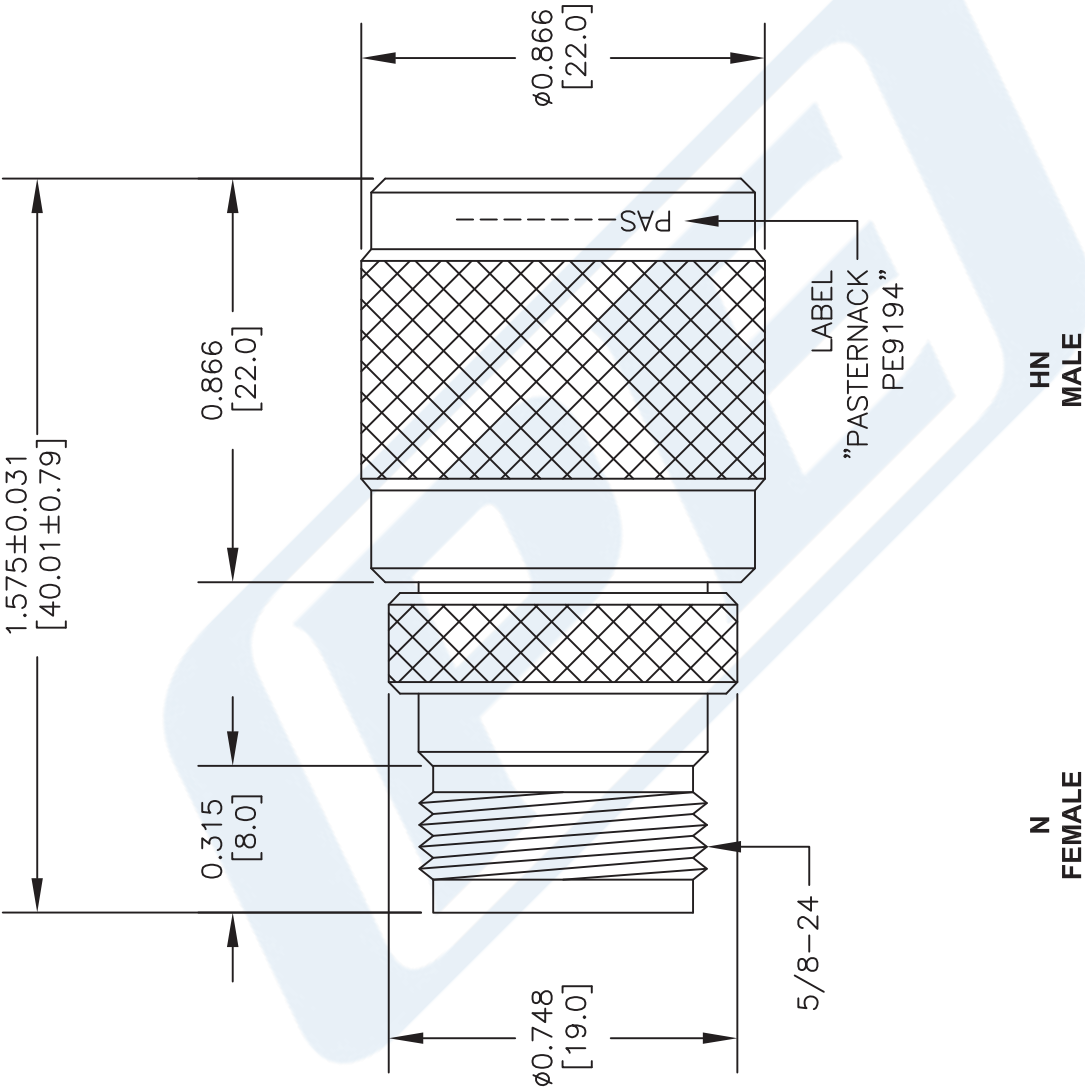

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

<div><div><div><div><div><div></div><div><b>PE</b></div></div></div><div><div><div><b>PASTERNAK®</b></div><div>THE ENGINEER'S RF SOURCE</div></div></div></div><div><div><div>Pasternack Enterprises, Inc.</div><div>P.O. Box 16759   Irvine   CA   92623</div><div>Phone: (949) 261-1920   Fax: (949) 261-7451</div><div>Website: www.pasternack.com   E-Mail: sales@pasternack.com</div></div></div></div></div>		DWG TITLE	
PE9194		FSCM NO. 53919	
NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].		CAD FILE	021016
		SCALE	N/A
		SIZE	A
			3045