

Low Loss .086 Semi-Rigid Coax Cable, Tin Plated  
Copper Outer Conductor, Microporous PTFE  
76.5 pct VoP Dielectric, Straight Sections

RF Cables  
Technical Data Sheet

PECX006

**Configuration**

- Low Loss Semi-Rigid Cable
- 1 Shield(s)

**Features**

- Continuous Copper Outer Conductor
- Low Density Microporous Dielectric
- Phase Stability vs. Temperature
- Mechanical Stability vs. Temperature
- High Isolation
- Supplied in 5 foot maximum straight lengths

**Applications**

- Low Loss Cabling
- Phase Matched Microporous
- Cables
- High Isolation Interconnects
- Surface Mount Cabling
- Semi-Rigid Cable Assemblies

**Description**

Pasternack’s PECX006 low loss semi-rigid coax with copper outer conductor and microporous dielectric is part of our full line of RF components available for same-day shipping. This low loss semi-rigid coaxial cable operates to a maximum frequency range of 62 GHz. The outer conductor is served by a continuous copper tube which provides extremely high levels of RF shielding and low attenuation. The low density microporous dielectric of this semi rigid coax reduces the dielectric losses and also provides more phase stability over temperature when compared to solid PTFE dielectric. An additional benefit of the microporous dielectric is its mechanical stability over temperature. Unlike solid PTFE, this low density PTFE material can handle soldering heat with minimal or no measurable extrusion on the ends of the cable. This minimizes stress on connectors and allows for more predictable termination on PCB, surface mount applications.

Our microporous dielectric low loss semi-rigid coax cable, PECX006 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack’s broad catalog of RF, microwave and millimeter wave interconnects allows designers to configure and customize their signal connections however they like. Whether the need is to provide a high isolation, phase stable signal path or simply create a custom cable assembly configuration, Pasternack has the right cable for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		62	GHz
Impedance		50.2		Ohms
Velocity of Propagation		76.5		%

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: [Low Loss .086 Semi-Rigid Coax Cable, Tin Plated Copper Outer Conductor, Microporous PTFE 76.5 pct VoP Dielectric, Straight Sections PECX006](#)

Low Loss .086 Semi-Rigid Coax Cable, Tin Plated  
 Copper Outer Conductor, Microporous PTFE  
 76.5 pct VoP Dielectric, Straight Sections

RF Cables  
 Technical Data Sheet

PECX006

**Performance by Frequency Band**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	5	10	18	26.5	GHz
Attenuation, Typ	12	39	56	77	96	dB/100ft
	39.37	127.95	183.73	252.62	314.96	dB/100m
Input Power (CW), Max	250	77	52	32	26	Watts

**Mechanical Specifications**

Min. Bend Radius (Installation) 0.25 in [6.35 mm]

**Construction Specifications**

Description	Material and Plating	Diameter
Inner Conductor	Copper, Silver, 1 Strand ASTM B-298	0.023 in 0.58 mm
Conductor Type	Solid	
Dielectric	Microporous PTFE	0.066 in [1.68 mm]
Outer Conductor	Copper, Tin MIL-T-10727	0.087 in 2.21 mm

**Environmental Specifications**

**Temperature**

Operating Range -65 to +225 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low Loss .086 Semi-Rigid Coax Cable, Tin Plated Copper Outer Conductor, Microporous PTFE 76.5 pct VoP Dielectric, Straight Sections PECX006](#)

Low Loss .086 Semi-Rigid Coax Cable, Tin Plated  
Copper Outer Conductor, Microporous PTFE  
76.5 pct VoP Dielectric, Straight Sections

RF Cables  
Technical Data Sheet

PECX006

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Low Loss .086 Semi-Rigid Coax Cable, Tin Plated Copper Outer Conductor, Microporous PTFE 76.5 pct VoP Dielectric, Straight Sections from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low Loss .086 Semi-Rigid Coax Cable, Tin Plated Copper Outer Conductor, Microporous PTFE 76.5 pct VoP Dielectric, Straight Sections PECX006](#)

URL: <https://www.pasternack.com/low-loss-semirigid-086-coax-cable-tin-plated-copper-straight-pecx006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PECX006 CAD Drawing

Low Loss .086 Semi-Rigid Coax Cable, Tin Plated Copper Outer Conductor, Microporous PTFE 76.5 pct VoP Dielectric, Straight Sections

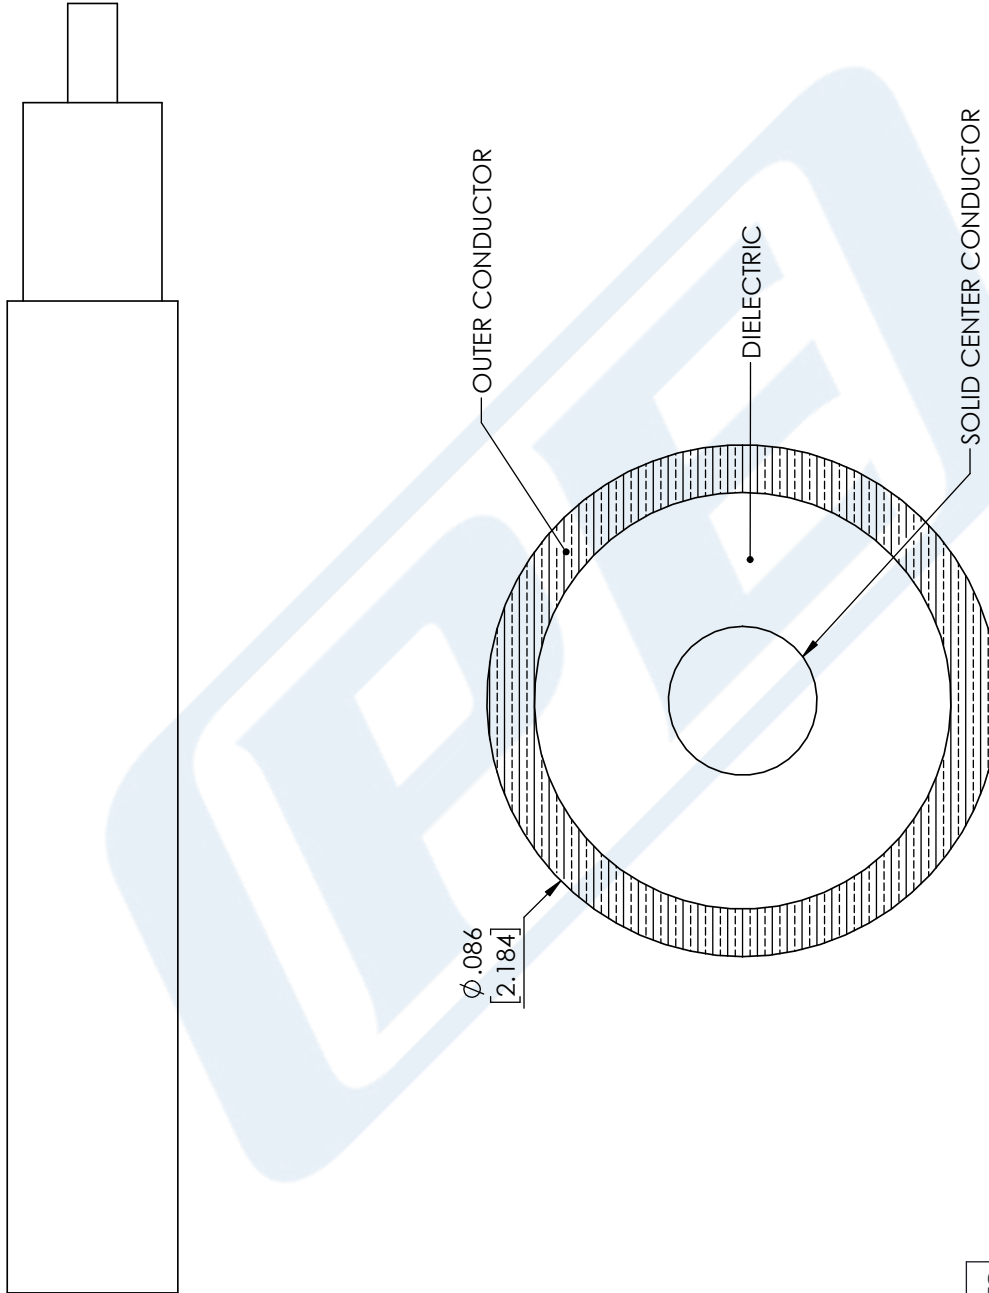

**STANDARD TOLERANCES**

- .X ±0.2
- .XX ±0.01
- .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

PECX006

**CAGE CODE 53919**

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 06/14/18

SCALE N/A

SIZE A

CN2245