



WR-137 to WR-112 Waveguide Transition 6 Inch Length,
CPR-137G Grooved Flange to CPR-112G Grooved Flange

Waveguide Transitions Technical Data Sheet

PEWTS1001

Features

- Transitions from WR-137 to WR-112 waveguide
- WR-137 waveguide CPR-137G flange
- WR-112 waveguide CPR-112G flange
- Painted finish
- Grooved Flange

Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PEWTS1001 is part of Pasternack's Waveguide Transitions (also sometimes called waveguide adapters) used as a means of propagating RF/Microwave energy from one waveguide size to another. The PEWTS1001 allows the waveguide to change from a WR-137 waveguide (using a CPR-137G flange) to a WR-112 waveguide (using a CPR-137G flange).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
VSWR		1.08:1		

Mechanical Specifications

Size

Length

6 in [152.4 mm]

Weight

1.42 lbs [644.1 g]

Description	Flange 1	Waveguide	Flange 2
Designation	None	WR-137 to WR-112	None
Flange Type	CPR-137G		CPR-112G
Material	Brass	Brass	Brass

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 to WR-112 Waveguide Transition 6 Inch Length, CPR-137G Grooved Flange to CPR-112G Grooved Flange PEWTS1001](#)




WR-137 to WR-112 Waveguide Transition 6 Inch Length,
CPR-137G Grooved Flange to CPR-112G Grooved Flange

Waveguide Transitions Technical Data Sheet

PEWTS1001

Typical Performance Data

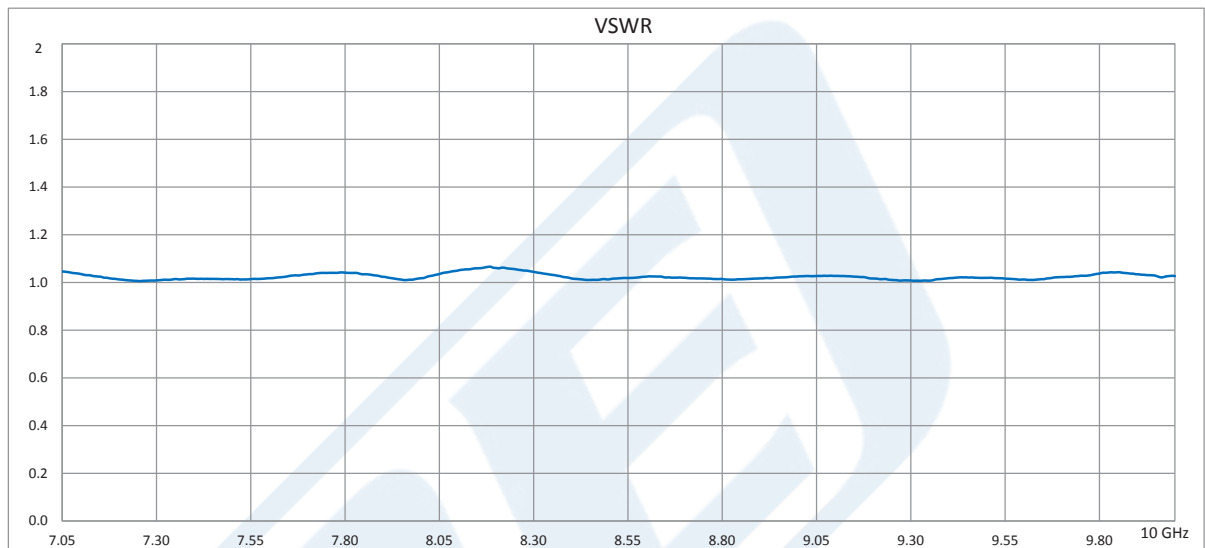

WR-137 to WR-112 Waveguide Transition 6 Inch Length, CPR-137G Grooved Flange to CPR-112G Grooved Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 to WR-112 Waveguide Transition 6 Inch Length, CPR-137G Grooved Flange to CPR-112G Grooved Flange PEWTS1001](http://www.pasternack.com/wr137-wr112-waveguide-transition-cpr-137g-grooved-cpr-112g-grooved-pewts1001-p.aspx)

URL: <http://www.pasternack.com/wr137-wr112-waveguide-transition-cpr-137g-grooved-cpr-112g-grooved-pewts1001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

WR-137 to WR-112 Waveguide Transition 6 Inch Length, CPR-137G Grooved Flange to CPR-112G Grooved Flange

WR-137 to WR-112 Waveguide Transition 6 Inch Length, CPR-137G Grooved Flange to CPR-112G Grooved Flange

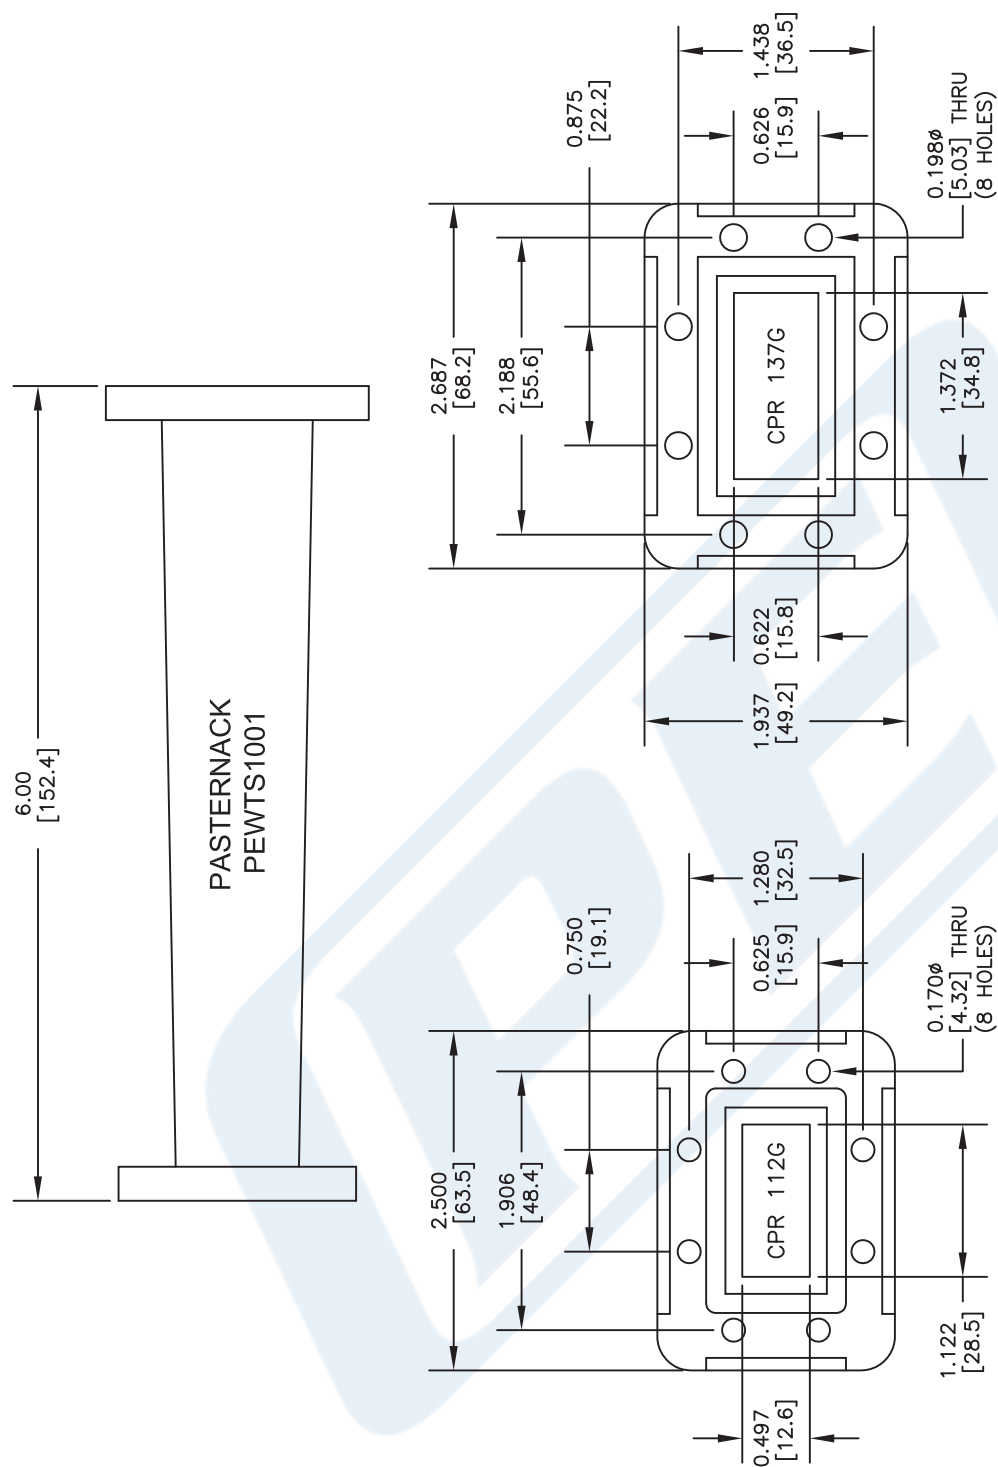

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

***STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES**

PE **PASTERNAK®**
THE ENGINEER'S RF SOURCE

THE ENGINEER'S RF SOURCE

Pasternack Enterprises Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Phone: (345) 201-1921 | Fax: (345) 201-1741
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PEWTS1001

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

FSCM NO. 53919

CAD FILE 010616

SCALE N/A

SIZE A

2233