



7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375

RF Connectors Technical Data Sheet



TC-SPP375-716M-LP

Times Microwave Systems Connector Specification

Configuration

- 7/16 DIN Male Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: SPP-375-LLPL, SPO-375, SPF-375
- Low PIM Design

Features

- Max. Operating Frequency 6 GHz
- Excellent VSWR of 1.25:1
- PIM levels lower than -160 dBc
- Silver Plated Brass Contact
- 5 µin contact plating

Applications

- General Purpose Test
- Custom Cable Assemblies
- Distributed Antenna Systems (DAS)
- Wireless Communications
- Low PIM Applications

Description

Times Microwave's TC-SPP375-716M-LP 7/16 DIN male connector offered by Pasternack with solder/solder attachment for Times' SPP-375-LLPL, SPO-375 and SPF-375 is part of our full line of RF components available for same-day shipping. Times Microwave's 7/16 DIN male connector operates up to a maximum frequency of 6 GHz and offers excellent VSWR of 1.25:1. The Times 7/16 DIN male connector also has low passive intermodulation of -160 dBc.

Times Microwave's 7/16 DIN male connector TC-SPP375-716M-LP datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Insertion Loss			0.1	dB
Passive Intermodulation			-160	dBc
Inner Conductor DC Resistance			0.4	mOhms
Outer Conductor DC Resistance			1.5	mOhms
Insulation Resistance	5,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375 TC-SPP375-716M-LP](#)



7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375

RF Connectors Technical Data Sheet



TC-SPP375-716M-LP

Mechanical Specifications

Size

Length 1.5 in [38.1 mm]
Width/Dia. 1.14 in [28.96 mm]

Mating Torque 265.52 in-lbs [30.00 Nm]

Material Specifications

Description	Material	Plating
Contact	Brass	Silver 5 µin
Insulation	PTFE	
Body	Brass	Tri-Metal 3 µin
Coupling Nut	Brass	Tri-Metal 3 µin

Environmental Specifications

Temperature

Operating Range -55 to +155 deg C
Shock US MIL-STD 202G
Vibration US MIL-STD 202G
Thermal Shock US MIL-STD 202G

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375 TC-SPP375-716M-LP](#)



7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375

RF Connectors Technical Data Sheet



TC-SPP375-716M-LP

7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.




Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Low PIM Connector Solder Attachment for SPP-375-LLPL, SPO-375, SPF-375 TC-SPP375-716M-LP](https://www.pasternack.com/7-16-din-male-spp-375-llpl-connector-tc-spp375-716m-lp-p.aspx)

URL: <https://www.pasternack.com/7-16-din-male-spp-375-llpl-connector-tc-spp375-716m-lp-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

TIMES MICROWAVE SYSTEMS **TC-SPP375-716M-LP CAD Drawing**
 7/16 DIN Male Low PIM Connector Solder Attachment
 for SPP-375-LLPL, SPO-375, SPF-375

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/24/19	S. ELLIS

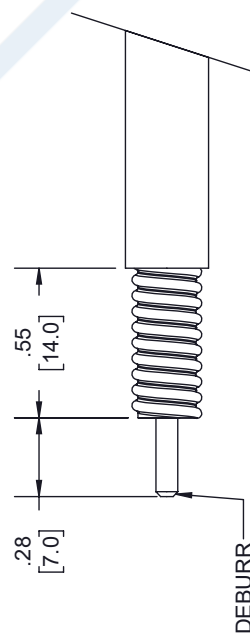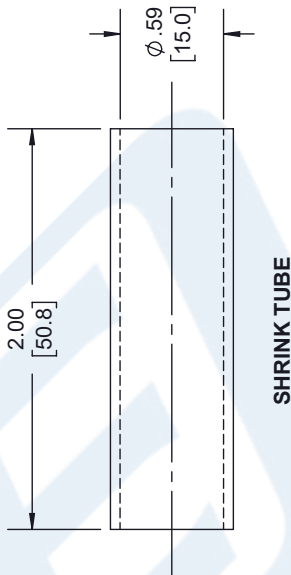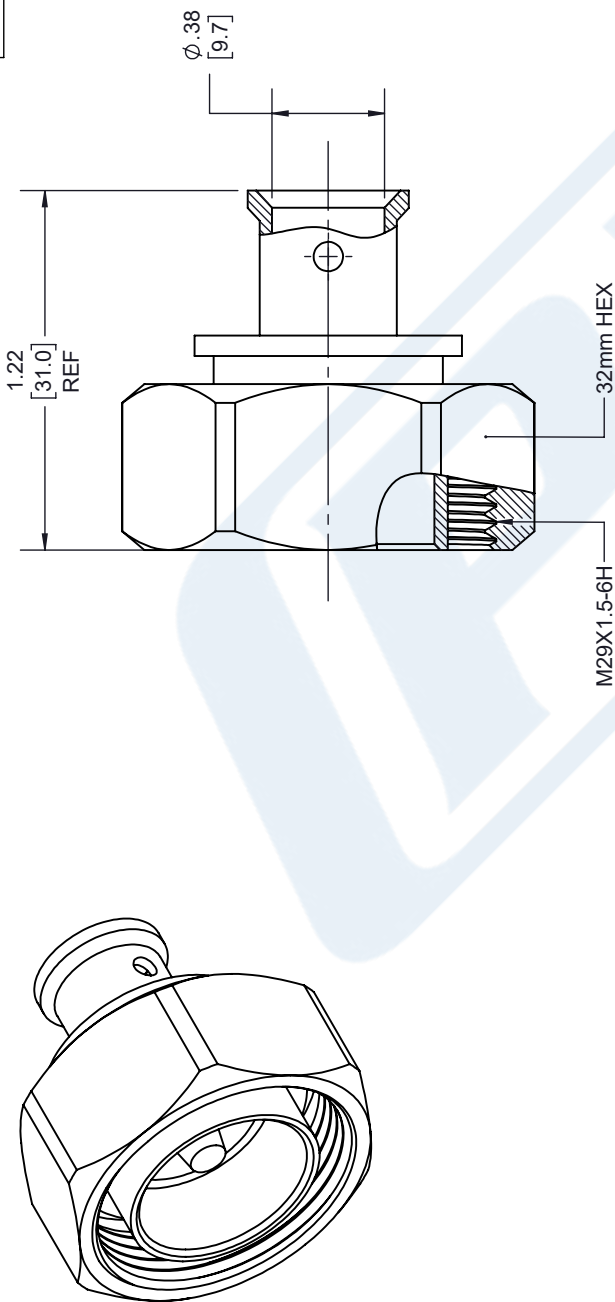

STRIPPING DIMENSIONS

NOTES:

- CABLE ATTACHMENT:
 - OUTER: SOLDER.
 - INNER: SOLDER.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS		PE PASTERNAK an INFINITI brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.	
TOLERANCES: X== 2 [5.08] FRACTIONS XX== 01 [25] ±1/32 XXX== 005 [13] ANGLES ±1°		ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		SHEET 1 OF 1 SCALE N/A	
THIRD ANGLE PROJECTION		PART NUMBER TC-SPP375-716M-LP		REV A	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.