

连接器编号

所示规则参数只用于标识目的

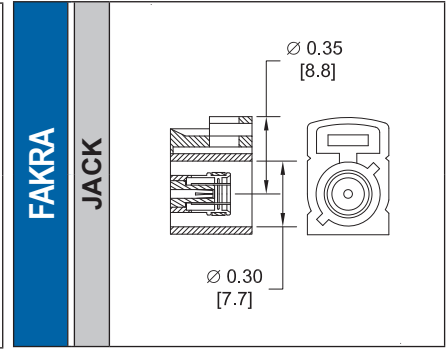
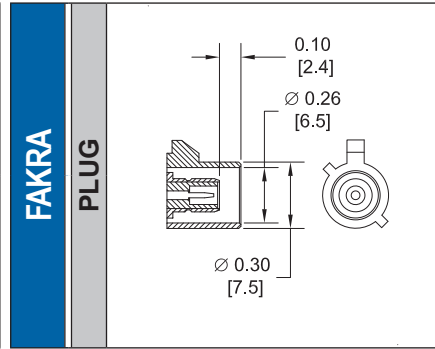
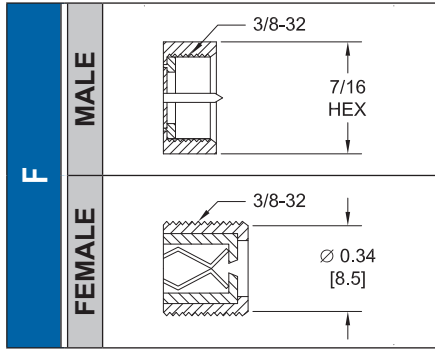
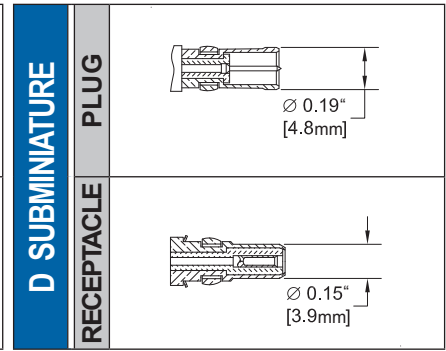
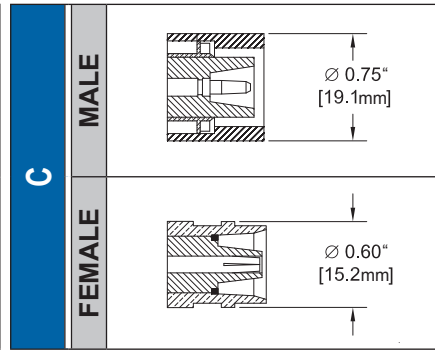
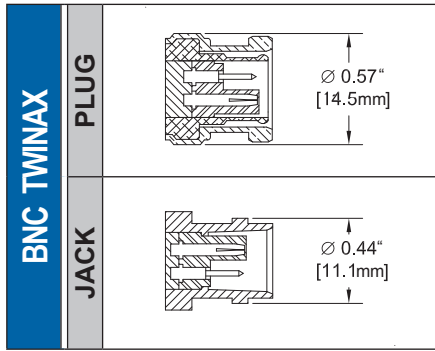
1.0/2.3 SLIDE ON	PLUG	
	JACK	
1.85 mm**	MALE	
	FEMALE	
2.4 mm**	MALE	
	FEMALE	
2.92 mm*	MALE	
	FEMALE	
3.5 mm*	MALE	
	FEMALE	
7 mm	PLUG	
	JACK	
7/16	PLUG	
	JACK	
3/4-20 TWINAX	MALE	
	FEMALE	
10-32	MALE	
	FEMALE	
BANANA	PLUG	
	JACK	
BNC	MALE	
	FEMALE	
REVERSE POLARITY BNC	MALE	
	FEMALE	
75 OHM BNC	MALE	
	FEMALE	

*SMA, 2.92mm, & 3.5mm CONNECTORS WILL MATE MECHANICALLY & ELECTRICALLY TO EACH OTHER.

**1.85mm & 2.4mm CONNECTORS WILL MATE MECHANICALLY & ELECTRICALLY TO EACH OTHER.

连接器编号

所示规则参数只用于标识目的

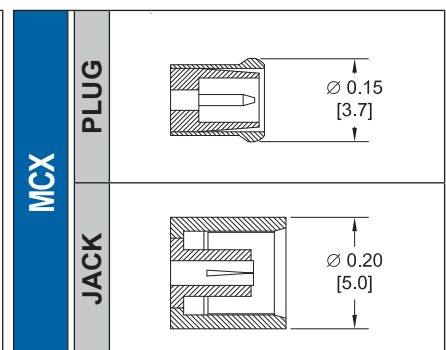
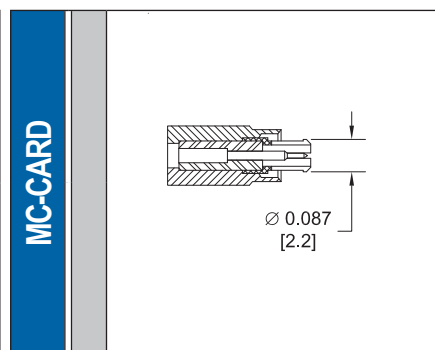
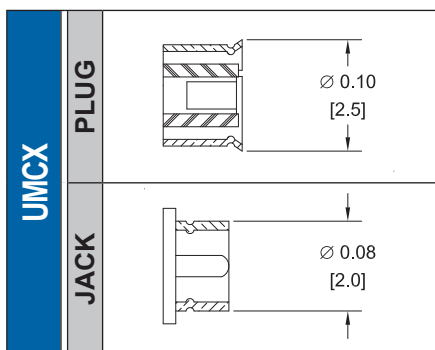
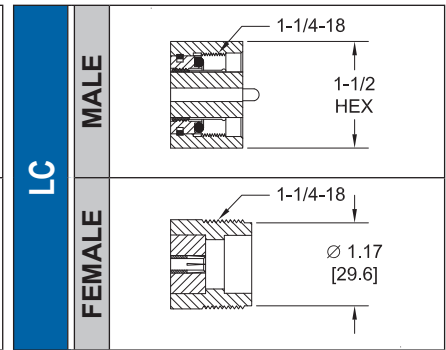
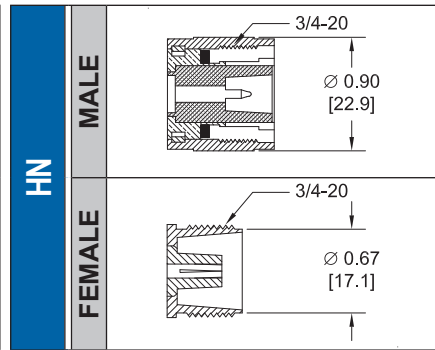
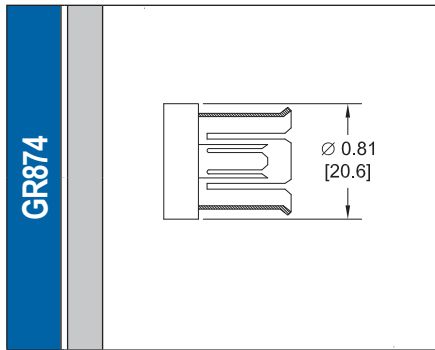
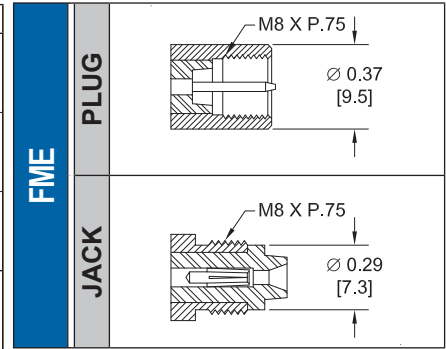


FAKRA

COMPLETE KEY CODE INFO































CODE	JACK	PLUG	COLOR	APPLICATION
A			BLACK	RADIO WITH PHANTOM SUPPLY
B			WHITE	RADIO WITHOUT PHANTOM SUPPLY
C			BLUE	GPS: TELEMATICS OR NAVIGATION
D			BORDEAUX	GSM: CELLULAR PHONE

CODE	JACK	PLUG	COLOR	APPLICATION
H			VIOLET	GPS: TELEMATICS AND NAVIGATION
I			BEIGE	BLUETOOTH
K			CURRY	RADIO WITH I.F. OUTPUT (ANTENNA DIVERSITY)
Z			WATER BLUE	NEUTRAL CODING

































连接器编号

所示规则参数只用于标识目的

REVERSE POLARITY MCX	PLUG	 $\varnothing 0.15"$ [3.7mm]
	JACK	 $\varnothing 0.20"$ [5.0mm]
MINI 75 OHM SMB	PLUG	 $\varnothing 0.25$ [6.4]
	JACK	 $\varnothing 0.14$ [3.7]
MMCX	PLUG	 $\varnothing 0.09$ [2.4]
	JACK	 $\varnothing 0.14$ [3.5]
75 OHM N	MALE	 5/8-24 $\varnothing 0.80$ [20.3]
	FEMALE	 5/8-24 $\varnothing 0.55$ [14.0]
QMA	MALE	 $\varnothing 0.41$ [10.5]
	FEMALE	 $\varnothing 0.19$ [4.9]
75 OHM MCX	PLUG	 $\varnothing 0.15"$ [3.7mm]
	JACK	 $\varnothing 0.20"$ [5.0mm]
MINI SMP	MALE	 $\varnothing 0.11"$ [2.8]
	FEMALE	 $\varnothing 0.09"$ [2.2]
N	MALE	 5/8-24 $\varnothing 0.80$ [20.3]
	FEMALE	 5/8-24 $\varnothing 0.55$ [14.0]
PAL	PLUG	 $\varnothing 0.38$ [9.5]
	JACK	 $\varnothing 0.37$ [9.4]
RCA	PLUG	 $\varnothing 0.37$ [9.3] $\varnothing 0.13$ [3.2]
	JACK	 $\varnothing 0.33$ [8.4]
MHV	MALE	 $\varnothing 0.57"$ [14.5mm]
	FEMALE	 $\varnothing 0.44"$ [11.1mm]
MINI-UHF	MALE	 3/8-24 $\varnothing 0.45$ [11.5]
	FEMALE	 3/8-24 $\varnothing 0.31$ [7.8]
REVERSE POLARITY N	MALE	 5/8-24 $\varnothing 0.80$ [20.3]
	FEMALE	 5/8-24 $\varnothing 0.55$ [14.0]
POSITIVE SNAP	MALE	 $\varnothing 0.39$ [9.9]
	FEMALE	
SC	MALE	 11/16-24 $\varnothing 0.80$ [20.3]
	FEMALE	 11/16-24 $\varnothing 0.63$ [15.9]

连接器编号

所示规则参数只用于标识目的

SHV	PLUG	 Ø 0.57" [14.5mm]	SMA*	MALE	 1/4-36 5/16 HEX	REVERSE POLARITY SMA	MALE	 1/4-36 5/16 HEX
	JACK	 Ø 0.44" [11.1mm]		FEMALE	 1/4-36 Ø 0.21 [5.3]		FEMALE	 1/4-36 Ø 0.21" [5.3mm]
SMA REVERSE THREAD	MALE	 1/4-36 LEFT HAND THREAD 5/16 HEX	SMB	PLUG	 Ø 0.25 [6.4]	75 OHM SMB	PLUG	 Ø 0.37 [9.2]
	FEMALE	 1/4-36 LEFT HAND THREAD Ø 0.21 [5.3]		JACK	 Ø 0.14 [3.7]		JACK	 Ø 0.24 [6.2]
SMC	PLUG	 #10-32 1/4 HEX	75 OHM SMC	PLUG	 5/16-32 11/32 HEX	SMP	MALE	 Ø 0.15" [3.7]
	JACK	 #10-32 Ø 0.14 [3.7]		JACK	 5/16-32 Ø 0.24 [6.2]		FEMALE	 Ø 0.13" [3.3]
SSMA	MALE	 #10-36 1/4 HEX	SSMB	PLUG	 Ø 0.18 [4.7]	TNC	MALE	 7/16-28 Ø 0.59 [15.0]
	FEMALE	 #10-36 Ø 0.16 [4.1]		JACK	 Ø 0.10 [2.6]		FEMALE	 7/16-28 Ø 0.38 [9.6]
75 OHM TNC	MALE	 7/16-28 Ø 0.59 [15.0]	REVERSE POLARITY TNC	MALE	 7/16-28 Ø 0.59 [15.0]	UHF	MALE	 5/8-24 Ø 0.70 [17.8]
	FEMALE	 7/16-28 Ø 0.38 [9.6]		FEMALE	 7/16-28 Ø 0.38 [9.6]		FEMALE	 5/8-24 Ø 0.55 [14.0]

*SMA, 2.92mm & 3.5mm CONNECTORS WILL MATE MECHANICALLY & ELECTRICALLY TO EACH OTHER.